

0030



State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt
Governor
Kathleen Clarke
Executive Director
Lowell P. Braxton
Division Director

1594 West North Temple, Suite 1210
PO Box 145801
Salt Lake City, Utah 84114-5801
801-538-5340
801-359-3940 (Fax)
801-538-7223 (TDD)

November 9, 2001

Dan Meadors, General Manager
Canyon Fuel Company, LLC
HC 35 Box 380
Helper, UT 84526

Re: Approval for Abatement of NOV 39-01-1-1, Canyon Fuel Company, LLC, Skyline Mine, C/007/005-AM01J, Outgoing File

Dear Mr. Meadors:

The above-referenced amendment is approved effective November 9, 2001. A stamped incorporated copy is enclosed for your copy of the Mining and Reclamation Plan.

If you have any questions, please feel free to call me at (801) 538-5268.

Sincerely,

A handwritten signature in cursive script, appearing to read 'Pamela Grubaugh-Littig'.

Pamela Grubaugh-Littig
Permit Supervisor


sm

Enclosure

cc Joe Wilcox, OSM
Richard Manus, BLM
Elaine Zieroth, USFS (2)
Mark Page, Water Rights w/o
Dave Ariotti, DEQ w/o
Derris Jones, DWR w/o
Price Field Office

O:\007005.SKY\FINAL\App01J.doc

State of Utah

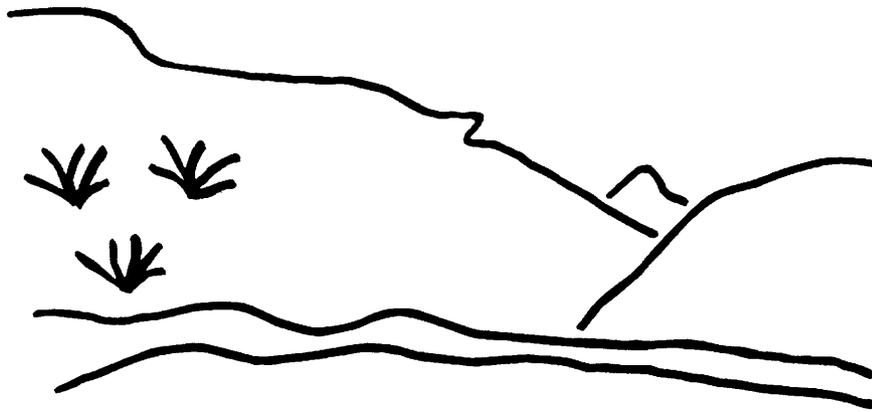

Utah Oil Gas and Mining

Coal Regulatory Program

Skyline Mine
Abatement of N39-01-1-1
C/007/005-AM01J
Technical Analysis
November 8, 2001

TABLE OF CONTENTS

INTRODUCTION..... 1
OPERATION PLAN 3
 HYDROLOGIC INFORMATION 3
 Sediment Control Measures 10
RULES INDEX 13

INTRODUCTION

TECHNICAL ANALYSIS

INTRODUCTION

On September 6, 2001 a Notice of Violation (NOV) was issued to Skyline Mine. Remedial actions were required within 30 days. An amendment to the Mining and Reclamation Plan was received by the Division on October 4, 2001. This Technical Memo is a review of the proposed amendment to determine if it complies with the required remedial action. The action does comply so there are no deficiencies.

INTRODUCTION

OPERATION PLAN

OPERATION PLAN

HYDROLOGIC INFORMATION

Regulatory Reference: 30 CFR 773.17, 774.13, 784.14, 784.16, 784.29, 817.41, 817.42, 817.43, 817.45, 817.49, 817.56, 817.57; R645-300-140, -300-141, -300-142, -300-143, -300-144, -300-145, -300-146, -300-147, -300-147, -300-148, -301-512, -301-514, -301-521, -301-531, -301-532, -301-533, -301-536, -301-542, -301-720, -301-731, -301-732, -301-733, -301-742, -301-743, -301-750, -301-761, -301-764.

Minimum Regulatory Requirements:

General

All underground mining and reclamation activities shall be conducted to minimize disturbance of the hydrologic balance within the permit and adjacent areas, to prevent material damage to the hydrologic balance outside the permit area, and to support approved postmining land uses in accordance with the terms and conditions of the approved permit and the performance standards of this part. The Division may require additional preventative, remedial, or monitoring measures to assure that material damage to the hydrologic balance outside the permit area is prevented. Mining and reclamation practices that minimize water pollution and changes in flow shall be used in preference to water treatment.

Groundwater Monitoring

In order to protect the hydrologic balance underground mining activities shall be conducted according to the hydrologic reclamation plan. Ground-water quality shall be protected by handling earth materials and runoff in a manner that minimizes acidic, toxic, or other harmful infiltration to ground-water systems and by managing excavations and other disturbances to prevent or control the discharge of pollutants into the ground water.

Ground-water monitoring shall be conducted according to the ground-water monitoring plan. The Division may require additional monitoring when necessary. Ground-water monitoring data shall be submitted every 3 months to the Division or more frequently as prescribed by the Division. Monitoring reports shall include analytical results from each sample taken during the reporting period. When the analysis of any ground-water sample indicates noncompliance with the permit conditions, the operator shall promptly notify the Division and immediately provide for any accelerated or additional monitoring necessary to determine the nature and extent of noncompliance and the results of the noncompliance. Plans and hydrologic information to evaluate and mitigate the noncompliance situation and information relevant to the PHC shall be submitted to the Division as required.

Ground-water monitoring shall proceed through mining and continue during reclamation until bond release. The Division may modify the monitoring requirements including the parameters covered and the sampling frequency if the operator demonstrates, using the monitoring data obtained, that: the operation has minimized disturbance to the prevailing hydrologic balance in the permit and adjacent areas and prevented material damage to the hydrologic balance outside the permit area; water quantity and quality are suitable to support approved postmining land uses; or, monitoring is no longer necessary to achieve the purposes set forth in the monitoring plan.

Equipment, structures, and other devices used in conjunction with monitoring the quality and quantity of ground water onsite and offsite shall be properly installed, maintained, and operated and shall be removed by the operator when no longer needed.

Surface Water Monitoring

In order to protect the hydrologic balance, underground mining activities shall be conducted according to the approved plan, and the following: surface-water quality shall be protected by handling earth materials, ground-water discharges, and runoff in a manner that minimizes the formation of acidic or toxic drainage; prevents, to the extent possible using the best technology currently available, additional contribution of suspended solids to streamflow outside the permit area; and otherwise prevent water pollution. If drainage control, restabilization and revegetation of disturbed areas, diversion of runoff, mulching, or other reclamation and remedial practices are not adequate to meet water-quality standards and effluent limitations, the operator shall use and maintain the necessary water-treatment facilities or water-quality controls. Surface-water quantity and flow rates shall be protected by handling earth materials and runoff in accordance with the steps outlined in the approved plan.

Surface-water monitoring shall be conducted according to the approved surface-water monitoring plan. The Division may require additional monitoring when necessary. Surface-water monitoring data shall be submitted every 3 months to the Division or more frequently as prescribed by the Division. Monitoring reports shall include analytical results from each sample taken during the

OPERATION PLAN

reporting period. When the analysis of any surface-water sample indicates noncompliance with the permit conditions, the operator shall promptly notify the Division and immediately provide for any accelerated or additional monitoring necessary to determine the nature and extent of noncompliance and the results of the noncompliance. Plans and hydrologic information to evaluate and mitigate the noncompliance situation and information relevant to the PHC shall be submitted to the Division as required. The reporting requirements of the water monitoring plan do not exempt the operator from meeting any National Pollutant Discharge Elimination System (NPDES) reporting requirements.

Surface-water monitoring shall proceed through mining and continue during reclamation until bond release. The Division may modify the monitoring requirements, except those required by the NPDES permitting authority, including the parameters covered and sampling frequency if the operator demonstrates, using the monitoring data obtained, that: the operation has minimized disturbance to the hydrologic balance in the permit and adjacent areas and prevented material damage to the hydrologic balance outside the permit area; water quantity and quality are suitable to support approved postmining land uses; and, monitoring is no longer necessary to achieve the purposes set forth in the approved monitoring plan.

Equipment, structures, and other devices used in conjunction with monitoring the quality and quantity of surface water onsite and offsite shall be properly installed, maintained, and operated and shall be removed by the operator when no longer needed.

Acid- and toxic-forming materials and underground development waste

Drainage from acid- and toxic-forming materials and underground development waste into surface water and ground water shall be avoided by: identifying and burying and/or treating, when necessary, materials which may adversely affect water quality, or be detrimental to vegetation or to public health and safety if not buried and/or treated; and, storing materials in a manner that will protect surface water and ground water by preventing erosion, the formation of polluted runoff, and the infiltration of polluted water.

Discharges into an underground mine

Discharges into an underground mine are prohibited, unless specifically approved by the Division after a demonstration that the discharge will: minimize disturbance to the hydrologic balance on the permit area, prevent material damage outside the permit area and otherwise eliminate public hazards resulting from underground mining activities; not result in a violation of applicable water quality standards or effluent limitations; be at a known rate and quality which shall meet the effluent limitations for pH and total suspended solids, except that the pH and total suspended solids limitations may be exceeded, if approved by the Division; and, meet with the approval of the Mine Safety and Health Administration.

Discharges shall be limited to the following: water; coal-processing waste; fly ash from a coal-fired facility; sludge from an acid-mine-drainage treatment facility; flue-gas desulfurization sludge; inert materials used for stabilizing underground mines; and, underground mine development wastes.

Water from one underground mine may be diverted into other underground workings according to the requirements of this section.

Gravity discharges from underground mines

Surface entries and accesses to underground workings shall be located and managed to prevent or control gravity discharge of water from the mine. The surface entries and accesses of drift mines first used after the implementation of a State, Federal, or Federal Lands Program and located in acid-producing or iron-producing coal seams shall be located in such a manner as to prevent any gravity discharge from the mine. Gravity discharges of water from an underground mine first used before the implementation of a State, Federal, or Federal Lands Program, may be allowed by the Division if it is demonstrated that the untreated or treated discharge complies with the performance standards and any additional NPDES permit requirements.

Water-quality standards and effluent limitations

Compliance with all applicable State and Federal water quality laws and regulations and with the effluent limitations for coal mining promulgated by the U.S. Environmental Protection Agency set forth in 40 CFR Part 434.

Diversions: General

With the approval of the Division, any flow from mined areas abandoned before May 3, 1978, and any flow from undisturbed areas or reclaimed areas, after meeting the criteria for siltation structure removal, may be diverted from disturbed areas by means of temporary or permanent diversions. All diversions shall be designed to minimize adverse impacts to the hydrologic balance within the permit and adjacent areas, to prevent material damage outside the permit area and to assure the safety of the public. Diversions shall not be used to divert water into underground mines without approval of the Division.

The diversion and its appurtenant structures shall be designed, located, constructed, and maintained to: be stable;

OPERATION PLAN

provide protection against flooding and resultant damage to life and property; prevent, to the extent possible using the best technology currently available, additional contributions of suspended solids to streamflow outside the permit area; and, comply with all applicable local, State, and Federal laws and regulations.

Temporary diversions shall be removed when no longer needed to achieve the purpose for which they were authorized. The land disturbed by the removal process shall be restored. Before diversions are removed, downstream water-treatment facilities previously protected by the diversion shall be modified or removed, as necessary, to prevent overtopping or failure of the facilities. This requirement shall not relieve the operator from maintaining water-treatment facilities as otherwise required.

A permanent diversion or a stream channel reclaimed after the removal of a temporary diversion shall be designed and constructed so as to restore or approximate the premining characteristics of the original stream channel including the natural riparian vegetation to promote the recovery and the enhancement of the aquatic habitat. The Division may specify additional design criteria for diversions.

Diversions: Perennial and intermittent streams

Diversion of perennial and intermittent streams within the permit area may be approved by the Division after making the finding relating to stream buffer zones that the diversions will not adversely affect the water quantity and quality and related environmental resources of the stream. The design capacity of channels for temporary and permanent stream channel diversions shall be at least equal to the capacity of the unmodified stream channel immediately upstream and downstream from the diversion. Protection against flooding and resultant damage to life and property shall be met when the temporary and permanent diversions for perennial and intermittent streams are designed so that the combination of channel, bank and flood-plain configuration is adequate to pass safely the peak runoff of a 10-year, 6-hour precipitation event for a temporary diversion and a 100-year, 6-hour precipitation event for a permanent diversion. The design and construction of all stream channel diversions of perennial and intermittent streams shall be certified by a qualified registered professional engineer as meeting the performance standards and any design criteria set by the Division.

Diversions: Miscellaneous flows

Diversion of miscellaneous flows, which consist of all flows except for perennial and intermittent streams, may be diverted away from disturbed areas if required or approved by the Division. Miscellaneous flows shall include ground-water discharges and ephemeral streams. The design, location, construction, maintenance, and removal of diversions of miscellaneous flows shall meet all of the general performance standards of this section. Protection against flooding and resultant damage to life and property shall be met when the temporary and permanent diversions for miscellaneous flows are designed so that the combination of channel, bank and flood-plain configuration is adequate to pass safely the peak runoff of a 2-year, 6-hour precipitation event for a temporary diversion and a 10-year, 6-hour precipitation event for a permanent diversion.

Stream buffer zones

No land within 100 feet of a perennial stream or an intermittent stream shall be disturbed by underground mining activities, unless the Division specifically authorizes underground mining activities closer to, or through, such a stream. The Division may authorize such activities only upon finding that: underground mining activities will not cause or contribute to the violation of applicable State or Federal water quality standards and will not adversely affect the water quantity and quality or other environmental resources of the stream; and, if there will be a temporary or permanent stream-channel diversion, it will comply with the regulatory requirements for diversions.

The area not to be disturbed shall be designated as a buffer zone, and the operator shall mark it accordingly with buffer zone markers.

Sediment control measures

Appropriate sediment control measures shall be designed, constructed, and maintained using the best technology currently available to: prevent, to the extent possible, additional contributions of sediment to stream flow or to runoff outside the permit area; meet the more stringent of applicable State or Federal effluent limitations; and, minimize erosion to the extent possible.

Sediment control measures include practices carried out within and adjacent to the disturbed area. The sedimentation storage capacity of practices in and downstream from the disturbed areas shall reflect the degree to which successful mining and reclamation techniques are applied to reduce erosion and control sediment. Sediment control measures consist of the utilization of proper mining and reclamation methods and sediment control practices, singly or in combination. Sediment control methods include but are not limited to: disturbing the smallest practicable area at any one time during the mining operation through progressive backfilling, grading, and prompt revegetation; stabilizing the backfilled material to promote a reduction of the rate and volume of runoff; retaining sediment within disturbed areas; diverting runoff away from disturbed areas; diverting runoff using protected channels or pipes through disturbed areas so as not to cause additional erosion; using straw dikes, riprap, check dams, mulches, vegetative sediment filters, dugout ponds, and other measures that reduce overland flow velocity, reduce runoff volume, or trap sediment; treating with chemicals; and, treating mine drainage in underground sumps.

Siltation Structures: General

All surface drainage from disturbed areas shall be passed through a siltation structure before leaving the permit area. Siltation structures shall mean a sedimentation pond, a series of sedimentation ponds, or other treatment facility. Other treatment facilities means any chemical treatments, such as flocculation, or mechanical structures, such as clarifiers, that have a point-source discharge and that are utilized to prevent additional contribution of suspended solids to streamflow or runoff outside the permit area.

Disturbed area requiring treatment through a siltation structure shall not include those areas in which the only underground mining activities include: diversion ditches, siltation structures, or roads that are designed, constructed and maintained in accordance with the regulatory requirements; and, for which the upstream area is not otherwise disturbed by the operator.

Additional contributions of suspended solids and sediment to streamflow or runoff outside the permit area shall be prevented to the extent possible using the best technology currently available. Siltation structures for an area shall be constructed before beginning any underground mining activities in that area, and upon construction shall be certified by a qualified registered professional engineer, or when authorized under the regulations, by a qualified registered professional land surveyor, to be constructed as designed and as approved in the reclamation plan.

Any siltation structure which impounds water shall be designed, constructed and maintained in accordance with the requirements for impoundments.

Siltation structures shall be maintained until removal is authorized by the Division and the disturbed area has been stabilized and revegetated. In no case shall the structure be removed sooner than 2 years after the last augmented seeding. When the siltation structure is removed, the land on which the siltation structure was located shall be regraded and revegetated in accordance with the reclamation plan. Sedimentation ponds approved by the Division for retention as permanent impoundments may be exempted from this requirement.

Any point-source discharge of water from underground workings to surface waters which does not meet effluent limitations shall be passed through a siltation structure before leaving the permit area.

Siltation Structures: Sedimentation ponds

Sedimentation ponds, when used, shall: be used individually or in series; be located as near as possible to the disturbed area and out of perennial streams unless approved by the Division; and, be designed, constructed, and maintained to:

- 1.) Provide adequate sediment storage volume;
- 2.) Provide adequate detention time to allow the effluent from the ponds to meet State and Federal effluent limitations;
- 3.) Contain or treat the 10-year, 24-hour precipitation event ("design event") unless a lesser design event is approved by the Division based on terrain, climate, other site-specific conditions and on a demonstration by the operator that the effluent limitations will be met;
- 4.) Provide a nonclogging dewatering device adequate to maintain the required time;
- 5.) Minimize, to the extent possible, short circuiting;
- 6.) Provide periodic sediment removal sufficient to maintain adequate volume for the design event;
- 7.) Ensure against excessive settlement;
- 8.) Be free of sod, large roots, frozen soil, and acid- or toxic-forming coal-processing waste; and
- 1.) Be compacted properly.

A sedimentation pond shall include either a combination of principal and emergency spillways or a single open-channel spillway configured as specified in this section, designed and constructed to safely pass the applicable design precipitation event. The Division may approve a single open-channel spillway that is: of nonerrodible construction and designed to carry sustained flows; or earth- or grass-lined and designed to carry short-term infrequent flows at non-erosive velocities where sustained flows are not expected.

The required design precipitation event for a sedimentation pond meeting the spillway requirements of this section is: for a sedimentation pond meeting the size or other criteria of 30 CFR Sec. 77.216(a), a 100-year 6-hour event, or greater event as specified by the Division; or, for a sedimentation pond not meeting the size or other criteria of 30 CFR Sec. 77.216(a), a 25-year 6-hour event, or greater event as specified by the Division.

In lieu of meeting the above spillway requirements, the Division may approve a sedimentation pond that relies primarily on storage to control the runoff from the design precipitation event when it is demonstrated by the operator and certified by a qualified registered professional engineer or, as applicable, a qualified registered professional land surveyor that; the sedimentation pond will safely control the design precipitation event; the water from which shall be safely removed in accordance with current, prudent, engineering practices; and, such a sedimentation pond shall be located where failure would not be expected to cause loss of life or serious property damage. If the sediment pond is located where failure would be expected to cause loss of life or serious property

OPERATION PLAN

damage, a sedimentation pond that relies primarily on storage to control the runoff from the design precipitation event may be allowed if, in addition to the design event, is: in the case of a sedimentation pond meeting the size or other criteria of 30 CFR Sec. 77.216(a), designed to control the precipitation of the probable maximum precipitation of a 6-hour event, or greater event as specified by the Division; or, in the case of a sedimentation pond not meeting the size or other criteria of 30 CFR Sec. 77.216(a), designed to control the precipitation of a 100-year 6-hour event, or greater event as specified by the Division.

Siltation Structures: Other treatment facilities

Other treatment facilities shall be designed to treat the 10-year, 24-hour precipitation even unless a lesser design event is approved by the Division based on terrain, climate, other site-specific conditions and a demonstration by the operator that the effluent limitations will be met. Other treatment facilities shall be designed, constructed and maintained accordance with the applicable requirements as described under sediment ponds.

Siltation Structures: Exemptions

Exemptions to the requirements of this section may be granted if: the disturbed drainage area within the total disturbed area is small; and, the operator demonstrates that siltation structures and alternate sediment control measures are not necessary for drainage from the disturbed drainage areas to meet effluent limitations and applicable State and Federal water-quality standards for the receiving waters.

Discharge structures

Discharge from sedimentation ponds, permanent and temporary impoundments, coal processing waste dams and embankments, and diversions shall be controlled, by energy dissipators, riprap channels, and other devices, where necessary, to reduce erosion, to prevent deepening or enlargement of stream channels, and to minimize disturbance of the hydrologic balance. Discharge structures shall be designed according to standard engineering design procedures.

Impoundments

The following requirements apply to both temporary and permanent impoundments:

- 1.) An impoundment meeting the size or other criteria of 30 CFR Sec. 77.216(a) shall comply with the requirements of 30 CFR Sec. 77.216 and this section.
- 2.) The design of impoundments shall be certified as designed to meet the requirements of the regulations using current, prudent, engineering practices and any design criteria established by the Division. The qualified, registered, professional engineer or qualified, registered, professional, land surveyor shall be experienced in the design and construction or impoundments.
- 3.) An impoundment meeting the size or other criteria of 30 CFR Sec. 77.216(a) or located where failure would be expected to cause loss of life or serious property damage shall have a minimum static safety factor of 1.5 for a normal pool with steady state seepage saturation conditions, and a seismic safety factor of at least 1.2. Impoundments not meeting the size or other criteria of 30 CFR Sec. 77.216(a), except for a coal mine waste impounding structure, and located where failure would not be expected to cause loss of life or serious property damage shall have a minimum static safety factor of 1.3 for a normal pool with steady state seepage saturation conditions. For an impoundment not meeting the size of other criteria of 30 CFR Sec. 77.216(a), where failure would not be expected to cause loss of life or serious property damage, the Division may establish engineering design standards that ensure stability comparable to a 1.3 minimum static safety factor in lieu of engineering tests to establish compliance with the minimum static safety factor of 1.3.
- 4.) Impoundments shall have adequate freeboard to resist overtopping by waves and by sudden increases in storage volume.
- 5.) Foundations and abutments for an impounding structure shall be stable during all phases of construction and operation and shall be designed based on adequate and accurate information on the foundation conditions. For an impoundment meeting the size or other criteria of 30 CFR Sec. 77.216(a), foundation investigation, as well as any necessary laboratory testing of foundation material, shall be performed to determine the design requirements for foundation stability. All vegetative and organic materials shall be removed and foundations excavated and prepared to resist failure. Cutoff trenches shall be installed if necessary to ensure stability.
- 6.) Slope protection shall be provided to protect against surface erosion at the site and protect against sudden drawdown.
- 7.) Faces of embankments and surrounding areas shall be vegetated, except that faces where water is impounded may be riprapped or otherwise stabilized in accordance with accepted design practices.
- 8.) Spillways: An impoundment shall include either a combination of principal and emergency spillways, a single open-channel spillway, or, be configured as an impoundment that relies primarily on storage to control the runoff from the applicable design precipitation event. The Division may approve a single open-channel spillway that is of nonerodible construction and designed to carry sustained flows; or, earth- or grass-lined and designed to carry short-term, infrequent flows at non-erosive velocities where sustained flows are not expected. Except impoundments that rely primarily on storage to control the runoff, the required design precipitation events for an

OPERATION PLAN

impoundment having spillways are: for an impoundment meeting the size or other criteria of 30 CFR Sec. 77.216(a) a 100-year 6-hour event, or greater event as specified by the Division; and, for an impoundment not meeting the size or other criteria of 30 CFR Sec. 77.216(a), a 25-year 6-hour event, or greater event as specified by the Division. In lieu of meeting the single open-channel spillway requirements, the Division may approve an impoundment that relies primarily on storage to control the runoff from the design precipitation event when it is demonstrated by the operator and certified by a qualified registered professional engineer or qualified registered professional land surveyor that the impoundment will safely control the design precipitation event, the water from which shall be safely removed in accordance with current, prudent, engineering practices. Such an impoundment shall be located where failure would not be expected to cause loss of life or serious property damage, except where: in the case of an impoundment meeting the size or other criteria of 30 CFR Sec. 77.216(a), it is designed to control the precipitation of the probable maximum precipitation of a 6-hour event, or greater event as specified by the Division; or, in the case of an impoundment not meeting the size or other criteria of 30 CFR Sec. 77.216(a), it is designed to control the precipitation of a 100-year 6-hour event, or greater event as specified by the Division.

- 9.) The vertical portion of any remaining highwall shall be located far enough below the low-water line along the full extent of highwall to provide adequate safety and access for the proposed water users.
- 10.) Inspections: Except as provided in paragraph (a)(10)(iv) of this section, a qualified registered professional engineer or other qualified professional specialist under the direction of a professional engineer, shall inspect each impoundment as provided in paragraph (a)(10)(i) of this section. The professional engineer or specialist shall be experienced in the construction of impoundments.

Inspections shall be made regularly during construction, upon completion of construction, and at least yearly until removal of the structure or release of the performance bond. The qualified registered professional engineer, or qualified registered professional land surveyor as applicable, shall promptly after each inspection provide to the Division a certified report that the impoundment has been constructed and/or maintained as designed and in accordance with the approved plan and this section. The report shall include discussion of any appearance of instability, structural weakness or other hazardous condition, depth and elevation of any impounded waters, existing storage capacity, any existing or required monitoring procedures and instrumentation, and any other aspects of the structure affecting stability. A copy of the report shall be retained at or near the minesite.

A qualified registered professional land surveyor may inspect any temporary or permanent impoundment that does not meet the size or other criteria of 30 CFR Sec. 77.216(a) and certify and submit the report required above, except that all coal mine waste impounding structures shall be certified by a qualified registered professional engineer. The professional land surveyor shall be experienced in the construction of impoundments. Impoundments subject to 30 CFR Sec. 77.216 must be examined in accordance with 30 CFR Sec. 77.216-3. Other impoundments shall be examined at least quarterly by a qualified person designated by the operator for appearance of structural weakness and other hazardous conditions.

If any examination or inspection discloses that a potential hazard exists, the person who examined the impoundment shall promptly inform the Division of the finding and of the emergency procedures formulated for public protection and remedial action. If adequate procedures cannot be formulated or implemented, the Division shall be notified immediately. The Division shall then notify the appropriate agencies that other emergency procedures are required to protect the public.

A permanent impoundment of water may be created, if authorized by the Division in the approved permit based upon the following demonstration:

- 1.) The size and configuration of such impoundment will be adequate for its intended purposes.
- 2.) The quality of impounded water will be suitable on a permanent basis for its intended use and, after reclamation, will meet applicable State and Federal water quality standards, and discharges from the impoundment will meet applicable effluent limitations and will not degrade the quality of receiving water below applicable State and Federal water quality standards.
- 3.) The water level will be sufficiently stable and be capable of supporting the intended use.
- 4.) Final grading will provide for adequate safety and access for proposed water users.
- 5.) The impoundment will not result in the diminution of the quality and quantity of water utilized by adjacent or surrounding landowners for agricultural, industrial, recreational, or domestic uses.
- 6.) The impoundment will be suitable for the approved postmining land use.

The Division may authorize the construction of temporary impoundments as part of underground mining activities.

Ponds, impoundments, banks, dams, and embankments

Each application shall include a general plan for each proposed sedimentation pond, water impoundment, and coal processing waste bank, dam, or embankment within the proposed permit area. Each general plan shall:

- 1.) Be prepared by, or under the direction of, and certified by a qualified, registered, professional engineer, a professional geologist, or in any State which authorizes land surveyors to prepare and certify such plans, a qualified, registered, professional land surveyor with assistance from experts in related fields such as landscape

OPERATION PLAN

- architecture;
- 2.) Contain a description, map, and cross section of the structure and its location;
 - 3.) Contain preliminary hydrologic and geologic information required to assess the hydrologic impact of the structure;
 - 4.) Contain a survey describing the potential effect on the structure from subsidence of the subsurface strata resulting from past underground mining operations if underground mining has occurred; and
 - 5.) Contain a certification statement which includes a schedule setting forth the dates when any detailed design plans for structures that are not submitted with the general plan will be submitted to the Division. The Division shall have approved, in writing, the detailed design plan for a structure before construction of the structure begins.

Each detailed design plan for a structure that meets or exceeds the size or other criteria of the Mine Safety and Health Administration, 30 CFR Section 77.216(a) shall:

- 1.) Be prepared by, or under the direction of, and certified by a qualified registered professional engineer with assistance from experts in related fields such as geology, land surveying, and landscape architecture;
- 2.) Include any geotechnical investigation, design, and construction requirements for the structure;
- 3.) Describe the operation and maintenance requirements for each structure; and
- 4.) Describe the timetable and plans to remove each structure, if appropriate.

Each detailed design plan for a structure that does not meet the size or other criteria of 30 CFR Section 77.216(a) shall:

- 1.) Be prepared by, or under the direction of, and certified by a qualified, registered, professional engineer, or in any State which authorizes land surveyors to prepare and certify such plans, a qualified, registered, professional land surveyor, except that all coal processing waste dams and embankments covered by Sections 817.81-817.84 of this Chapter shall be certified by a qualified, registered, professional engineer;
- 2.) Include any design and construction requirements for the structure, including any required geotechnical information;
- 3.) Describe the operation and maintenance requirements for each structure; and
- 4.) Describe the timetable and plans to remove each structure, if appropriate.

Sedimentation ponds, whether temporary or permanent, shall be designed in compliance with the requirements of Siltation Structures. Any sedimentation pond or earthen structure which will remain on the proposed permit area as a permanent water impoundment shall also be designed to comply with the requirements for Impoundments. Each plan shall, at a minimum, comply with the requirements of the Mine Safety and Health Administration, 30 CFR Sections 77.216-1 and 77.216-2.

Permanent and temporary impoundments shall be designed to comply with the requirements for Impoundments. Each plan for an impoundment meeting the size or other criteria of the Mine Safety and Health Administration shall comply with the requirements of 30 CFR Sec. 77.216-1 and 77.216-2. The plan required to be submitted to the District Manager of MSHA under Sec. 77.216 of this title shall be submitted to the Division as part of the permit application. For an impoundment not meeting the size or other criteria of 30 CFR Sec. 77.216(a) and located where failure would not be expected to cause loss of life or serious property damage, the Division may establish through the State program approval process engineering design standards that ensure stability comparable to a 1.3 minimum static safety factor in lieu of engineering tests to establish compliance with the minimum static safety factor of 1.3.

Coal processing waste banks, dams and embankments shall be designed to comply with the requirements for Coal Mine Waste. Each plan shall comply with the requirements of the Mine Safety and Health Administration, 30 CFR Sections 77.216-1 and 77.216-2, and shall contain the results of a geotechnical investigation of the proposed dam or embankment foundation area, to determine the structural competence of the foundation which will support the proposed dam or embankment structure and the impounded material. The geotechnical investigation shall be planned and supervised by an engineer or engineering geologist, according to the following:

- 1.) The number, location, and depth of the borings and test pits shall be determined using current prudent engineering practice for the size of the dam or embankment, quantity of material to be impounded, and subsurface conditions.
- 2.) The character of the overburden and bedrock, the proposed abutment sites, and any adverse geotechnical conditions which may affect the particular dam, embankment, or reservoir site shall be considered.
- 3.) All springs, seepage, and ground-water flow observed or anticipated during wet periods in the area of the proposed dam or embankment shall be identified on each plan.
- 4.) Consideration shall be given to the possibility of mudflows, rock-debris falls, or other landslides into the dam, embankment, or impounded material.

If the structure is 20 feet or higher or impounds more than 20 acre-feet, each plan of this section shall include a stability analysis of each structure. The stability analysis shall include, but not be limited to, strength parameters, pore pressures, and long-term seepage conditions. The plan shall also contain a description of each engineering design assumption and calculation with

a discussion of each alternative considered in selecting the specific design parameters and construction methods.

Analysis:

Sediment Control Measures

On 8/16/01 the mine encountered substantial underground water which had to be pumped to the surface. Pumping rates were in the 4,500 gpm range. While pumping was occurring, an underground event caused coal fines to be pumped to the surface and discharged into Eccles Creek. The sludge-laden discharge was believed to have begun about 3 am, but was not discovered until 9am on 8/28/01. Black sludge from coal dust was found on stream vegetation and on the stream bottom for about 3 miles below the discharge site.

In addition to the exceedance of UPDES permit limits, there was concern the coal fines could damage vegetation and the Macroinvertebrate populations in the stream. No dead or injured fish were found.

The NOV listed remedial action as: "1) Stop coal fines from entering Eccles Creek, immediately." This was done. "2) Submit a revised plan to be incorporated into the MRP which will prevent additional contributions of suspended solids outside the permit area. 3) Commit, in the MRP, to perform Macroinvertebrate studies of Eccles Creek semi-annually for three consecutive years starting in the year 2002, which will provide data that can be compared to prior data." Items 2 and 3 were to be done within 30 days of receipt of the NOV. This amendment is the required plan and commitment.

The amendment describes, "Instruments for monitoring suspended solids will be installed on all the mine discharge water lines. The instruments will be set below the discharge limit of 25 mg/l as established by the UPDES discharge permit." Further descriptions detail how, when the water exceeds the set limits, an automatic valve will engage to direct the water away from Eccles Creek and into a series of sand filters. Such sand filters are very effective in removing particulate matter and are even used to clean drinking water. The filtered water will then be discharged into Eccles Creek. The filters are cleared of particulate material using an automatic backwash and the material will be put into the coal stockpile.

Phone conversations with the Operator indicated previously-connected monitoring equipment had been disconnected which probably contributed to the event. The Operator is reminded and strongly encouraged to keep these, and all similar pollution control devices, fully connected and operational at all times.

The amendment also describes implementing a semi-annual Macroinvertebrate study just the same as described as required in the NOV remedial actions described above. Data resulting from the surveys will be included in Appendix A-3 which contains similar data from 1979 through 1983. There is a commitment that, "If impacts are found, the significance of the

OPERATION PLAN

impacts will be determined and appropriate mitigation if necessary will be performed.” All of the above appears to satisfy the NOV remedial actions and bring the MRP, and mine operations back into conformance with the regulatory requirements.

After the event, the mine Inspector took water samples to determine levels of coal fine contamination. Such testing is very difficult and the test results did NOT indicate the presence of coal fines. Every one of the 17 parameters that were looked for in the tests did not show up. The results for each of them was listed as “undetected” even though the test instruments have fairly low detection levels. This is consistent with visual observations that the coal fines had “flushed through” and were no longer present in the water itself. There were, however, observations by the Inspector and others of a black “bathtub ring” along the edges of the stream and on vegetation in the stream.

Findings:

The amendment meets minimum regulatory requirements.

RULES INDEX

30 CFR

773.17.....	3
774.13.....	3
784.14.....	3
784.16.....	3
784.29.....	3
817.41.....	3
817.42.....	3
817.43.....	3
817.45.....	3
817.49.....	3
817.56.....	3
817.57.....	3

R645-

300-140	3
300-141	3
300-142	3
300-143	3
300-144	3
300-145	3
300-146	3
300-147	3
300-148	3
301-512	3
301-514	3
301-521	3
301-531	3
301-532	3
301-533	3
301-536	3
301-542	3
301-720	3
301-731	3
301-732	3
301-733	3
301-742	3
301-743	3
301-750	3
301-761	3
301-764	3