Appendix 7-3

Probable Hydrologic Consequences Determination

Updated January 2006

Probable Hydrologic Consequences Determination

General

The best available data to assist in making a determination of probable hydrologic consequences of the proposed operation comes from the adjacent Horse Canyon Mine, and Columbia Mines. The Columbia Mine has been closed since the late 1960's, and the Horse Canyon Mine has been closed since the mid-1980's. The Horse Canyon Mine has also been reclaimed under SMCRA.

Data gathered from these mines and the surrounding hydrologic regime has been used in this determination, as well as baseline data gathered in the area of the proposed Lila Canyon Mine Extension.

Pertinent water monitoring data for the Horse Canyon Mine and Lila Canyon Extension is included in Appendices 7-1, 7-2, and 7-6 of this application and Appendix VII-1 of the Horse Canyon MRP. Additional recent monitoring data area available from the DOGM electronic database. Baseline geologic information is presented in Chapter 6 of this P.A.P. Baseline hydrologic information is presented in Sections 724.100 and 724.200 of this P.A.P.

Mining in the Horse Canyon area began in the late 1930's. Detailed hydrologic information was first gathered in the late 1970's. It is impossible to precisely describe the area's pre-mining hydrology. The conditions represented by these data help to define the hydrology about the time SMCRA was passed.

Analysis of Data

Potential impacts of coal mining on the quality and quantity of surface and groundwater flow may include:

- Contamination from acid- or toxic-forming materials;
- Increased sediment yield from disturbed areas;
- Increased total dissolved solids concentrations;
- Flooding or stream flow alteration;
- Impacts to groundwater or surface water availability;

- Hydrocarbon contamination from above ground storage tanks or from the use of hydrocarbons in the permit area;
- Contamination of surface and groundwater from road salting; and
- Contamination of surface water from coal spillage due to hauling operations.

Potential Impacts to the Hydrologic Balance. Potential impacts of the Lila Canyon Mine on the hydrologic balance of the permit and adjacent areas are addressed in the following sections:

Acid- or Toxic- Forming Materials. Information on acid-and toxic-forming materials is presented in Chapter 6. These data show that no acid- or toxic-forming materials are present at the Lila Canyon Mine.

Additionally, rocks of the Mesa Verde Group are carbonaceous, resulting in persistence of acids and related toxins in water in the mine and adjacent strata unlikely. Also, the design of the refuse pile will prevent any acid or toxic potential from material removed from the mine. Based upon the hydrology, geology, and climate of the area probability of acid or toxic impacts from materials removed from the mine or from mine water discharge is unlikely. Thus, no significant potential exists for the contamination of surface and groundwater in the permit and adjacent areas by acid- or toxic-forming materials.

Sediment Yield. The potential impact of mining and reclamation on sediment yield is an increase in sediment in the surface waters downstream from disturbed areas. Sediment-control measures (such as sedimentation ponds, diversions, etc.) will be installed to minimize this impact. These facilities will be regularly inspected (see Section 514) and maintained to ensure that they remain in proper operating condition.

The implementation of sediment control measures are mandated to minimize the erosion hazard associated with mining operations. Argument has been presented that reducing the sediment load, while the sediment carrying capacity of the stream remains the same, can result in increased stream bed and stream bank erosion. This would be true, if the flow rate released to the stream remained the same. However, the use of sediment control structures results in the peak flow released from the site to be reduced. Therefore, the sediment carrying capacity of the stream is correspondingly reduced. Additionally, the duration of the lower rate controlled release from the sediment control structures aids in enhancing the

development of vegetation along the stream banks aiding in the additional stabilization of the channel banks and bed. While these impacts are not anticipated, the applicant has agreed to monitor the conditions of the channel downstream of the site for geomorphic and erosional change as a result of mine discharges.

All construction and upgrading activities will be undertaken during periods of dry weather, commencing in late spring and lasting through fall. For both the mining and reclamation periods, it is expected that construction, upgrading, or regrading activities would cause an increase in sediment load to the stream. Temporary sediment controls will be used whenever possible to lessen the impact of construction activities.

Stream buffer zones have been delineated upstream and downstream of the disturbed area of the mine facilities. These buffer zones will aid in ensuring that no disturbance occurs within the area of the unprotected channel.

Subsidence tends to cause a warping or sagging of the surface in the area of the mined out area. Within the stream channel that crosses a subsided area, at the upstream boundary of the subsidence, the stream channel is steepened, resulting in the potential for additional erosion in the steepened reach. As the stream crosses the sagged subsided area, the channel gradient decreases below the pre-subsided slope. This results in increased glides and extended pools in intermittent and perennial streams or areas of increase deposition in ephemeral streams. Subsidence cracks which intersect stream channels with steep gradients could, for a short period of time, result in a local increase in the sediment yield of the stream. However, this sediment increase would also cause the crack to quickly fill, recreating pre-subsidence stream channel conditions. Thus, the potential impact to sediment yield from subsidence in the permit area would be minor and of short duration.

Various sediment-control measures will be implemented during reclamation as the vegetation becomes established. As discussed in Section 542.200 of this P.A.P., these measures will include installation of silt fences and straw-bale dikes in appropriate locations to minimize potential contributions of sediment to the Right Fork of Lila Canyon. These measures will reduce the amount of erosion from the reclaimed areas, thereby precluding adverse impacts to the environment.

Acidity, Total Suspended Solids, and Total Dissolved Solids. Probable impacts of mining and reclamation operations on the acidity and total suspended solids concentrations of surface and groundwater in the permit and adjacent areas were

addressed previously in this section. Since the proposed Lila Canyon Mine has not started, there is no specific data available on Lila mine water. Therefore, quality information was obtained from the adjacent Horse Canyon Mine workings.

Data presented in Appendices 7-1 and 7-6 and summarized in Section 724.100 of this P.A.P. indicate that the TDS concentration of water in the Blackhawk Formation (as measured in inflow to the nearby Horse Canyon Mine) ranged from approximately 1400 to 2400 mg/l and is of the sodium-bicarbonate type. As noted in Section 724.200, the TDS concentration of water in the Right Fork of Lila Canyon is unknown, but likely to be similar to the flows in Horse Canyon Creek which are in the range from 1200 to 1500 mg/l. The dominant ions in this water are calcium and bicarbonate during high-flow periods, whereas the dominant ions during low-flow periods are sodium, magnesium, sulfate, and bicarbonate.

These data suggest that the TDS concentration of water in the Right Fork of Lila Canyon can be expected to increase by a factor of 1.5 for the water discharged from the mine to the drainage. This concentration is similar to concentrations found in other streams along the Book Cliffs are described by Waddell, et. Al. (1986). It should be noted that it is anticipated that the Lila Canyon Mine will use powdered limestone or dolomite (i.e., calcium-magnesium-carbonate) for rock dust. It is not anticipated that gypsum rock dust (calcium-sulfate) will be used in the mine. Hence, dissolution of rock dust by water in the mine should not influence the chemical type of water in the drainage if mine water is discharged to the Right Fork of Lila Canyon.

As indicated in the P.A.P., the total iron and manganese concentrations in discharges from the mine are not significantly elevated to an effect downstream uses. Also, as discussed in Appendix 7-9, the mine water discharge is expected to affect only the 3.4 mile downstream from the mine.

Lila Canyon drainage, as part of the lower Price River basin, is classified according to Section R317-2-13 of the Utah Administrative Code (Standards of Quality for Waters of the State) as a class 2B (secondary contact recreation use), 3C (nongame fish and other aquatic life use), and 4 (agricultural use) water. No TDS standards exist for class 2B and 3C water. The TDS standard for class 4 water is 1,200 mg/l. Hence, if discharges occur from the Lila Canyon Mine to the Right Fork of Lila Canyon, the data indicate that the TDS concentration of these discharges will slightly exceed the agricultural use water-quality standard.

As there is limited agricultural use in the area, this TDS exceedance is not considered significant. The major usable water resources in the area that could potentially be affected are springs and ephemeral channels. These water sources

are used by wildlife and livestock. Most of these sources are locate upstream of the proposed discharge point. Therefore, there would be no impact to these existing sources. Additionally, the quality of water discharge from the mine is expected to be significantly better than the other waters which occurs from the Mancos Shale which downstream agriculture currently uses (TDS ranging from 2200 to 4800 mg/l).

Concerns have been raised that there might be impacts of increased salinity from the solution of salts from the Mancos Shale. While it is likely that a small increase in TDS from salts picked up from the Mancos Shale, this is not expected to be a significant problem. Appendix 7-9 includes a calculation of how far mine discharge of 500 gpm would be expected to flow. This flow rate is thought to be higher than the expected discharge amount, but it does provide a worse case estimate. Because of infiltration, evapotranspiration, and diversion runoff from the channel to which the mine discharges to a stock pond, the mine discharge is not expected to reach the Price River. Therefore, it is not expected that any salinity increase would affect downstream waters.

It should also be noted that the dissolved iron standard for class 3C water is 1.0 mg/l. No dissolved iron standard exists for class 2B or 4 waters. The data presented above indicate that potential discharge water from the mine will not exceed the dissolved iron standard of Lila Canyon. No standards exist in the R317 regulations for total iron, dissolved manganese, or total manganese. However, the data presented above indicate that potential discharges from the mine to the Right Fork of Lila Canyon will meet the effluent limitations of 40 CFR 434.

No hydrologic impacts have been noted at the adjacent Horse Canyon Mine due to subsidence. Although tension cracks may locally divert water into deeper formations, resulting in increased leaching of the formation and increased TDS concentrations, the potential of this occurring is considered minimal. This conclusion is based on experience at the Horse Canyon Mine and on the fact that the shale content of the North Horn Formation, the Price River Formation, and the Blackhawk Formation should cause these subsidence cracks to heal quickly where they are saturated by groundwater flow. Thus, potential impacts on TDS concentrations would be minor and not of significant concern.

Flooding or Streamflow Alteration. Runoff from all disturbed areas will flow through a sedimentation pond or other sediment-control device prior to discharge to the Right Fork of Lila Canyon. Three factors indicate that these sediment-control devices will minimize or preclude flooding impacts to downstream areas as a result of mining operations:

1. The sedimentation pond has been designed and will be constructed to be geotechnically stable. Thus, the potential is minimized for breaches of the sedimentation pond to occur that could cause downstream flooding.

2. The flow routing that occurs through the sedimentation pond and other sediment-control devices reduces peak flows from the disturbed areas. This precludes flooding impacts to downstream areas.

3. By retaining sediment on site in the sediment-control devices, the bottom elevations of the Right Fork of Lila Canyon downstream from the disturbed area will not be artificially raised. Thus, the hydraulic capacity of the stream channel will not be altered.

The volume of streamflow will increase in the Right Fork of Lila Canyon if water is discharged from the mine to the drainage. Potential impacts to the drainage channel could include the displacement of fines on the channel bottom, and minor widening of the channel. However, the degree of widening will likely be minimized by the increased vigor and quantity of vegetation which will be sustained along the stream channel by the increased availability of water. In particular, it is anticipated that a phreatophyte streambank vegetative community will develop as a result of mine-water discharges. This effect will occur for the distance downstream that surface flows can be sustained above channel transmission losses. Based on the maximum anticipated estimate of mine water discharge, it is unlikely that any flooding will occur to the downstream channel as the flow (1.1cfs) is significantly below the anticipated 2-year flood (37 cfs). Care will be taken during discharge of this water to avoid erosion at the discharge point or flooding of downstream areas. Once mining ceases, the mine will be sealed and no discharges will occur. The streamflow in the Right Fork of Lila Canyon will then return to pre-mining discharge levels.

Following reclamation, stream channels which have been altered by mining operations will be returned to a stable state (see Section 762.100). The reclamation channels have been designed to safely pass the peak flow resulting from the 10-year, 6-hour or the 100-year, 6-hour precipitation event as appropriate for the channel and in accordance with the R645 regulations. Thus, flooding in the reclaimed areas will be minimized. Interim sediment-control measures and maintenance of the reclaimed areas during the post-mining period will preclude deposition of significant amounts of sediment in downstream channels following reclamation, thus maintaining the hydraulic capacity of the channels and precluding adverse, off-site flooding impacts.

Subsidence tension cracks that appear on the surface will increase the secondary porosity of the formations overlying the Lila Canyon Mine. During the period prior to healing of these cracks, this increased percolation will decrease runoff during the high-flow season (when the water would have rapidly entered the stream channel rather than flowing into the groundwater system). During low-flow periods, the result of this increased percolation will be an increase in the base flow of the stream. Hence, the net result will be a decrease in the flooding potential of the affected stream.

An additional flooding issue is the potential for flooding of the mine following mining and the discharge of water from the portals. Since the regional geology and hydrologic regimes of the Horse Canyon and Lila Canyon Mines are so similar, data has been extrapolated from the Horse Canyon Mine to the proposed Lila Canyon Mine. The proposed Lila Canyon Mine portals are located up-dip from areas in the mine where water may be expected; therefore, the only mine water expected to reach the surface is that which is pumped. Mine water is not expected to reach the portal level or flow from the reclaimed portal level or flow from the reclaimed portals of either the reclaimed Horse Canyon Mine or the Lila Canyon Mine based on the following information:

1) Mine water level information gathered in 1986 and 1993 indicates that there has been little rise in the water level since mining activities ceased.

2) The Sunnyside Fault is not a large producer of water. As an example, the Columbia Mine located north of the Horse Canyon Mine also encountered the Sunnyside Fault zone and has been closed since the late 1960's. If water inflow rates were high, the mine workings would have flooded, developing a head differential between the Columbia Mine and the Horse Canyon Mine (pumped). If the fault zone were a good conductor of water, the inflow to the Horse Canyon Mine would have been high, driven by the head from the flooded Columbia Mine Workings. However this was not the case and the water levels have not flooded much beyond the water levels in the Horse Canyon Mine while it was pumped. Suggesting that there is no head to cause a flooding rise and that the Sunnyside Fault is not a significant conduit for water flow.

3) Sieler and Baskins (1986) showed that the water quality for natural waters generally drops significantly when exposed to

mine workings (gob, etc). The water quality of the mine water samples from the Horse Canyon Mine sump locations (2 Dip, Main Slope, 2E-B) as compared to the water quality of springs in the lower stratigraphic section of the Horse Canyon permit area show little difference in TDS. This indicates that majority of the water in the mine is not the result of inflow along the fault zone from the Columbia Mine. Suggesting that the fault zone is a poor conductor of water for the poorer quality water expected from the flooded Columbia Mine workings or that the Columbia Mine workings have not flooded much beyond the water levels in the Horse Canyon Mine while it was pumped.

4) The three Piezometers, IPA-1, 2 and 3 shown on Plate 7-1, suggest that the gradient is down dip away from the portal area. The Piezometer readings can be found in Appendix 7-1.

5) The coal mined at Horse Canyon (as well as that at Lila Canyon) is underlain by a marine sheet sandstone (Sunnyside, see Geology, Chapter VI). Lines (1985) did extensive petrographic work on porosity and permeability in the formation (see Table 1). If the water level in the mine were to ever approach the level of the portal, the Sunnyside marine sandstone would likely discharge water, preventing any head development behind the portal closures.

6) Much of the Horse Canyon Mine floor has been fractured by the effects of pillar removal, especially near the outcrop. Fracturing develops secondary porosity and enhances the permeability of the underlying Sunnyside marine sandstone. This would function as a means to dissipate any head which might otherwise develop on the portals. The proposed longwall mining in the Lila Canyon Mine is also expected to produce floor fracturing.

7) There is a difference in elevation of about 400 to 500 feet between the lowest portal and the approximate water level in the Horse Canyon mine (1986 and 1993). If the water level in the mine continues to rise, the head differential between the discharging aquifer and the mine will decrease. The

decrease in head will have the direct effect of decreasing the inflow rate into the mine. Additionally, the volume of water required to "fill the mine" would also have to fill the strata above the mine, which has been dewatered throughout the history of the mine.

Based on these factors it is unlikely that the groundwater level in the lower groundwater zone will ever rise to the level of the portal, at any portal location for either the Horse Canyon or Lila Canyon Mines. Hence, there should be no natural discharge of groundwater through any of the sealed portals. To verify this, stand pipes will be incorporated into the grading plans for the portals so that water levels can be checked annually.

Groundwater and Surface Water Availability. Potential impacts to the availability of surface and groundwater from the Lila Canyon Mine operations include both decreased and increased stream flows and spring discharges caused by mine-related subsidence, bedrock fracturing, and aquifer dewatering. These potential impacts are discussed below.

Potential for Decreased Spring and Stream Flows

To date, while surface subsidence has been identified as a result of coal mining in the nearby Horse Canyon Mine, no impact or disruption of spring and seep of stream flows have been identified. Bedrock fracturing routinely occurs, depending on the overburden thickness, in the rock units overlying mined coal seams. Given the limited number of springs and limited groundwater resources of the Castlegate Sandstone and Blackhawk Formations in the permit and adjacent areas, subsidence or fracturing would affect the hydrologic balance in the area only if zones of increased vertical hydraulic conductivity were created which extended through the Price River Formation into the North Horn-Flagstaff and Colton Formations.

When subsidence occurs as a result of mining, there are four zones that occur above the mined out area. As shown in Figure 1, the zones are: a caved zone that occurs in the 6 to 10 times the thickness of the coal seam, a fractured zone which occurs 10 to 30 times the thickness of the coal seam, and deformation zone which occurs 30 to 60 times the thickness of the coal seam, and finally, a soil zone which occurs on the ground surface. Damage to surface and groundwater resources generally occur in the caved and fractured zones. Little or no damage occurs in the deformed zone. With only localized effects felt in the soil zone. As discussed in Section 525.120, the strains for the rock in the

proposed mine area, as a result of mining, should limit subsidence deformation to those areas where the overburden is less than 630 feet.

Where surface disruption or cracks appear, the general mechanism is extension of the soil mantle. Natural processes will heal these crack over time. Runoff and snowmelt will wash sediments into the crack and fill any voids created. As this process progresses, the crack disappear and the surface runoff and snowmelt return to normal courses. In the Wasatch Plateau and Book Cliffs area, the clays in the area are expansive and tend to seal these cracks very rapidly. Sidel, et.al. (1996) found that minor surface changes in the area of Burnout Creek recovered within two years.

As indicated in Figure 7-4 of the PAP, the majority of the identified springs and seeps are located outside of the maximum limits of subsidence. Therefore, the potential impact is significantly reduced.

Several lines of evidence suggest that mining-related subsidence and bedrock fracturing have not resulted in decreased stream flows or groundwater discharge in the vicinity of the nearby Horse Canyon Mine. Although considerable seasonal and climatic variability are noted in the hydrographs of springs in the permit and adjacent areas, data for both Horse Canyon Creek and springs which overlie the Horse Canyon Mine workings do not show discharge declines which may be attributed to either subsidence or bedrock fracturing (see Appendices 7-1 and 7-6).

Active groundwater systems in the Colton, Flagstaff-North Horn, and Price River Formations are separated from the Blackhawk Formation by the Castlegate Sandstone. As discussed in Section 724.100, this formation contains no springs and is not considered to be a major groundwater resource. Past mining in the Horse Canyon Mine has not increased the rate of spring discharge from the Price River Formation, indicating that groundwater is not being diverted into this formation. The absence of increased saturation in the Price River Formation indicates that vertical zones of artificially-increased hydraulic conductivity or secondary porosity do not extend into the Price River Formation and from thence into the overlying active groundwater systems of the North Horn-Flagstaff Formations.

Data presented in Appendices 7-1 and 7-6 and summarized in Section 724.100 indicate that the low-permeability lower groundwater system, in the vicinity of mined coal seams, contains groundwater which is compartmentalized both vertically and horizontally. Coal mining locally dewaters isolated, overlying

saturated rock layers in the Blackhawk Formation but does not appear to draw significant additional recharge from overlying or underlying zones.

Additionally, the springs which supply most of the local flow discharge from the Flagstaff-North Horn or Colton Formations. These formations or aquifer are perched from the underlying lower groundwater zone and the intervening formations contains swelling clays which tend to heal small fractures. Also, since the perched aquifer materials are isolated and lenticular, there is a greater probability that fractures in one area will not drain all the different perched aquifers because they are not interconnected.

The very low permeability and vertical gradients in Blackhawk Formation rock layers underlying actively mined coal seams in the Horse Canyon Mine and the absence of significant discharge into the mine from these layers indicates that mining does not draw groundwater from the underling portions of the Blackhawk and Mancos Shale. Additionally, the distinctive solute composition of Mancos Shale groundwater has not been observed inside the Horse Canyon Mine indicating that the saturated zones in the Blackhawk and Mancos are separate.

From the above discussion, it appears that the Horse Canyon Mine has not decreased groundwater discharge in overlying or underlying groundwater systems. Hence, it is unlikely that coal mining will effect the discharges of any spring as a result of mining in the Lila Canyon permit and adjacent areas.

As discussed in Section 724.200, as a result of the five to six miles horizontal distance from proposed permit area to Range Creek (see Plate 7-1a) and the isolating effects of the over 1,000 feet of low-permeability, isolating strata between the coal seam and the creek elevation (see Plate 7-1B and Table above) and the limited potential and impact of subsidence damage to the recharge area, it is not likely that the Lila Canyon Mine will adversely effect Range Creek. Due to these conditions, no baseline or other sampling has been gathered nor is anticipated on Range Creek. For the above reasons Lila Canyon extension does not present any Probable Hydrologic Consequences to Range Creek.

The contamination, diminution, or interruption of any water resources would not likely occur within the mine permit or adjacent areas. Since surface water flows only a limited part of year and will be provided protection by use of sediment controls, the major usable water resources that could potentially be effected in the area would be springs that are currently in use by wildlife and livestock. Most of these springs are located upstream of the permit area or are in areas where subsidence resulting from post-1977 mining is not documented or expected. To

date no known depletion of flow and quality of surveyed springs in the Horse Canyon permit area exists, and none are expected in the Lila Canyon area, based on available data from the Horse Canyon Mine. Although pre-mining data is not available for Horse Canyon, depletion problems from subsidence are not known to have been filed and are not indicated by sampling results in Appendices 7-1 and 7-2. Therefore, it is unlikely an alternative water supply will be needed, although they have been identified in Section R645-301-727.

L-16-G and L-17-G are seeps being monitored in Stinky Spring Canyon. Bighorn sheep have been observed within the canyon but have never been observed drinking the water.

Flows from these springs are historically less than 0.5 gpm and show a general seasonal decrease throughout the season. These sites were not identified during baseline surveys and are believed to exist intermittently and are not always evident. The low flow rates and intermittent nature of these springs suggest that they are local in nature.

These springs are located within the Central Graben, which is a block that has been downdropped between 145 and 250 feet relative to the adjacent bedrock. They occur near the contact between the Mancos Shale and the overlying Blackhawk Formation. The fractured nature of the bedrock along the edges of the Central Graben, as a result of the faulting, likely are the limits of the areal extent of the recharge or source area to the springs. The low-permeability of the surrounding Mancos Shale likely isolate the graben block from groundwater in the surrounding bedrock. Thus, the recharge to the springs is likely limited to the area of the consolidated graben block.

As indicated previously, there is no evidence that mining in the Horse Canyon Mine had any influence on the underlying formations. Therefore it is likely that the Lila Canyon Mine would have similar affects. Due to the springs location and lateral separation from the mine, outside the permit area, outside the limit of subsidence, being separated from the mine block by faulting within the Central Graben, and being 500 to 600 feet below the coal seam, there is no potential for Lila Canyon Mine to negatively impact this spring or recharge sources.

Potential for Increased Stream Flows

If sufficient water is encountered in the Lila Canyon Mine workings to require discharge of that water to the surface, the flow of the Right fork of Lila Canyon will be increased. This flow would be ultimately to the Price and Green Rivers.

The impact of such discharge by the development of the Lila canyon extension would be quite limited.

The majority of water discharged from the mine would be water held in storage in the saturated zones above the coal seam. It is unlikely that any water below the coal seam would be affected or drained by the mine workings.

It is difficult to estimate the maximum potential discharge from the mine, however, DOGM has determined that a maximum discharge rate of 500 gpm should be used for design purposes. Based on this discharge, during the life of the operation the water extracted would be 22,600 ac-ft of water. This would be approximately 800 ac-ft per year. Discharge for the Price River at Woodside has a mean annual flow of 88,000 ac-ft/yr. Discharge for the Green River at Green River has a mean annual flow of 4,484,000 ac-ft/yr. Therefore the average discharge at 500 gpm from the mine would be 0.9% of the Price River flow volume and 0.02% of the Green River flow volume. Given the standard fluctuations in the stream flows, this small flow addition would have little effect on the streams.

It should be emphasized that the 500 gpm estimate is considered to be conservatively high. The adjacent Horse Canyon Mine had a maximum discharge of 90 gpm. While the Soldier Canyon Mine farther to the north in the Book Cliffs, the rate of water discharged was estimated to be 15,000,000 gallons per year (approximately 30 gpm).

If water does need to be discharged, it will be sampled and discharged in accordance with the approved UPDES Discharge Permit. If the quality parameters of the mine water do not meet UPDES standards, the water will be treated prior to discharge. Treatment may include holding/settling in the mine, pumping to retaining or sediment ponds, chemical treatment or other approved means to prevent non-compliant discharge.

Based on the results of the evaluation presented in Appendix 7-9, the discharge of this amount of water from the mine is not expected to have a significant impact on the downstream resources. Based on the results from Appendix 7-9, the mine discharge flow will be lost due to transmission losses and percolation within 3.4 miles from the discharge point. Therefore, the discharge will not reach the Price, Green, or Colorado Rivers. The discharge of the water will have a positive impact on the vegetation and wildlife of the area by providing a fairly constant supply of water along this limited reach of the channel.

Based on comparison of upstream and downstream data gathered on Horse Canyon Creek which incorporates the analysis from past mine discharges to the channel, water quality will not be drastically affected in the intermittent drainage in the event of discharge of mine water into the channel. The expected impacts to the channels of the Lila Canyon area are very likely to be similar to those at Horse Canyon due to the close proximity, and similarities of mining and drainage conditions.

Potential Hydrocarbon Contamination. Diesel fuel, oils, greases, and other hydrocarbon products will be stored and used at the site for a variety of purposes. Diesel and oil stored in above-ground tanks at the mine surface facilities may spill onto the ground during filling of the storage tank, leakage of the storage tank, or filling of vehicle tanks. Similarly, greases and other oils may be spilled during use in surface and underground operations.

The probable future extent of the contamination caused by diesel and oil spillage is expected to be small for three reasons. First, because the tanks will be located above ground, leakage from the tanks will be readily detected and repaired. Second, spillage during filling of the storage or vehicle tanks will be minimized to avoid loss of an economically valuable product. Finally, the Spill Prevention Control and Countermeasure Plan which will be developed for the site will provide inspection, training, and operation measures to minimize the extent of contamination resulting from the use of hydrocarbons at the site. This plan is not required to be submitted. However, a copy will be maintained at the mine site as required by the Utah Division of Water Quality.

Road Salting. No salting of roads will occur within the permit area. Hence, this impact is not a significant concern.

Coal Haulage. Coal will be hauled over the county road from the mine portal area to Utah Highway 6 and thence to its ultimate destination. In the event of an accident which causes coal to spill from the trucks, residual coal following cleanup of the spill may wash into local streams during a runoff event. Possible impacts to the surface water are increased total suspended solids concentrations and turbidity from the fine coal particulates. The probability of a spill occurring in an area sufficiently close to a stream channel to introduce coal to the stream bed is considered small.

In addition to spills, wind may carry coal dust or small pieces of coal from the open top of the coal trucks into drainages near the roads. The impact from

fugitive coal dust is considered to be insignificant due to the small amounts lost during haulage in the permit and adjacent areas.

Water Consumption. The USFWS have identified that water consumption by underground coal mining operations could jeopardize the continued existence of and/or adversely modify the critical habitat of the Colorado River endangered fish species: Colorado pikeminnow, humpback chub, bonytailed chub, and razor back sucker. The USFWS has determined that water consumption by underground operations could potentially have adverse effects on the Colorado River basin. The USFWS considers consumption to include: evaporation from ventilation, coal preparation, sediment pond evaporation, subsidence on springs, alluvial aquifer abstractions into mines, postmining inflow to workings, coal moisture loss, and direct diversions. These consumption process are discussed below.

Bath House/Office
It has been estimated that the Bath House/Office will consume approximately 35 gallon per day per person for shower and human consumption. This estimate results in a usage of 1,260,000 gal/yr or 3.86 ac.ft.yr.

Evaporation from Ventilation - evaporation rates have been estimated at 2.5 gallons per million cubic feet of ventilated air. This number is dependent on temperature and relative humidity. It is estimated that with the projected usage of 473,040 million cf/yr of air and a loss of 2.5 gallons per million c.f. Therefore, the water consumption for evaporation would be approximately 1,183,600 gallons per year or 3.63 acre feet of water.

Coal Preparation - The operator does not anticipate any coal preparation that would result in water usage.

Sediment Pond Evaporation - The sediment pond is used to hold rain and snow runoff that flows over disturbed areas of the coal mining and reclamation operations until accumulated sediment has dropped out. At that point the water is discharged into a receiving stream. The holding time for this water is planned to be short, therefore, no significant evaporation loss is expected. This would not be considered a consumption mechanism.

Subsidence on Springs - As shown in Appendix 7-8 and discussed in Section 525.120 of the application, the majority of springs cannot be adversely effected by subsidence because of their physical location (off the permit area and outside the area of potential subsidence) or for those within the permit area because of the amount of cover, 1000 feet or more, which as discussed in Section 525.120

are not expected to experience any significant deformation for covers over 450 feet. In the adjacent Horse Canyon mine, which was mined for over 45 years, there have been no reported effects on springs due to subsidence.

Alluvial Aquifer Abstractions into Mines - There will be no water infiltrations from alluvial systems into the mine.

Postmining Inflow to Workings - Postmining all openings will be sealed and backfilled. The proposed mine openings for Lila Canyon are at an elevation where no surface inflow is possible. This coupled with the sealing plan for the portals makes postmining inflows virtually impossible.

Coal Moisture Loss - It has been estimated that coal moisture loss or usage to be estimated at 4.5 gallons per ton of coal mined (see Table 2). Using the estimated usage for mining with an estimated production of 4.5 Million tons per year a usage of 20,250,000 gal per year or 62.12 acre feet can be estimated. It should be noted that due to the extremely low hydraulic conductivity rates measured in the general area, that groundwater movement is very slow. Using the average hydraulic conductivity measured for Blackhawk Sandstone (3.0×10^{-6} cm/sec) (see Table 1) which is equal to .1 inch per day. Therefore, water encountered underground would take approximately 1,736 years to travel one mile. This water is considered relatively immobile. The water encountered and used underground would not reach the Colorado Drainage in any reasonable time, if ever, and thus water consumed underground cannot negatively effect the Colorado River Basin.

Surface Dust Suppression It has been estimated that usage on the surface for dust suppression will be approximately 10,000 gallon per day or 3,650,000 gallons per year. This results in a usage of 11.20 acre feet per year.

Direct Diversions - no consumption.

Adding the four losses due to mining equals to 80.81 acre feet which is below the mitigation level of 100 acre feet. UEI does hold 362.76 acre feet of underground water rights to offset any consumption. Therefore, it is the opinion of UtahAmerican Energy, Inc. that water consumption by underground coal mining operation will NOT jeopardize the existence of or adversely modify the critical habitat of the Colorado River endangered fish species.

Conclusion

Based on available data and expected mining conditions, the proposed mining and reclamation activity is not expected to proximately result in contamination, diminution or interruption of an underground or surface source of water within the proposed permit or adjacent areas which is used for domestic, agricultural, industrial, wildlife or other legitimate purpose.

It should be noted that the determination of no known depletion of flow or quality is based on available data, which is primarily post-mining.

Table 2 Projected Water Usage (Quantitative Water Consumption Impact Assessment)	
1- Bath House/Office a. 150 @ 35 gpd/ea. = 5250 x 240	1,260,000 gal./yr.
2- Mining(Coal moisture loss) a. 2 Sections (1) 4.5 M Ton @ 4.5 gal./ton	20,250,000 gal./yr.
3- Fan (Evaporation from ventilation) a. Evaporation (1) 900,000 cfm @ 473,040 M cf/yr. (2) 2.5 gal./M c.f.	1,183,600gal./yr.
4. Surface Dust Suppression 10,000 gallon per day	3,650,000 gal/yr.
Total Usage	26,343,600 gal./yr. (80.81 ac.ft./yr.)

References

Croley, Thomas W. III, 1977. Hydrologic and hydraulic computations on small programmable calculators, Iowa Institute of Hydraulic Research, Univ. of Iowa, Iowa City, Iowa.

Goldman, et.al., 1986. Erosion and Sediment Control Handbook, McGraw-Hill Book Company, N.Y.

Intermittent Power Agency, Horse Canyon Mining and Reclamation Plan, Carbon County, Utah, ACT/007/013.

JBR Consultants Group, 1986. Field notes and maps for the spring and seep survey of the Horse Canyon area, Fall, 1985.

Kaiser Coal Corporation, 1985. Mining and Reclamation Plan for the South Lease. Submitted to DOGM.

Kaiser Coal Corporation, 1986. Mining and Reclamation Plan for the Sunnyside Mines. Submitted to DOGM.

Lines, G. C., 1985. The groundwater system and possible effects of underground coal mining in the Trail Mountain area, central Utah. U.S. Geological Survey Water-Supply Paper 2259, 32 p.

Lines, G. C. and others, 1984. Hydrology of Area 56, Northern Great Plains and Rocky Mountain coal provinces, Utah: U.S. Geological Survey Water-Resources Investigations Open-File Report 83-38, 69 p.

Lines, G. C. and Plantz, G. G., 1981. Hydrologic monitoring in the coal fields of central Utah, August 1978- September 1979: U.S. Geological Water-Resources Investigations Open-File Report 81-138, 56 p.

Sidle, R.C., I. Kamil, A. Sharma, and S. Yamashita. 1996. Stream Response to Subsidence from Underground Coal Mining in Central Utah. U.S. Forest Service. Manti-La Sal National Forest/ Rocky Mountain Experiment Station.

United States Department of Agriculture Soil conservation Service. National Engineering Handbook Section 4 - Hydrology, 1985.

Unites States Department of Agriculture Soil Conservation Service. Computer program for the project formulation - hydrology, technical release number 20, 1982.

U.S. Steel, 1981. Mining and Reclamation Plan for the Geneva Mine. Submitted to DOGM.

U.S. Steel, 1983. Response to Determination of Completeness Review. Submitted to DOGM.

Waddell, K. M., Dodge, J. E., Darby, D. W., and Theobald, S. M., 1986. Hydrology of the Price River Basin, Utah, with emphasis on selected coal-field areas: U.S. Geological Survey Water-Supply Paper 2246, 51 p.

App 7-3

Table 1

HYDRAULIC PROPERTIES of STRATA in the WASATCH and BOOK CLIFFS COAL FIELDS, UTAH

SOURCE		FORMATION			
		Price River	Castlegate	Blackhawk	Star Point
Soldier Cyn Mine	SC-11G			$2x10^{-7}$ cm/sec*	
	SC-12G			$1.5x10^{-3}$ cm/sec	
	SC-13G			10^{-6} cm/sec	
USGS (Waddell, 1986)	G95.5	$7.5x10^{-4}$ cm^2/sec**			
	G93.5		$2.1x10^{-4}$ cm^2/sec		
	G100.4		$3.2x10^{-5}$ cm^2/sec		
USGS (Lines, 1985)	(D-17-6) 27bda-1 Horizontal			$5.3x10^{-6}$ cm/sec (ss)	
				$3.3x10^{-11}$ cm/sec(silt)	
				$3.9x10^{-6}$ cm/sec (ss)	
				$3.9x10^{-12}$ cm/sec(shale)	
				$7.0x10^{-11}$ cm/sec(silt)	
					$1.1x10^{-5}$ cm/sec(ss)
					$5.3x10^{-6}$ cm/sec(ss)
	(D-17-6) 27bda-1 Vertical			$1.3x10^{-6}$ cm/sec (ss)	
				$4.2x10^{-11}$ cm/sec(silt)	
				$1.4x10^{-6}$ cm/sec (ss)	
				not measured	
				$7.8x10^{-10}$ cm/sec(silt)	
					$3.9x10^{-6}$ cm/sec(ss)
					$2.3x10^{-6}$ cm/sec(ss)

* cm/sec = hydraulic conductivity

** cm^2/sec = transmissivity

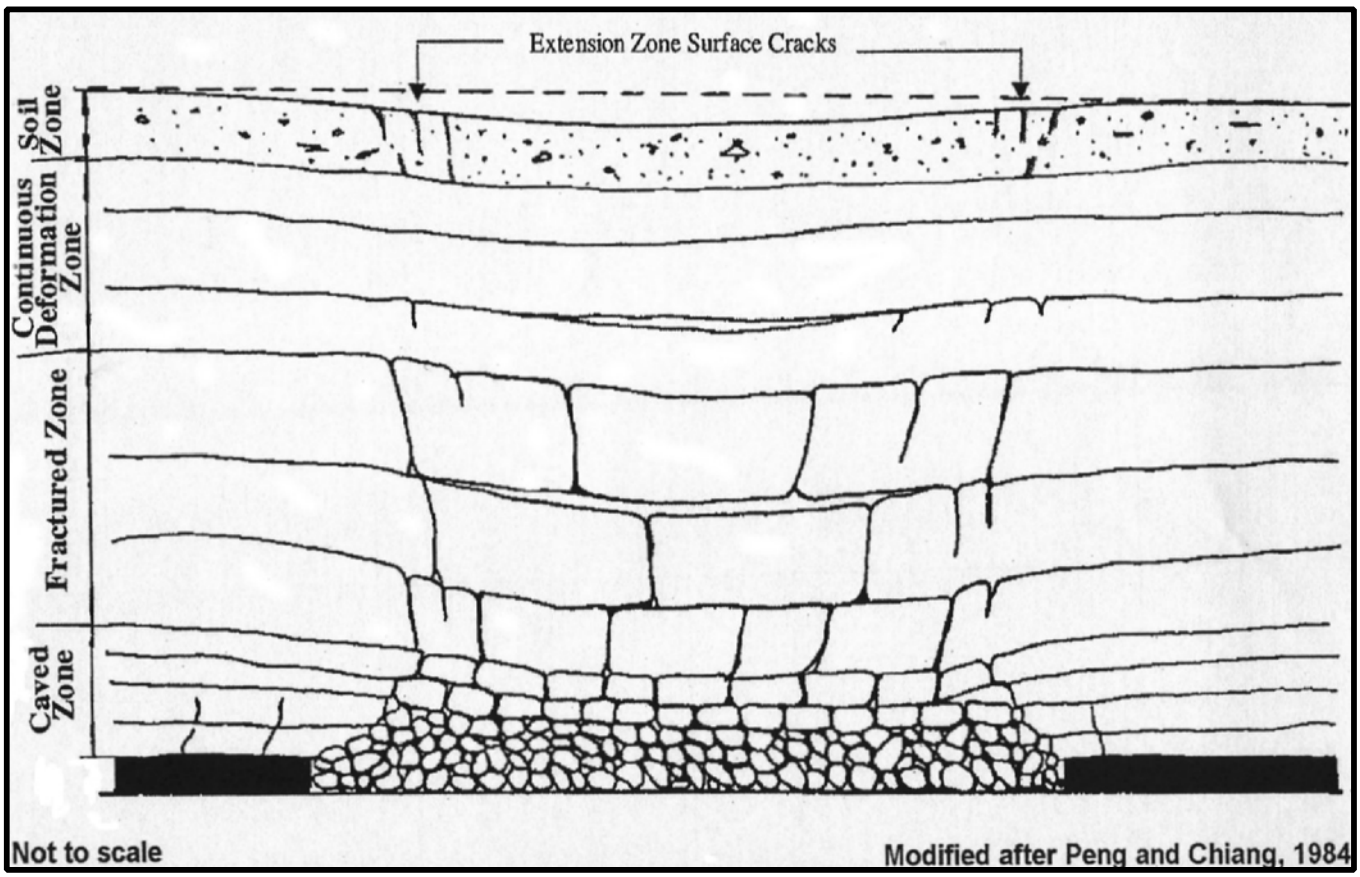

0' NTS

FIGURE 1. SUBSIDENCE PROFILE