

Canyon Fuel Company, LLC
Dugout Canyon Mine

Methane Degassification Amendment
July 13, 2006 ~~March 16, 2006~~

CHAPTER 2
SOILS

FILE IN: Expandable 07142006
Refer to Record No. 0057
in CO070039 . 2006 . INCOMING
for additional information

G-10	18
G-11	12
G-12	15
G-13	14 - 16
G-14A	14 - 16
G-15	14
G-16	14
G-17	12

* Wells G-1 and G-8 were never constructed.

Compaction - Prior to the application of topsoil, compacted subsoils will be roughened or loosened for a depth of 18 to 24 inches. To prevent compaction of topsoil, soil moving equipment will refrain from unnecessary operation over spread topsoil. The topsoil will be in a loosened condition prior to seeding.

Following the drying of the mud pit materials, the dirt excavated to create the mud pit will be mixed with the drill cutting and returned to the pit to prevent a boundary of hard material from forming in the mud pit area that would hamper root penetration and then compacted to minimize settling.

Erosion - Care will be exercised to ensure the stability of topsoil on graded slopes to guard against erosion during and after topsoil application. Post reclamation (contemporaneous and final) erosion control measures will be surface roughing, mulching and seeding.

242.200 Regrading

The areas will be graded to their approximate original topographic configuration, except as requested by the land owners and approved by the Division. ~~Well sites G-11 and G-12 will not be return to approximate original contour, refer to RA Attachment 5-3.~~

~~David Thayne representing the "Milton and Ardith Thayne Trust" has requesting that well sites G-11 and G-12 remain as constructed. Once the operator has finished using the sites, the mud pits will be filled, the area leveled, topsoil will be distributed, and native grasses planted.~~

~~Refer to Chapter 5 of this amendment for additional detail.~~

242.300 Topsoil Redistribution on Impoundments and Roads

The mud pits will be dismantled and filled following completion of drilling. See Section 242.100, Compaction for additional information. Mud pits will be covered with the same amount of topsoil as the rest of the site. The roads existing prior to starting the drilling program will not be reclaimed. Access roads built to allow entrance to the drilling pads will be reclaimed and will receive topsoil in the same depth as their corresponding pad areas .

243 Soil Nutrients and Amendments

The soils will be analyzed directly following salvage to determine if amendments are needed. Testing of the topsoil will be done according to Table 6 of the Division's Topsoil and Overburden Guidelines. The topsoil will be tested at a minimum for the following parameters: pH, electrical conductivity, total carbon, SAR, water holding capacity, plant available nitrogen, and phosphorus. Results of these analyses will be incorporated into Attachment 2-2.

244 Soil Stabilization

244.100 Protection and Stabilization of Surface Area

All reclaimed areas will be stabilized to control erosion by application of mulch, tackifier, and roughening of the surface. The areas will be graded to the approximately original topographic configuration. Seeding will be accomplished with the application of seeds and mulch with a long fiber tackifier or broadcast. Methods of protection and stabilization are further discussed in Chapter 3, Section 341.

Canyon Fuel Company, LLC
Dugout Canyon Mine

Methane Degassification Amendment
July 13, 2006 ~~March 16, 2006~~

CHAPTER 3
BIOLOGY

TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
310 INTRODUCTION	3-1
311 Vegetative, Fish and Wildlife Resources	3-1
312 Potential Impacts to Vegetative, Fish and Wildlife Resources	3-1
313 Description of Reclamation Plan	3-1
320 ENVIRONMENTAL DESCRIPTION	3-1
321 Vegetation Information	3-1
321.100 Plant Communities Within the Proposed Permit Area	3-2
321.200 Land Productivity Prior to Mining	3-2
322 Fish and Wildlife Information	3-3
322.100 Level of Detail	3-3
322.200 Site-Specific Resource Information	3-3
322.300 Fish and Wildlife Service Review	3-6
323 Maps and Aerial Photographs	3-6
323.100 Location and Boundary of Proposed Reference Area	3-6
323.200 Elevation and Locations of Monitoring Stations	3-7
323.300 Facilities for Protection and Enhancement	3-7
323.400 Vegetation Type and Plant Communities	3-7
330 OPERATION PLAN	3-7
331 Measures Taken to Disturb the Smallest Area	3-7
332 Description of Anticipated Impacts of Subsidence	3-7
333 Plan to Minimize Disturbances and Adverse Impacts	3-8
333.100 Minimize Disturbance to Endangered or Threatened Species	3-8
333.200 Species and Habitats	3-8
333.300 Protective Measures	3-9

TABLE OF CONTENTS (Continued)

<u>Section</u>	<u>Page</u>
340 RECLAMATION PLAN	3-9
341 Revegetation	3-9
341.100 Schedule and Timetable	3-10
341.200 Descriptions	3-10
341.300 Greenhouse Studies, Field Trials or Other Equivalent Studies	3-10
342 Fish and Wildlife	3-11
342.100 Enhancement Measures	3-11
342.200 Plants Used for Wildlife Habitat	3-11
342.300 Cropland	3-11
342.400 Residential, Public Service, and Industrial Land Use	3-11
350 PERFORMANCE STANDARDS	3-12
351 General Requirements	3-12
352 Contemporaneous Reclamation	3-12
353 Revegetation: General Requirements	3-12
353.100 Vegetative Cover	3-12
353.200 Reestablished Plant Species	3-13
353.300 Vegetative Exception	3-14
353.400 Cropland	3-14
354 Revegetative: Timing	3-15
355 Revegetation: Mulching and Other Soil Stabilizing Practices	3-15
356 Revegetation: Standards for Success	3-15
356.100 Success of Revegetation	3-15
356.200 Standards for Success	3-16
356.300 Siltation Structures	3-16
356.400 Removal of Siltation Structures	3-17

TABLE OF CONTENTS (Continued)

<u>Section</u>	<u>Page</u>
357 Revegetation: Extended Responsibility Period	3-17
357.100 Extended Period Begins	3-17
357.200 Vegetation Parameters	3-17
357.300 Husbandry Practices	3-17
358 Protection of Fish, Wildlife, and Related Environmental Values	3-17
358.100 Existence of Endangered or Threatened Species	3-18
358.200 Bald and Golden Eagles	3-18
358.300 Taking of Endangered or Threatened Species	3-18
358.400 Replacement of Wetland or Riparian Vegetation	3-18
358.500 Manmade Wildlife Protection Measures	3-18

LIST OF FIGURES

Figure 3-1 Vegetation Reference Areas	3-19
Figure 3-2 Adjacent Vegetation	3-20

LIST OF TABLES

Table 3-1 Productivity and Percent Over Story	3-2
Table 3-2 Reclamation Seed Mix	3-14

LIST OF ATTACHMENTS

Attachment 3-1	Vegetation Inventory
Attachment 3-2	Threatened, Endangered, and Sensitive Species Information
Attachment 3-3	Information Moved to Confidential Folder in 2005

310 INTRODUCTION

This chapter presents a description of the biological resources found on the Dugout Canyon degas well site areas.

311 Vegetative, Fish and Wildlife Resources

Vegetative, fish, and wildlife resource conditions in and adjacent to the proposed degassification wells are discussed in Section 320 of this submittal and the approved M&RP.

312 Potential Impacts to Vegetative, Fish, and Wildlife Resources

Potential impacts to vegetative, fish, and wildlife resources and the associated mitigation plan is presented in Sections 330 and 340 of this chapter.

313 Description of Reclamation Plan

The reclamation plan used to restore the vegetative, fish, and wildlife resources to a condition suitable for the post mining land use is presented in Section 340.

320 ENVIRONMENTAL DESCRIPTION

321 Vegetation Information

This section and the approved M&RP contain the environmental descriptions of the vegetation for the permit and adjacent areas.

321.100 Plant Communities Within the Proposed Permit Area

During June 2003, the degassification well sites were surveyed by Patrick Collins, Mt. Nebo Scientific. The report and survey for the areas are included in Attachment 3-1. The site for G-6 was moved to a pre-disturbed exploration well pad, the plant communities described in Mr. Collins report reflect the undisturbed portions on the north and south edges of the well pad. Vegetation information for G-7 was obtained from a report prepared by the NRCS Range Management Specialist, Dean Stacy (refer to Attachment 2-1 and 3-1) and the Patrick Collins survey prepared for well site G-3. A photograph of the G-7 site is included in Attachment 3-1. Well site G-3 and the access road can be seen on the photograph.

A vegetation survey of well sites G-8 thru G-12 was completed in July 2005 by Patrick Collins, Mt. Nebo Scientific. These sites have all been pre-disturbed, with a road running through the center of G-8 and remnants of logging activity at both G-9 and G-10. Approximately fifty percent of the well pads at sites G-11 and G-12 are existing roads which have no topsoil or vegetation. The remaining area at site G-11 has been disturbed, except for a small portion on the west side of the site. Well site G-12 has evidence of disturbance above the road cut however both soil and vegetation are intact. The reports and surveys for the areas will be included in Attachment 3-1.

The vegetation survey of well sites G-13 thru G-17 were completed between July and September 2005. The reports and surveys for the areas are included in Attachment 3-1. At well site G-13, the surface ranges from relatively smooth and non-stoney to very stoney. Portions along the southeast edge are too stony for soil salvage. The G-14 well site has been disturbed by logging. The road to G-13 and G-14 are existing roads, however, the soil will be bladed to the side of the road at site G-14 and replaced during reclamation.

Well site G-15 is about 50 percent disturbed by a road, slopecut and fill. The undisturbed portion of the site is a slope with a southeast aspect (35 to 45 percent gradient). Well site G-16 was previously the site of an exploration hole, having been disturbed and reclaimed. The topsoil on

the access road to G-16 will be bladed to one side of the road and replaced during reclamation. At well site G-17 approximately one-third of the site is an existing road.

321.200 Land Productivity Prior to Mining

Productivity of the well site lands prior to mining are shown in Table 3-1. Refer to Appendix 3-1 for a copy of the NRCS letter pertaining to productivity.

TABLE 3-1
Land Productivity

Well No.	Productivity (lbs.) Per Acre
G-1 (Previously Disturbed)	100
G-2	1,500*
G-3	1,500*
G-4 (Previously Disturbed)	150
G-5	1500*
G-6 (Majority Previously Disturbed)	300*
G-7	1200*
G-8 (Previously Disturbed)	1200
G-9 (Previously Disturbed)	1000*
G-10 (Previously Disturbed)	1000*
G-11 (Previously Disturbed)	1000*
G-12 (Previously Disturbed)	1000*
G-13	1000*
G-14 (Previously Disturbed)	1000*

G-15 (Previously Disturbed)	1000*
G-16 (Previously Disturbed)	1000*
G-17 (Previously Disturbed)	1000*
Reference Areas	
Sagebrush/Snowberry/Grass (G-2, G-3, G-4, G-5, and G-7)	1,500*
Aspen/Maple/Douglas Fir (G-1, G-6, and G-8)	300*
Mountain Brush/Conifer (G-9 thru G-11)	1200
Conifer/Mountain Brush/Pinyon Juniper (G-12, G-13 and G-15)	1100
Aspen/Conifer (G-14)	300
Mountain Brush/Snowberry (G-16 & G-17)	1400

* Community composition is experiencing a declining trend, with decrease in herbaceous production, increase in shrub/tree production.

322 Fish and Wildlife Information

Fish and wildlife information associated with the degas wells is provided in this chapter. A summary of the fish and wildlife resource information for the permit and adjacent areas is contained in Sections 322.100 through 322.200 of the approved M&RP.

322.100 Level of Detail

The scope and level of detail within the "Methane Degassification Amendment" are sufficient to design the protection and enhancement plan for wildlife and fish associated with the degas wells. Additional information pertaining to fish and wildlife in the permit area is located in the M&RP.

322.200 Site-Specific Resource Information

Raptors - An aerial raptor nest survey was done of the area by the Utah Division of Wildlife Resource (DWR, Chris Colt, Leroy Mead) and CFC personnel in May of 2003, refer to the Confidential Folder. Surveys were completed in May of 2004 and 2005, the information has been incorporated into the Confidential Folder.

No raptor nests were recorded during the survey (2003) in the area (portions of N1/2SE1/4NW1/4 and N1/2SW1/4NE1/4 of Section 24; a portions of N1/2SW1/4NW1/4 Section 19, Township 13 South, Range 13 East) of the degas wells. Refer to Figure 1-1 for mapped well locations.

During the 2004 raptor survey, there were no active or tended nests identified in the vicinity of the degas wells. During the 2005 raptor survey (May 12 & 20), there were no active or tended nests identified in the vicinity of degas wells G-9 and G-10. Two golden eagles nests were observed in the cliffs adjacent to degas well G-8 (Nest 9, DWR 2005 Raptor Survey). A single young eagle was observed, but habitually vacates the nest within 45 days of birth. A raptor survey will be conducted of the well site areas, each year that the wells are in operation.

A raptor survey was performed by Division of Wildlife Resources personnel in May 2006, a copy of the written log is included with deficiencies for Task ID #2456 (located in the confidential folder). Nest 424 when inventoried during the 1998 annual raptor survey was determined to be an inactive raven nest and was not found or inventoried again until 2004 when it was listed as inactive. Nest 424 was not inventoried or found during the annual raptor surveys in 2005 and 2006 by the Division of Wildlife Resources.

During a ground-truthing by Leroy Mead of the Division of Wildlife Resources on July 11, 2006, the two well sites with potential habitat for NSO and northern goshawks were G-14 and G-17. A calling survey will be performed if drilling at either of these sites will begin prior to the end of the exclusionary period, described as July 15.

Well G-14 will be drilled in 2006 after July 15. Well G-17 is to be drilled in 2007, the date for drilling will be scheduled in 2007 according to the availability of drilling companies and a calling survey if needed will be performed at that time. If a calling survey is performed, the results will be incorporated into the confidential folder.

A Northern Goshawk calling survey was performed in July of 2003 for four weeks in the area of well site G-17. According to the survey there was no response from a northern goshawk. A copy of this survey is located in the confidential binder.

On July 12, 2006, Nest 9 a golden eagle nest was inventoried on the ground by Leroy Mead, although there is evidence of disturbance associated with subsidence in the area, the nest was not disturbed. The 2006 raptor survey lists Nest 9 as being tended.

Bats - No known open mine shafts, caves, adits or other man made structures that might provide habitats for bats are known to exist in the degas project area. The sites are open and the lack of a food source would force the bats to seek habitat and nourishment elsewhere.

Mexican Spotted Owl - In the Summer of 2003, a calling point survey was conducted in the degas well area by EIS Environmental and Engineering Consulting. The survey report concluded that "within the project area, a thorough search did not reveal the presence of any Mexican spotted owls". The report is included in Attachment 3-2. A second survey was completed in May of 2004, the information is incorporated into Appendix 3-3 of the M&RP .

Threatened and Endangered Plant and Wildlife Species - There are no known federally or state listed threatened and endangered plant and wildlife species within the sites planned for degassification wells.

Bureau of Land Management Environmental Assessment No. UT-070-2001-83 and UT-070-2004-49 contain determination in accordance with the United States Fish and Wildlife Service's protocols, for sites G-11, G-15, G-16 and G-17. The sites were inventoried for the presence of threatened, endangered, and sensitive faunal, and floral species in June of 2001, April, May and June of 2004, no species were found. In the assessment the sites were being used for exploration holes and were referenced by a different number which is in parenthesis following the degas well number G-11 (DT-2), G-15(DUG0204), G-16 (E) and G-17 (DUG0304).

There are no known groundwater or surface water flows to the Colorado or Green Rivers with potential for impact by the drilling of the degas wells. Potential adverse affects to the four Colorado River endangered fish species (refer to table below) would not be likely since there is no direct route to the Colorado River or Green River from the proposed well locations. Per the Windy Gap Process (referenced by personal communication Jerriann Ernstsens, 8/19/03) consumption estimates for the degas wells: evaporation from ventilation - zero, drill holes will not intersect the coal seam being mined, therefore no access to mine ventilation until after area is sealed; coal preparation - zero, no coal preparation at degas sites (see Sections 522 and 523) ; sediment pond evaporation - zero, no sediment pond at degas sites (see Section 732.200); subsidence effects on springs - zero, no anticipated subsidence at degas sites (see Section525); alluvial aquifer abstractions into mines - zero, no alluvial aquifer abstractions associated with degas drill holes (see Sections 513.500 and 600); postmining inflow to workings - zero, no workings for postmining inflow associated with degas wells (see Sections 513.500 and 600); coal moisture loss - zero, no coal therefore no moisture loss (see Sections 522 and 523); direct diversion - zero, no direct diversions associated with degas wells (see Sections 522 and 523). Water **purchased** for drilling is estimated at 420,000 gallons per hole. Mitigation will not be required since the estimated loss for the construction and reclamation of the degas holes is zero acre feet per year.

Windy Gap Process as it Applies to Existing Coal Mines in the Upper Colorado River Basin

Per meetings with Division of Water Quality personnel during application for a UPDES permit in 2004, "there is no data supporting the premise that surface waters associated with the area of the mine operations reached the Price River or Colorado River prior to or since mining disturbance".

Mining Consumption:

Culinary Water is purchased from PRWID and hauled by D & D Trucking to the Mine.

Estimated **Purchased** Gallons/yr: 2,522,160

Ventilation Consumption/Evaporation:

87,108 gallons/day

$87,108 \times 0.5 = 43,554$ gallons/day (average)

$43,554 \times 365 = 15,897,210$ gallons/yr

Coal Producing Consumption/Coal Moisture Loss:

Water added to coal produced - 3.97% inherent moisture - source Dugout Geologist
6.38% run-of-mine moisture - year to date average
2.41% moisture added to coal by cutting operation

Projected Tonnage 2005 4,525,093 tons

Projected Tonnage 6 year average 4,894,100 tons

Tons water/yr 117,977

Pounds water/yr 235,954,986

Gallons water/yr 28,258,082

Sediment Pond Evaporation:

Mine Site Pond 0.107 acres (surface area)
18.1 in/yr (high estimate based on HCl Technical Memo, August 22, 2002)
0.16 ac/ft
7030 gallons/yr

Refuse Pile Pond 0.41 acres (surface area)
9 in/yr
0.31 ac/ft
5612 gallons/yr (high estimate)

Spring and Seeps Effects From Subsidence - Not Applicable

Alluvial Aquifer Abstractions into Mines - Not Applicable

Alluvial Well Pumpage - Not Applicable

Deep Aquifer Pumpage - Not Applicable

Postmining Inflow to Workings - Not Applicable

Direct Diversions: - Not Applicable

Dust Suppression - 1,000 gallons per truck load, 3 load per day, for 335 days = 1,005,000 gallons plus 1,000 per truck load, 1 load per day, for 193 days = 193,000. Total: 1,198,000 gallons per year.

Mine Discharge: 6 Month Average 420,537gpd = 155,260,050 gal/yr

Calculation estimates for water use in 2005 were necessary since we are using 2005 purchases and usage and the year is 2 months short.

**Federal and State Listed, Threatened, Endangered and Candidate Species
Plants and Wildlife
Carbon County, Utah
October 2002, Updated 6/7/05**

Common Name	Scientific Name	Status	Habitat Present*
Plants			
Uinta Basin Hookless Cactus	<i>Sclerocactus glaucus</i>	T	No habitat available
Graham Beardtongue	<i>Penstemon grahamii</i>	C	No habitat available
Fish			
Humpback Chub	<i>Gila cypha</i>	E	No habitat available
Roundtail Chub**	<i>Gila robusta</i>	T	No habitat available
Bonytail	<i>Gila elegans</i>	E	No habitat available
Colorado Pikeminnow	<i>Ptychocheilus lucius</i>	E	No habitat available
Razorback Sucker	<i>Xyrauchen texanus</i>	E	No habitat available
Birds			
Bald Eagle	<i>Haliaeetus leucocephalus</i>	T	No habitat available
See Confidential Folder			
Yellow-billed Cuckoo	<i>Coccyzus americanus</i>	C	No habitat available
Ferruginous Hawk**	<i>Buteo Regalis</i>	T	No habitat available
Southwestern Willow Flycatcher**	<i>Empidonax traillii extimus</i>	E	No habitat available
Mexican Spotted Owl	<i>Strix occidentalis lucida</i>	T	See Attachment 3-2 and Appendix 3-3 (M&RP)
Mammals			
Black-footed Ferret	<i>Mustela nigripes</i>	EX	No habitat available

* Habitat availability in Carbon County/Dugout Mine/Degas Well Sites.

** Utah State Listed Species - Information verified with Bill Bates, DWR (personal communication 7/17/03)

E = A taxon that is listed by the U.S. Fish and Wildlife Service as "endangered" with the possibility of worldwide extinction.

T = A taxon that is listed by the U.S. Fish and Wildlife Service as "threatened" with becoming endangered.

C = A taxon for which the U.S. Fish and Wildlife Service has on file sufficient information on biological vulnerability and threats to justify it being a "candidate" for listing as and endangered or threatened.

Source: Utah Division of Wildlife Resources data base - created 10/24/02

Refer to Appendix 3-3 of the M&RP for a listing of Federal and State Listed, Threatened, Endangered and Candidate Species, Plants and Wildlife of Carbon County, Utah (2003).

322.300 Fish and Wildlife Service Review

If requested, Dugout Canyon authorizes the release of information pertaining to Section 322 and 333 to the U. S. Fish and Wildlife Service Regional and Field Office for their review. On the 25th of May 2005, Leroy Mead of the DWR toured degas well sites G-8, G-9, G-10, G-11 thru G-14. During the tour no wildlife concerns were noted.

323 Maps and Aerial Photographs

Location of the well sites can be seen in Figure 1-1 of this submittal.

323.100 Location and Boundary of Proposed Reference Area

Reference areas for the degassification wells were established during the vegetative study conducted in the Summer of 2003. Well sites G-2, G-3, G-4, G-5, and G-7 will be compared to the Sagebrush/Snowberry/Grass reference area and G-1, G-6, and G-8 to the Aspen/Maple/Douglas Fir reference area. ~~Transitional~~ Mountain Brush and Conifer is the reference area for well sites G-9 thru G-11. The reference area for Degas Well G-12, G-13 and G-15 is Conifer, Mountain Brush and Pinyon Juniper. **The reference area for Degas Well G-14 is Aspen/Conifer, the reference area for G-16 and G-17 is Mountain Brush/Snowberry.** Refer to Attachment 3-1 and Figure 3-1 for the location of the reference areas associated specifically with the degas wells. Reference areas are also shown on Plate 3-1 and 3-1E in the M&RP.

323.200 Elevation and Locations of Monitoring Stations

Refer to Section 323.200 of the approved M&RP.

323.300 Facilities for Protection and Enhancement

Section 333.300 and 358.500 of the approved M&RP contain additional discussion pertaining to protective measures to be taken by Dugout Canyon on behalf of wildlife.

323.400 Vegetation Type and Plant Communities

Vegetative types and plant communities are outlined in the vegetative report in Attachment 3-1. Figure 3-2 gives details of the vegetation types located adjacent to the well sites.

330 OPERATION PLAN

331 Measures Taken to Disturb the Smallest Particle Area

The well sites will be sized to disturb the smallest acreage possible and still meet the requirements for the drilling equipment. The drainage control required will be built to satisfy the environmental requirements.

332 Description of Anticipated Impacts of Subsidence

Refer to Section 525.

333 Plan to Minimize Disturbances and Adverse Impacts

General control and mitigation measures addressing potential related biological impacts will include the following:

- Minimizing the total area of disturbance,
- Design, construction, and operation of the well sites to minimize impacts
- Exclusion of wildlife from potentially hazardous areas, and
- Reclamation of disturbed areas when they are no longer needed.

All water associated with the drilling of these wells will be appropriated and hauled and/or pumped to the sites by a licensed contractor. Since the drilling of degas wells does not involve the mining of coal, the USWFS consumption requirements for underground operations do not apply (i.e., evaporation from ventilation, coal preparation, sediment pond evaporation, subsidence of springs, alluvial aquifer abstractions into the mine, postmining inflow to workings, coal moisture loss, direct diversions).

As inventoried by the Division of Wildlife Resources in 2003, 2004, 2005 and 2006, Nest 424 was determined to be a raven's nest, which was either inactive, not inventoried or found. Wells G-13 and G-14 will be drilled post July 15th, after the exclusionary period for NSO and northern goshawks.

333.100 Minimize Disturbance to Endangered or Threatened Species

Dugout Canyon will apply all methods necessary to minimize disturbances or any adverse effects to threatened or endangered species. See Section 322.200.

333.200 Species and Habitats

All species and habitats within the permit area will be protected to the best of Dugout Canyon's ability.

333.300 Protective Measures

Refer to Section 333.300 of the approved M&RP.

340 RECLAMATION PLAN

341 Revegetation

Revegetation of the sites will occur in two phases at drill site G-2. The first phase is to redistribute topsoil and seed the well area not needed for access and operation of the gas exhaust blower. The second phase will consist of plugging the well and distributing the remaining topsoil and seeding on the remaining pad area. Complete final reclamation at well sites G-2, G-5 and G-7 will be delayed, refer to Section 242.100 for additional detail and Attachment 5-2. Sites G-3, G-4, G-6, G-8 (never constructed), G-9, G-10, G-11 thru G-17 will be reclaimed in one phase.

The short-term goal of this revegetation plan is the immediate stabilization of the disturbed sites through erosion control. This objective will be achieved through controlled grading practices, proper seedbed preparation to encourage rapid plant establishment, inclusion of rapidly establishing species in the seed mixture to be planted, and mulch application.

The long-term goals are to establish useful, and productive range. These goals will be attained through the selection and placement of desirable and productive plant species and a commitment to monitor and maintain revegetated areas throughout the bond liability period.

The well sites will be fenced to discourage wildlife and livestock from grazing the reclaimed areas until bond release.

~~Revegetation responsibilities for well sites G-11 and G-12 will differ from the other sites, refer to Section 357 for additional details.~~

341.100 Schedule and Timetable

The reclamation timetable is shown in Figures 5-15 (G-2) and 5-26 (G-3 thru G-17) of this submittal and the reclamation monitoring schedule is found in Chapter 3, Table 3-3 of the approved M&RP.

341.200 Descriptions

Species and Amounts of Seed - The well sites will be planted with the seed mix listed on Table 3-2. The seed mix will be used in both contemporaneous and final reclamation phases. The seed will be incorporated with a small amount of wood fiber mulch and applied by hydroseeding equipment or broadcast. Refer to Section 234.200 for topsoil stockpile seeding description.

Methods Used for Planting and Seeding - The degassification sites will be graded to final contour, then ripped to relieve compaction. The depth of ripping will be from 18 to 24 inches. Following ripping, topsoil will be applied to the ripped surface and left in a gouged and roughened state.

Mulching Techniques - Wood fiber mulch will be applied on top of the seed with hydroseeding equipment at the rate of 2,000 pounds per acre and anchored with a tackifier in amounts specified by the manufacturer.

Irrigation, Pest, and Disease Control - No irrigation is planned and pesticides will not be used unless previously approved by the Division.

Measures Proposed for Revegetation Success - Refer to Section 356.

341.300 Greenhouse Studies, Field Trials or Other Equivalent Studies

Refer to the Section 341.300 of the approved M&RP.

342 Fish and Wildlife

342.100 Enhancement Measures

Post bond release enhancement measure will include the establishment of vegetation for wildlife food, cover, and the break up of large blocks of monoculture to diversify habitat. The current blocks of monoculture include large area of sagebrush and mixed brush. According to Dean Stacy, Range Management Specialist, USDA-NRCS "past management practices have allowed the shrub (mainly mountain sage brush) to surpass the 25-35%, while the herbaceous production has declined". By planting reclamation seed mixes with grasses and forbs the planted areas will breakup the monocultures and provide a future seed source.

In consultation with UDWR (Tony Wright, July 6, 2004) and UDOGM (Jerriann Ernsten, July 6, 2004) a mitigation project was designated for the Northern Saw Whet Owl to compensate for drilling during the exclusionary period. The project will be completed prior to October 1, 2004. The project will include the construction and installation of 6 to 10 nest boxes on property owned by Canyon Fuel Company, LLC. Because of the UDWR knowledge and experience their personnel will choose the location and install the boxes. Information (goals, procedures, agencies, dates, box locations - township, range, section) concerning the owl mitigation project will be included in the annual report for 2004.

342.200 Plants Used for Wildlife Habitat

Nutritional Value - The nutritional value will be consistent with that of vegetation in the surrounding areas.

Cover - Cover will be comparable to the cover on the associated reference area.

342.300 Cropland

Cropland is not a postmining land use.

342.400 Residential, Public Service, and Industrial Land Use

No residential, industrial or public service use is planned.

350 PERFORMANCE STANDARDS

351 General Requirements

Dugout Canyon commits to conduct all operations in accordance with the plans submitted in Sections R645-301-330 through R645-301-340 of the permit application.

352 Contemporaneous Reclamation

Reclamation activities prior to final reclamation will to the extent feasible, be performed contemporaneously. Contemporaneous reclamation will be performed at the well sites following construction of the wells. Refer to Section 341 for additional details.

353 Revegetation: General Requirements

A vegetative cover will be established on all reclaimed areas to allow for the designated postmining land use of grazing. Refer to Section 411 for additional information.

353.100 Vegetative Cover

The seed mix proposed for revegetation is intended to provide vegetative cover that will be diverse, effective, and permanent. The seed mixture was selected with respect to the climate, potential seedbed quality, erosion control, drought tolerance, and the mixture's ability for quick establishment and spreading.

Native Species - The reclamation vegetation mixture will be comprised of species indigenous to the area and capable of achieving the postmining land use. Diversity of species should allow utilization of plants by wildlife and domestic livestock. The recommended seed mix is comprised of native species.

Extent of Cover - The vegetative cover will be at least equal in extent to the cover at the designated reference areas.

Stabilizing - The vegetative cover mixture is capable of stabilizing the soil surfaces from erosion.

353.200 Reestablished Plant Species

Compatible - The reestablished plant species have been selected to insure their compatibility with the approved postmining use.

Seasonal Characteristics - The revegetation plant species will have the same growing season as the adjacent areas.

Self-Generation - The reestablished plants are species capable of self-generation and plant succession.

Compatibility - The seed mix suggested for revegetation contains plants native to the area and compatible with the plant and animal species of the permit area.

Federal and Utah Laws or Regulations - The seed mix purchased to revegetate the degassification well sites will contain no poisonous or noxious plant (see Section 234.200). No species will be introduced in the area without being approved by the Division.

Table 3-2
Reclamation Seed Mix

<u>SPECIES</u>	<u># pls/acre</u>	<u># pls/sq. ft.**</u>
Grasses, Forbs, and Shrubs		
Kentucky Bluegrass (1,390,000 seeds/lb)*	0.5	16
Mountain Brome (64,000 seeds/lb)*	2.0	3
Sandberg Bluegrass (1,100,000 seeds/lb)*	1.0	25
Bluebunch Wheatgrass (126,000 seeds/lb)*	4.0	12
Bottlebrush Squirreltail (192,000 seeds/lb)*	1.0	4
Rocky Mountain Penstemon (478,000 seeds/lb)*	1.0	11
Mountain Lupine (12,000 seeds/lb)*	3.0	1
Mtn. Snowberry (54,000 seeds/lb)*	4.0	5
Wyoming Big Sage (2,500,000 seeds/lb)*	<u>0.5</u>	<u>29</u>
TOTAL	17	106

* Native Plants

** Rounded nearest whole seed

Grass seed quantities will be doubled if the area is broadcast seeded.

353.300 Vegetative Exception

Dugout Canyon does not require vegetative exception at this time.

353.400 Cropland

The permit area contains no land designated as cropland.

354 Revegetative: Timing

Dugout Canyon will follow the recommended guidelines for revegetation and planting during the first normal period for favorable planting conditions after replacement of the topsoil. In Utah the planting period is usually Fall due to the precipitation events.

355 Revegetation: Mulching and Other Soil Stabilizing Practices

Mulch and/or other soil stabilizing practices (roughing, etc.) will be used on all areas that have been regraded and covered by topsoil (Section 341.200). Dugout Canyon Mine will exercise care to guard against erosion during and after application of topsoil.

356 Revegetation: Standards for Success

356.100 Success of Revegetation

The success of revegetation will be judged on the effectiveness of the vegetation for postmining land use, the extent of cover on each degassification well site compared to their respective reference areas.

Sampling Techniques - Dugout Canyon will comply with the standards for success, statistically valid sampling techniques for measuring success, and the approved methods outline in the Division's "Vegetation Information Guidelines, Appendix A" for sampling.

The sampling methods to be used during reclamation will be specific to the requirements at the time of reclamation. Nonetheless, according to the currently approved UDOGM guidelines, these sampling methods would be used: sample adequacy, cover (line interception), density (belt transects or plots) and productivity (clipping). The Jaccard's Community Coefficient will be used to calculate acceptable plant similarity and diversity.

Standards for Success - The standards for success will include criteria representative of undisturbed lands in the area of the degas wells as means to evaluate ground cover, production and stocking of the reclaimed site.

356.200 Standards for Success

Standards of success will be applied in accordance with the approved postmining land use as described in this section.

Grazing Land and Pasture Land - The ground cover and production of living plants on the revegetated area will be at least equal to the reference area.

Cropland - There is no area designated as cropland within the degassification well sites.

Fish and Wildlife Habitat - The postmining land use for the degas well sites will be grazing, except on pre-existing roads. Pre-existing roads will be returned to their approximate original contour and compacted.

Industrial, Commercial or Residential - The postmining land use for the permit area is not designated for industrial, commercial, or residential use.

Previously Disturbed Areas - Site G-1 (never constructed), G-4, G-6, G-7, G-8 (never constructed), G-9, G-10, G-11, G-12, G-14, G-15, G-16 and G-17 have been previously disturbed. Sites G-2, G-3, G-5, and G-13 have not been previously disturbed. Standards of success for all sites will be applied in accordance with the postmining land use of grazing as described in this section.

356.300 Siltation Structures

Siltation structures will be maintained until the disturbed areas have been stabilized and revegetated. For additional details on siltation structures, see Sections 542 and 763 of this amendment.

356.400 Removal of Siltation Structures

The land on which siltation structures are located will be revegetated in accordance with the reclamation plan discussed in Section 353 and 357. Refer to Section 763 for addition information pertaining to the removal of siltation structures.

357 Revegetation: Extended Responsibility Period

Dugout Canyon will be responsible for the success of revegetation for a period of 10 years following seeding of the reclaimed area or upon Division bond release. ~~Well sites G-11 and G-12, will be released to the land owner once the venting has been completed and the land owner's stipulations met, relieving the mine of revegetation responsibilities. Refer to Attachment 2-3 of this amendment for a copy of the land owner's request letter.~~

357.100 Extended Period Begins

The period of extended responsibility will begin after disturbed areas have been reseeded.

357.200 Vegetation Parameters

Vegetation parameters will equal or exceed the approved success standard during the last 2 years of the responsibility period. The success standards are outline in Section 356 of this application.

357.300 Husbandry Practices

The use of husbandry practices are not being requested by Dugout Canyon for the degas well sites.

358 Protection of Fish, Wildlife, and Related Environmental Values

Dugout Canyon will minimize disturbances and adverse impacts on wildlife and their related environments as outline in Section 333 of the approved M&RP and Section 342 of this submittal. See Chapter 7, Section 731.100 of the approved M&RP for methods to protect water sources in the area.

358.100 Existence of Endangered or Threatened Species

The well sites will not be constructed or operated where they might jeopardize the existence of any endangered or threatened species. Refer to Section 322.200 and Attachments 3-1, 3-2 and 3-3 for additional information pertaining to threatened, endangered, and sensitive species.

State or federally listed endangered or threatened species will be reported to the Division upon its discovery.

358.200 Bald and Golden Eagles

Dugout Canyon understands that there is no permission implied by these regulations for taking of bald or golden eagles, their nests, or eggs. If found, nests will be reported to the Division.

358.300 Taking of Endangered or Threatened Species

Dugout Canyon understands that there is no permission implied by these regulations for taking of endangered or threatened species, their nests, or eggs.

358.400 Replacement of Wetland or Riparian Vegetation

The sites contain no wetland or riparian vegetation.

358.500 Manmade Wildlife Protection Measure

Electric Power Lines - No utilities will exist at the well sites.

Potential Barriers - No potential barriers will exist at any of the well sites, except for the perimeter fence. No ponds exist at the well sites. Refer to Sections 231.100 and 242 for information pertaining to the mud pit.

Canyon Fuel Company, LLC
Dugout Canyon Mine

Methane Degassification Amendment
July 13, 2006 ~~March 16, 2006~~

CHAPTER 4
LAND USE AND AIR QUALITY

TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
410 LAND USE	4-1
411 Environmental Description	4-1
411.100 Preming Land Use	4-1
411.110 Land Use Map and Narrative	4-1
411.120 Land Capacity	4-1
411.130 Land Use Description	4-2
411.140 Cultural and Historic Resources Information	4-2
411.200 Previous Mining Activity	4-3
412 Reclamation Plan	4-3
412.100 Postmining Land-Use Plan	4-3
412.200 Land Owner or Surface Manager Comments	4-4
413 Performance Standards	4-4
413.100 Postmining Land Use	4-4
413.200 Determining Preming Uses of Land	4-4
413.300 Criteria for Alternative Postmining Land Uses	4-4
414 Alternative Land Use	4-4
420 AIR QUALITY	4-5
421 Air Quality	4-5
422 Compliance Efforts	4-5
423 Monitoring Program	4-5
424 Fugitive Dust Control Plan	4-5
425 Additional Division Requirements	4-5

Canyon Fuel Company, LLC
Dugout Canyon Mine

Methane Degassification Amendment
July 13, 2006 ~~March 16, 2006~~

LIST OF ATTACHMENTS

Attachment 4-1 Information Moved to Confidential Folder in 2005
Attachment 4-2 Surface Land Owner Agreement

410 LAND USE

411 Environmental Description

A statement of the conditions and capabilities of the land to be affected by mining and reclamation operations follows in this section.

411.100 Premining Land Use

The area is utilized for the landowners private use, including hunting and as open range for livestock and wildlife.

411.110 Land Use Map and Narrative

Refer to the same section of the approved M&RP.

411.120 Land Capability

The major plant communities at the well sites are identified in Section 321. No cultivated lands lie within the well boundaries, due to the limiting terrain and lack of water for irrigation. Refer to Section 321.200, Table 3-1 of this submittal for forage production per acre for each well site.

The well site areas are located on the flatter mesa tops and rolling terrain. This type of terrain receives heavier pressure because of more available forage and easier movement by livestock.

411.130 Land Use Description

The wells are located on land administered by Milton & Ardith Thayn Trust and zoned by Carbon County for mining and grazing (MG-1).

No industrial or municipal facilities are located on or immediately adjacent to the well sites.

411.140 Cultural and Historic Resources Information

Cultural and Historic Resource Maps - Archaeological surveys were conducted in 2003 of the well sites G-1 through G-6. Nothing was found that required future investigation. There are no cemeteries, public parks, or units of the National System of Trails or the Wild and Scenic Rivers System located within the well site boundaries. The reports can be found in Attachment 4-1 of this submittal, Appendix 4-1 and 4-3 of the M&RP and in the Confidential Folder. Well site G-7 and G-8 were inventoried by AERC in 1980 (see below), a letter from John Senulis of Senco-Phenix to SHPO has been written requesting proof of clearance for the G-7 and G-8 sites. A copy of the Senco-Phenix letter is included in the confidential folder.

Previous research in 1980 by "AERC surveyed several sample blocks in Sections 13 and 24, T13S, R12E and Sections 18, 19 and 30 T13S, R13E. They also surveyed the access road into the Snow Mine site. One archeological site (42CB292) was located. The site was described as "Coal mine located in Pace Canyon consists of one known mine portal which has been closed. Site of historic Snow Mine in Pace Canyon which was active in 1906 but had its primary production period from 1932-1940." The site was relatively pristine at the time and still contained a standing coal loadout and foundation with depth potential. Avoidance was recommended pending further historic research. As noted the site has since been extensively modified" (Attachment 4-1, Senco-Phenix, June 24, 2003, SPUT-455, page 2).

Access to the degas holes will not impact or disturb what remains of the archeological site (42CB292). The road in the bottom of Pace Canyon passes the archeological site, but the closed portal is not visible from the road, therefore there is nothing to draw attention to the site. The loadout referenced in the survey no longer exist at the site.

During June 2005 a Class III intensive walkover survey was performed of the access roads and degas well sites G-9 thru G-13 and site DUG0105/DUG0205 (G-14) by Senco-Phenix. The well sites are being permitted in groups. Wells G-8 thru G-10 are the group currently being presented for consideration for approval. In the canyon where degas well sites G-9 and G-10 are located near site 42CB2435. The major portion of the site has been removed and there is little potential for further information. The site is not considered eligible for the NRHP. Reference the Confidential Binder for further information pertaining to the aforementioned survey. Per the survey "No other cultural resources were located and the potential for undetected remains is remote. A finding of no effect is appropriate and archeological clearance without stipulations is recommended" by Senco-Phenix to SHPO for the G-8 thru G-14 degas well sites. Site 42CB1595 was recommended for archeological clearance without stipulations by Senco-Phenix to SHPO and was not recommended as eligible for the NRHP.

The sites of G-11 and G-16 were previously used for coal exploration holes. No "areas of critical environmental concern" or "native american religious concerns" were identified for either site in the archeological inventory of the area conducted by Senco-Phenix Archeological Consulting Services in June 20, 2001 (SPUT-387, Confidential Binder) and no cultural or historical properties were listed by NRHP. Site G-11 was labeled as "DT-2" and site G-16 was labeled as "E" in SPUT-387.

Sites G-15 (DUG0204), G-17 (DUG0304) were previously used for coal exploration holes. An archeological inventory of the area was conducted by Senco-Phenix Archeological Consulting Services in 2002 (SPUT-457, Confidential Binder) and no historical or cultural resources were identified for listing by NRHP/SHPO. Site G-15 was labeled as "DUG0204" and site G-17 was labeled as "DUG0304" in SPUT-457.

A drawing has been prepared by archeological consultants "Senco-Phenix" designating areas including roads surveyed for archeological and cultural resources. The drawing entitled "Previous Archeological Surveys, July 2006" is included in the confidential binder. The road used for access to all degas drill sites have been surveyed.

Dugout Canyon agrees to notify the Division and State Historical Preservation Office (SHPO) of previously unidentified cultural resources discovered in the course of operations. Dugout Canyon also agrees to have any such cultural resources evaluated in terms of NRHP eligibility criteria. Protection of eligible cultural resources will be in accordance with Division and SHPO requirements. Dugout Canyon will also instruct its employees that it is a violation of federal and state law to collect individual artifacts or to otherwise disturb cultural resources.

411.200 Previous Mining Activity

Dugout Canyon has no knowledge of the removal of coal or other minerals in the well site areas.

412 Reclamation Plan

412.100 Postming Land-Use Plan

All uses of the land prior to the wells construction/operation and the capacity of the land to support prior alternate uses will remain available throughout the life of the sites.

Dugout Canyon intends the postmining land use to be livestock and wildlife grazing and other uses as dictated by the land owner (hunting, roads, etc.). Final reclamation activities will be completed in a manner to provide the lands able to parallel the premining land use.

~~A post mining land use change application will be filed with the Division for well sites G-11 and G-12 allowing the release to the landowner once the venting has been completed and the land~~

~~owner's stipulations met, relieving the mine of revegetation responsibilities. Refer to Attachment 5-3 of this amendment for a copy of the land owner's request letter.~~

~~Well sites G-11 and G-12, will be released to the land owner once the venting has been completed and the land owner's stipulations met, relieving the mine of revegetation responsibilities. Refer to Attachment 2-3 of this amendment for a copy of the land owner's request letter.~~

412.200 Land Owner or Surface Manager Comments

Milton & Ardith Thayn Trust is the landowner. Canyon Fuel Company, LLC has a surface land owner agreement with the Thayne Trust for the drilling of degassification holes (Attachment 4-2). Prior to drilling the landowner will be contacted and the requirements related to drilling as outlined in the surface land owner agreement will be met. A copy of the letter will be included in Attachment 4-2.

413 Performance Standards

413.100 Postmining Land Use

Postmining land uses are discussed in Section 412.100. The postmining lands will be reclaimed in a timely manner and capable of supporting such uses (see Chapters 2, 3, 5, and 7).

413.200 Determining Premining Uses of Land

Refer to Section 411.100.

413.300 Criteria for Alternative Postmining Land Uses

No alternative postmining land uses have been planned.

414 Alternative Land Use

No alternative postmining land uses have been planned.

420 AIR QUALITY

421 Air Quality Standards

Dugout Canyon activities will be conducted in compliance with the requirements of the Federal Clean Air Act and the Utah Air Conservation Rules.

422 Compliance Efforts

See Fugitive Dust Control Plan, Section 424.

423 Monitoring Program

Refer to the same section in the approved M&RP.

424 Fugitive Dust Control Plan

Operational areas that are used by mobile equipment will be water sprayed to control fugitive dust. The application of water will be of sufficient frequency and quantity to maintain the surface material in a damp/moist condition unless it is below freezing.

425 Additional Division Requirements

Refer to the same section of the approved M&RP.

Canyon Fuel Company, LLC
Dugout Canyon Mine

Methane Degassification Amendment
July 13, 2006 ~~March 16, 2006~~

CHAPTER 5 ENGINEERING

TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
510 INTRODUCTION	5-1
511 General Requirements	5-1
512 Certification	5-1
512.100 Cross Sections and Maps	5-1
512.200 Plans and Engineering Designs	5-2
513 Compliance With MSHA Regulations and MSHA Approval	5-2
513.100 Coal Processing Waste Dams and Embankments	5-2
513.200 Impoundments and Sedimentation Ponds	5-2
513.300 Underground Development Waste, Coal Processing Waste, and Excess Spoil	5-3
513.400 Refuse Piles	5-3
513.500 Underground Openings to the Surface	5-3
513.600 Discharge to Underground Mine	5-3
513.700 Surface Coal Mining and Reclamation Activities	5-3
513.800 Coal Mine Waste Fire	5-3
514 Inspection	5-4
514.100 Excess Spoil	5-4
514.200 Refuse Piles	5-4
514.300 Impoundments	5-4
515 Reporting and Emergency Procedures	5-4
515.100 Slides	5-4
515.200 Impoundments Hazards	5-4
515.300 Temporary Cessation of Operations	5-5
520 OPERATION PLAN	5-5
521 General	5-5
521.100 Cross Sections and Maps	5-5
521.200 Signs and Markers	5-6

TABLE OF CONTENTS(Continued)

<u>Section</u>	<u>Page</u>
522 Coal Recovery	5-7
523 Mining Methods	5-7
524 Blasting and Explosives	5-7
525 Subsidence	5-7
526 Mine Facilities	5-7
526.100 Mine Structures and Facilities	5-7
526.200 Utility Installation and Support Facilities	5-8
527 Transportation Facilities	5-8
527.100 Road Classification	5-8
527.200 Description of Transportation facilities	5-8
528 Handling and Disposal of Coal, Excess Spoil, and Coal Mine Waste	5-8
529 Management of Mine Openings	5-9
530 OPERATIONAL DESIGN CRITERIA AND PLANS	5-9
531 General	5-9
532 Sediment Control	5-9
533 Impoundments	5-10
534 Roads	5-10
535 Spoil	5-10

TABLE OF CONTENTS(Continued)

<u>Section</u>	<u>Page</u>
536 Coal Mine Waste	5-10
537 Regraded Slopes	5-10
537.100 Division Approval	5-10
537.200 Regrading of Settled and Revegetative Fills	5-10
540 RECLAMATION PLAN	5-11
541 General	5-11
541.100 Commitment	5-11
541.200 Surface Coal Mining and Reclamation Activities	5-11
541.300 Underground Coal Mining and Reclamation Activities	5-11
541.400 Environmental Protection Performance Standards	5-11
542 Narratives, Maps, and Plans	5-12
542.100 Reclamation Timetable	5-12
542.200 Plan for Backfilling, Soil Stabilization, Compacting, and Grading ..	5-12
542.300 Final Surface Configuration Maps and Cross Sections	5-12
542.400 Removal of Temporary Structures	5-12
542.500 Removal of Sedimentation Pond	5-13
542.600 Roads	5-13
542.700 Final Abandonment of Mine Openings and Disposal Areas	5-13
542.800 Estimated Cost of Reclamation	5-13
550 RECLAMATION DESIGN CRITERIA AND PLANS	5-14
551 Casing and Sealing of Underground Openings	5-14
552 Permanent Features	5-14
552.100 Small Depressions	5-14
552.200 Permanent Impoundments	5-14
553 Backfilling and Grading	5-14
553.100 Disturbed Area Backfilling and Grading	5-14

TABLE OF CONTENTS(Continued)

<u>Section</u>	<u>Page</u>
553.200 Spoil and Waste	5-15
553.250 Refuse Piles	5-15
553.300 Exposed Coal Seams, Acid and Toxic Forming Materials and Combustible	5-15
553.400 Cut and Fill Terraces	5-15
553.500 Highwall From Previously Mined Areas	5-15
553.600 Previously Mined Areas	5-16
553.700 Backfilling and Grading - Thin Overburden	5-16
553.800 Backfilling and Grading - Thick Overburden	5-16
553.900 Regrading of Settled and Revegetated Fills	5-16
560 PERFORMANCE STANDARDS	5-16

LIST OF ATTACHMENTS

Attachment 5-1	Degas Wells G-8, G-9, G-10, G-11 thru G-17
Attachment 5-2	Methane Degassification
Attachment 5-3	Land Owner Correspondence

LIST OF FIGURES

Figure 5-1 Contour Map For G-1 5-17
Figure 5-2 Typical Cross Sections For G-1 5-18
Figure 5-3 Approximate Drilling Layout For G-1 5-19
Figure 5-4 Approximate Operational Layout For G-1 5-20
Figure 5-5 Contour Map For G-2 5-21
Figure 5-6 Typical Cross Sections For G-2 5-22
Figure 5-7 Approximate Drilling Layout For G-2 5-23
Figure 5-8 Approximate Operational Layout For G-2 5-24
Figure 5-9 Contour Map For G-3 5-25
Figure 5-10 Typical Cross Sections For G-3 5-26
Figure 5-11 Approximate Drilling Layout For G-3 5-27
Figure 5-12 Approximate Operational Layout For G-3 5-28
Figure 5-13 Typical Road Cross Section 5-29
Figure 5-14 Typical Access Road Cross Section 5-30
Figure 5-15 Reclamation Time Table 5-31
Figure 5-16 Typical Well Design 5-32
Figure 5-17 Contour Map For G-4 5-33
Figure 5-18 Typical Cross Sections For G-4 5-34
Figure 5-19 Approximate Drilling Layout For G-4 5-35
Figure 5-20 Contour Map For G-5 5-36
Figure 5-21 Typical Cross Sections For G-5 5-37
Figure 5-22 Approximate Drilling Layout For G-5 5-38
Figure 5-23 Contour Map For G-6 5-39
Figure 5-24 Typical Cross Sections For G-6 5-40
Figure 5-25 Approximate Drilling Layout For G-6 5-41
Figure 5-26 Reclamation Schedule - Wells G-4, G-5, G-6 and G-7 5-42
Figure 5-27 Contour Map For G-7 5-39
Figure 5-28 Typical Cross Sections For G-7 5-40
Figure 5-29 Approximate Drilling Layout For G-7 5-41

510 INTRODUCTION

This chapter provides a discussion of general engineering aspects, an operation plan, a reclamation plan, design criteria, and performance standards related to the degassification well sites. The activities associated with the construction and reclamation of the well sites have been or will be designed, located, constructed, maintained, and reclaimed in accordance with the operation and reclamation plans.

511 General Requirements

The permit application includes descriptions of construction, maintenance, and reclamation operations of the proposed well sites with maps and plans. Potential environmental impact as well as methods and calculations utilized to achieve compliance with the design criteria are also presented.

512 Certification

Where required by the regulations, cross sections and maps in this permit application have been prepared by or under the direction of, and certified by, qualified registered professional engineers or land surveyors. As appropriate, these persons were assisted by experts in the fields of hydrology, geology, biology, etc.

512.100 Cross Sections and Maps

Cross sections for the degassification well pads are shown on Figures 5-2, 5-6, 5-10, 5-18, 5-21, 5-24 and typical road cross sections are shown on Figures 5-13 and 5-14. Cross sections for the degassification well pads G-8, G-9, G-10, G-11 thru G-17 are shown on figures located in Attachment 5-1.

512.200 Plans and Engineering Designs

Excess Spoil - No excess spoil will be generated from the well sites.

Durable Rock Fills - No durable rock fills will exist at the well sites.

Coal Mine Waste - No coal mine waste will exist at the well sites.

Impoundments - Refer to Section 733.200 of this submittal.

Primary Roads - Short sections of road are required to access well sites G-2, G-5, ~~G-14~~ and G-16. These access roads are classified as primary roads. ~~Topsoil will be stripped from the road alignment and either wind rowed adjacent to the road or stored with the topsoil stripped from the pad area prior to grading the new access road.~~ Well sites G-1 and G-8 (not drilled), G-3 thru ~~G-13~~ and G-15, are on existing roads, no access roads will be constructed. **Refer to Section 527.200 for additional information.**

Variance from Approximate Original Contour - No variance from approximate original contour is required for the well sites.

513 Compliance with MSHA Regulations and MSHA Approval

513.100 Coal Processing Waste Dams and Embankments

No coal processing waste dams and embankments will exist at the well sites.

513.200 Impoundments and Sedimentation Ponds

Refer to Section 733.200 of this submittal.

513.300 Underground Development Waste, Coal Processing Waste, and Excess Spoil

No underground waste, coal processing waste, and excess spoil will exist at the well sites.

513.400 Refuse Piles

No refuse piles will exist at the well sites.

513.500 Underground Openings to the Surface

The well will be equipped with a valve that will be closed and locked when not in use. A typical well head is shown in Figure 5-16.

513.600 Discharge to Underground Mine

No discharge to the underground mine will occur at the well sites.

513.700 Surface Coal Mining and Reclamation Activities

No surface coal mining, or reclamation activities associated with surface coal mining will occur at the well sites.

513.800 Coal Mine Waste Fire

No coal waste will be developed, therefore, no coal waste fires will occur at the well sites.

514 Inspection

514.100 Excess Spoil

No excess spoil will be stored at the well sites.

514.200 Refuse Piles

No refuse piles will exist at the well sites.

514.300 Impoundments

Refer to Section 733.200 of this submittal.

515 Reporting and Emergency Procedures

515.100 Slides

Refer to Section 515.100 in the approved M&RP.

515.200 Impoundments Hazards

No impoundments will exist at the well sites.

515.300 Temporary Cessation of Operations

If temporary cessation of the mining operations does occur, the wells will remain open. Once liberation of the methane gas is completed, the wells will be sealed as discussed in Section 542.700 of this submittal.

520 OPERATION PLAN

521 General

See Figures 5-1, 5-5, 5-9, 5-17, 5-20, 5-23, 5-27 and Attachment 5-1 (G-8 thru G-17) for the contour map showing pre-disturbance and drilling phase contours. These figures also show the disturbed area boundary and the new access road contours. Figures 5-3, 5-7, 5-11, 5-19, 5-22, 5-25, 5-29 and Attachment 5-1 (G-8 thru G-17) show the layout of the well sites during the drilling phase. Figures 5-4, 5-8, 5-12 show the layout of the well sites during the operational phase and the area to be reclaimed at the completion of drilling. Cross sections for each site can be found on Figures 5-2, 5-6, 5-10, 5-18, 5-21, 5-24, 5-28 and Attachment 5-1 (G-8 thru G-17).

521.100 Cross Sections and Maps

Existing Surface and Subsurface Facilities Features - No buildings are located on or within 1,000 feet of any of the well sites.

Landowner, Right-of-Entry, and Public Interest - The land which the wells will be drilled on is owned by the Milton and Ardith Thayn Trust. Canyon Fuels, LLC has reached an agreement with the Thayn trustees to allow access for the construction and drilling of the wells (see Attachment 4-2).

Mining Sequence and Planned Subsidence - Refer to Section 525. Mining sequence maps showing the location of drilled degas wells are submitted to the BLM and UDOGM as part of their annual reports.

Land Surface Configuration - Surface contours of undisturbed well sites are included in Figures 5-1, 5-5, 5-9, 5-17, 5-20, 5-23, 5-27 and Attachment 5-1 (G-8 thru G-17).

Surface Facilities - No permanent surface facilities will exist at the well sites.

521.200 Signs and Markers

Mine and Permit Identification Signs - A mine and permit identification sign will be displayed at each well site. This sign will be a design that can be easily seen and read, will be made of durable material, will conform to local regulations, and will be maintained until after the release of all bonds for the well site areas. The sign will contain the following information:

- Mine name,
- Company name,
- Company address and telephone number
- MSHA identification number, and
- Permanent program permit identification number

Perimeter Markers - The perimeter of all areas affected will be clearly marked before beginning mining activities. The markers will be a design that can be easily seen and read, will be made of durable material, will conform to local regulations, and will be maintained until after the release of all bonds for the permit area.

Buffer Zone Markers - Stream buffer zone markers will not be required at the G-2 thru G-10, G-13, G-14, G-16 and G-17 well sites. Stream buffer zone markers will be placed at G-11, G-12 and G-15.

Topsoil Markers - Markers will be placed on all topsoil stockpiles. These markers will be a design that can be easily seen and read, will be made of durable material, will conform to local regulations, and will be maintained until topsoil is redistributed on the well sites.

Construction Markers - Not applicable.

Hazard Signs - Signs will be placed at the degas wells with open degas holes, declaring danger, no smoking, etc.

522 Coal Recovery

No coal recovery will be performed at the well sites. The operator has been contacted by the BLM, in reference to changes in Operator's R2P2 associated with Federal Regulation 43 CFR Chapter 11, Subpart 3484. Degas wells G-11 and G-12 are on the SITLA lease and not on a federal lease, therefore changes in the R2P2 are not required.

523 Mining Methods

No mining will be performed at the well sites.

524 Blasting and Explosives

No explosives are to be used at the well sites.

525 Subsidence

No subsidence will occur at the well sites, as a result of drilling and development of the degassification well sites. Subsidence could occur at the well site because of underground mining see Section 525 of the approved M&RP.

526 Mine Facilities

526.100 Mine Structures and Facilities

No buildings exist or are proposed at the well sites; therefore, no existing building will be used in connection with or to facilitate this proposed coal mining and reclamation plan.

526.200 Utility Installation and Support Facilities

No utilities are to be installed at the well sites. A portable methane exhaust unit will be temporarily installed to draw methane to the surface from the mined panel. The exhaust blower will be started by using propane from portable tanks. Once started and running, the unit will be powered by burning the extracted methane gas. The level of extracted methane required to operate the exhaust blower is greater than 30%. Excess methane will be vented to the atmosphere. The blower is approximately 12-feet long by 6-feet wide and about 10-feet tall. It is not known how long the degassification of the longwall panel will take.

527 Transportation Facilities

527.100 Road Classification

Well sites will be developed near existing private roads as shown on Figures 1-1, 5-1, 5-5, 5-9, 5-17, 5-20, 5-23, 5-27 and Attachment 5-1 (G-8 thru G-17). The new access roads will be classified as primary roads and will be maintained by the permittee (see Figure 5-14).

527.200 Description of Transportation Facilities

The well sites were chosen close to existing roads in the area to limit surface disturbance. The existing roads were constructed and are maintained by the land owner. The existing roads are approximately 20 feet wide and are shown on Figures 5-1, 5-5, 5-9, 5-17, 5-20, 5-23, 5-27 and Attachment 5-1 (G-8 thru G-17). See Figure 5-13 for a typical cross section of the existing roads.

The access road to the G-16 well site follows an existing road which has been reclaimed. The incised road is approximately 500 feet long, 15 to 20 feet wide and will be constructed on compacted subsoil. Topsoil will be stripped from the road alignment and either wind rowed adjacent to the road or stored with the topsoil stripped from the pad area. The access road will have a maximum grade of 10% and an average grade of 5%. The road will be constructed as shown on Figure 5-14 in the approved methane degassification amendment. As needed, water bars will be used to direct flow off the road and either silt fences or strawbales will be used to treat runoff. Refer to Chapter 5, Attachment 5-1 for drawings of well site. The access road to G-16 is also discussed in Chapter 7, Section 732.400.

528 Handling and Disposal of Coal, Excess Spoil, and Coal Mine Waste

No disposal of coal, excess spoil, and coal mine waste will occur at the well sites.

529 Management of Mine Openings

The perimeter of the sites, including the topsoil stockpiles will be fenced with gates on the access roads. The well casing will have a valve that is closed and locked. The valve will also prevent access by animals or other material. Mine openings will be monitored in accordance with Federal and State Regulations.

During the life of the methane wells, the sites will be inspected as needed by mine personnel to verify the continued operation of the pumping equipment and general site conditions. Motorized

Canyon Fuel Company, LLC
Dugout Canyon Mine

Methane Degassification Amendment
July 13, 2006 ~~March 16, 2006~~

vehicles to access the methane wells may include trucks, four-wheelers, a snow cat, snowmobiles and etc.

530 OPERATIONAL DESIGN CRITERIA AND PLANS

531 General

This section contains the general plans for the construction of sediment controls and general construction and maintenance of the well sites.

The decision to construct each well will be based on the amount of methane encountered during mining. If small amounts of methane are encountered and the mine's ventilation system can dilute the methane, no well will be drilled. The proposed well site locations are shown on Figure 1-1.

The topography above the Dugout Canyon Mine severely limits the selection of methane drainage drill sites (degas wells). Various other factors also affect the drill site locations. These include proximity to the mining area, existing access verses new access, site slope, meeting reclamation success standards, etc. Sites with exiting access are given preference over sites without, where possible sites are located along existing roads and at other pre-disturbed areas. In addition, drill methods are often modified (using directional drilling methods vs. conventional vertical drilling methods) to allow drilling along existing access and to reduce environmental impacts. Directional drilling methods allow the surface site to be located as described yet allow the bottom of the hole to be completed in the required mining area.

532 Sediment Control

Sediment control measures for the well sites are described in Sections 732 and 742 of this submittal. Runoff control structures at the well sites have been designed to convey runoff in a non-erosive manner. Sediment yields in the well permit area are minimized by:

- Disturbing the smallest practicable area during the construction of the well site and
- Contemporaneously reclaiming areas suitable for such reclamation.

533 Impoundments

No impoundments will exist at the well sites.

534 Roads

Refer to Section 527 of this submittal.

535 Spoil

No spoil will be generated at the well sites.

536 Coal Mine Waste

No coal mine waste will be stored at the well sites.

537 Regraded Slopes

537.100 Division Approval

No mining or reclamation activities will be conducted in the permit area that requires approval of the Division for alternative specifications or for steep cut slopes.

537.200 Regrading of Settled and Revegetated Fills

Upon completion of the well site, the areas not required for the exhaust blower will be regraded to approximate original contour. Because of the nature of the well site, settling is not anticipated. However, if settlement does occur, these areas will be regraded.

540 RECLAMATION PLAN

541 General

541.100 Commitment

Upon the permanent cessation of methane venting, Dugout Canyon Mine will seal the wells and permanently reclaim all affected areas in accordance with the R645 regulations and this reclamation plan.

541.200 Surface Coal Mining and Reclamation Activities

Not applicable.

541.300 Underground Coal Mining and Reclamation Activities

Upon completion of the methane venting activities the wells will be reclaimed.

541.400 Environmental Protection Performance Standards

The plan presented is designed to meet the requirements of R645-301 and the environmental protection performance standards of the State Program.

542 Narratives, Maps, and Plans

542.100 Reclamation Timetable

A timetable for the completion of each major step in the reclamation plan is presented in Figure 5-15 (G-2 and G-5) and 5-26 (G-3, G-4, G-6 thru G-12). Per Task ID #2408, "the Division requires notification and a reasonably specific time to initiate the reclamation activities associated with degassification well sites". In addition to the two figures referenced above, information pertaining to reclamation timing for methane degas wells is provided in Attachment 5-2 of this amendment.

542.200 Plan for Backfilling, Soil Stabilization, Compacting, and Grading

Following completion of the venting activities, the well site will be prepared for contouring and soil distribution. Details regarding topsoil placement and revegetation are provided in Section 242 and Section 353, respectively.

Sedimentation Pond Removal and Interim Sediment Control - See Section 542.500 of this submittal.

542.300 Final Surface Configuration Maps and Cross Sections

The sites will be regraded to the approximate original contour, the contours representing the pre-disturbance topography also represent the reclamation topography. Refer to Figures 5-2, 5-6, 5-10, 5-18, 5-21, 5-24, 5-28 and Attachment 5-1 (G-8 thru G-17) to see cross sections representing the final surface configuration.

542.400 Removal of Temporary Structures

The well sites will not have surface structures.

542.500 Removal of Sedimentation Pond

No sediment pond will be constructed at the well sites.

542.600 Roads

The roads which existed prior to the drilling program will be retained after reclamation. The access roads established during the drilling program will be reclaimed after methane extraction has been completed. See Section 242 for additional detail concerning the reclamation plan.

The road to well site G-16 is pre-existing however it has been reclaimed, the road to access well sites G-13, G-14, G-15 and G-17 are existing roads. Subsoil being cut in order to construction the pad for well G-15 will be placed on the existing road, causing it to be elevated.

542.700 Final Abandonment of Mine Openings and Disposal Areas

Degas drill holes G-9 thru G-17 will be sealed in accordance with Federal Regulations 43 CFR Ch. 11, Subpart 3484, (3) per a decision by the BLM and UDOGM.

The casings on degas well sites G-2 thru G-7 will be plugged at the bottom to hold concrete. A lean concrete mixture will be poured into the casing until the concrete is within five (5) feet of the surface. At that time the casing will be cut off at ground level and the rest of the casing will be filled with lean concrete. The concrete will be allowed to harden before final reclamation is completed.

A copy of 43 CFR Ch. 11, Subpart 3484, (3) and a discussion of how methane is removed from mines is contained in Attachment 5-2.

542.800 Estimated Cost of Reclamation

Refer to the Appendix 5-6 of the existing M&RP. It is anticipated that the cost of reclamation of the well sites is adequately covered by the Dugout Canyon Reclamation Bond, refer to Chapter 8 for additional detail.

550 RECLAMATION DESIGN CRITERIA AND PLANS

551 Casing and Sealing of Underground Openings

Permanent sealing is described in Section 542.700.

552 Permanent Features

552.100 Small Depressions

No permanent small depressions will be created as part of the well site construction and reclamation.

552.200 Permanent Impoundments

See Section 515.200 of this submittal.

553 Backfilling and Grading

553.100 Disturbed Area Backfilling and Grading

Approximate Original Contour - The well sites will be returned to their approximate original contour after reclamation is completed., ~~with the exception of well sites G-11 and G-12.~~

Erosion and Water Pollution - Sediment controls will consist of gouging the surface to create depressions and mounds which store and impede the movement of water. As vegetation becomes established on the reclaimed surface, erosion potential will be further minimized.

Post-Mining Land Use - The disturbed area will be reclaimed in a manner that supports the approved post-mining land use. Refer to Sections 411 and 412 for additional detail.

553.200 Spoil and Waste

Spoil - No spoil will be generated within the well sites.

Coal Processing Waste - No coal processing waste will be generated within the well sites.

553.250 Refuse Piles

No refuse piles will exist at the well sites.

553.300 Exposed Coal Seams, Acid and Toxic Forming Materials and Combustible Materials

No coal seams will be left exposed at the well sites. All wells will be sealed according to Federal and State regulations.

553.400 Cut and Fill Terraces

No cut and fill terraces will be constructed at the well sites.

553.500 Highwall From Previously Mined Areas

No highwalls exist or will be built at the well sites.

553.600 Previously Mined Area

No previously mined areas exist at the well sites.

553.700 Backfilling and Grading - Thin Overburden

No surface mining and reclamation activities involving thin overburden will occur at the well sites.

553.800 Backfilling and Grading - Thick Overburden



No surface mining and reclamation activities involving thick overburden will occur at the well sites.

553.900 Regrading of Settled and Revegetated Rills

If settlement or rills occur at the well sites, they will be regraded and revegetated. Refer to Section 244.300.

560 PERFORMANCE STANDARDS

Dugout Canyon Mine well sites will be conducted in accordance with the approved permit and the requirements of R645-301-510 through R645-301-553.

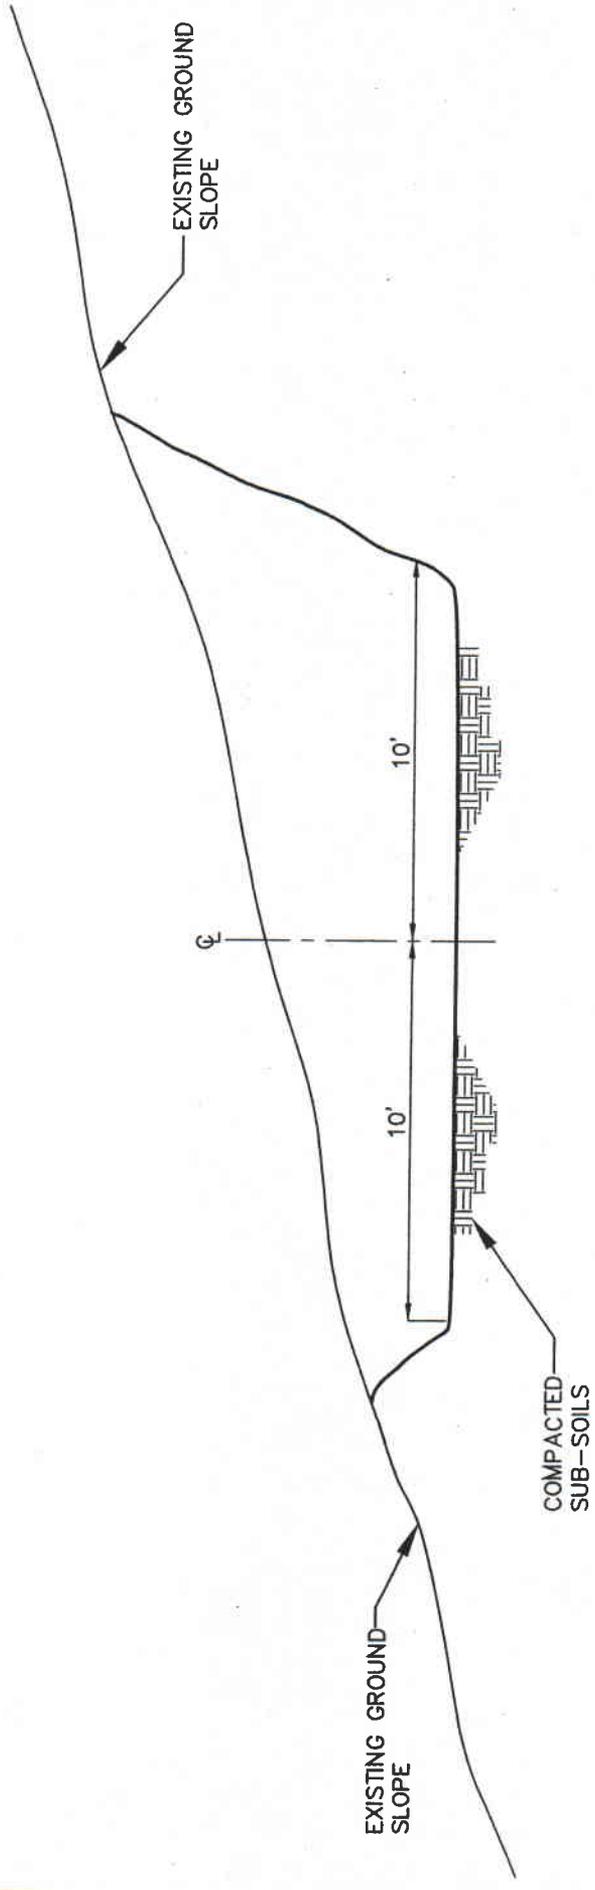

NOTE:
 THE ACCESS ROAD IS BELOW THE EXISTING SURFACE DUE TO TOPSOIL 7" - 30" DEEP BEING REMOVED AND STOCKPILED PRIOR TO FINAL ROAD GRADING.

NOT TO SCALE

FIGURE 5-14. TYPICAL ACCESS ROAD CROSS SECTION

TYPICAL WELL DESIGN

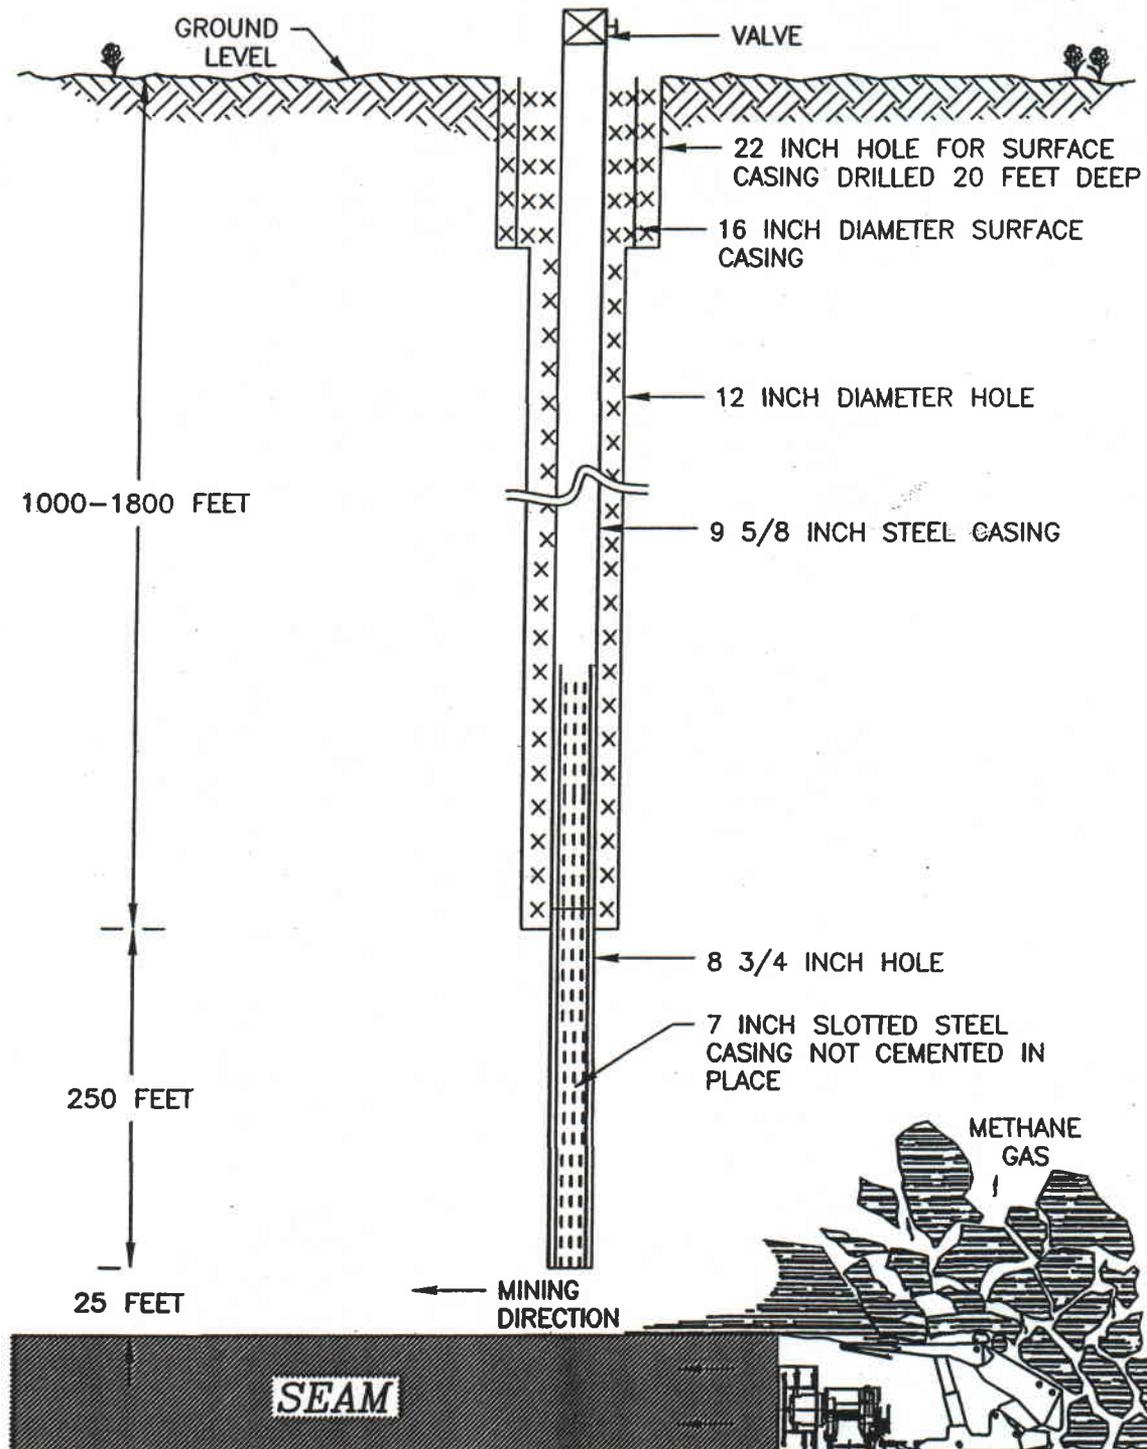


FIGURE 5-16. TYPICAL WELL DESIGN.

W.A. KOONTZ JAN 02


FIGURE 5-26
Reclamation Schedule - Wells G-3, G-4, G-6 thru G-17

Task	Weeks to Complete from Start of Reclamation Activities		
	1	2	3
Plug Well			
Regrade Site to Original Contour			
Rip Subsoil			
Place Topsoil and Roughen			
Seed and Mulch			
The schedule assumes that weather conditions are conducive. Schedule is for each individual well not wells collectively. If necessary the timing may be extended.			

Canyon Fuel Company, LLC
Dugout Canyon Mine




Methane Degassification Amendment
July 13, 2006 ~~March 16, 2006~~

ATTACHMENT 5-1
Degas Wells G-8 thru G-17

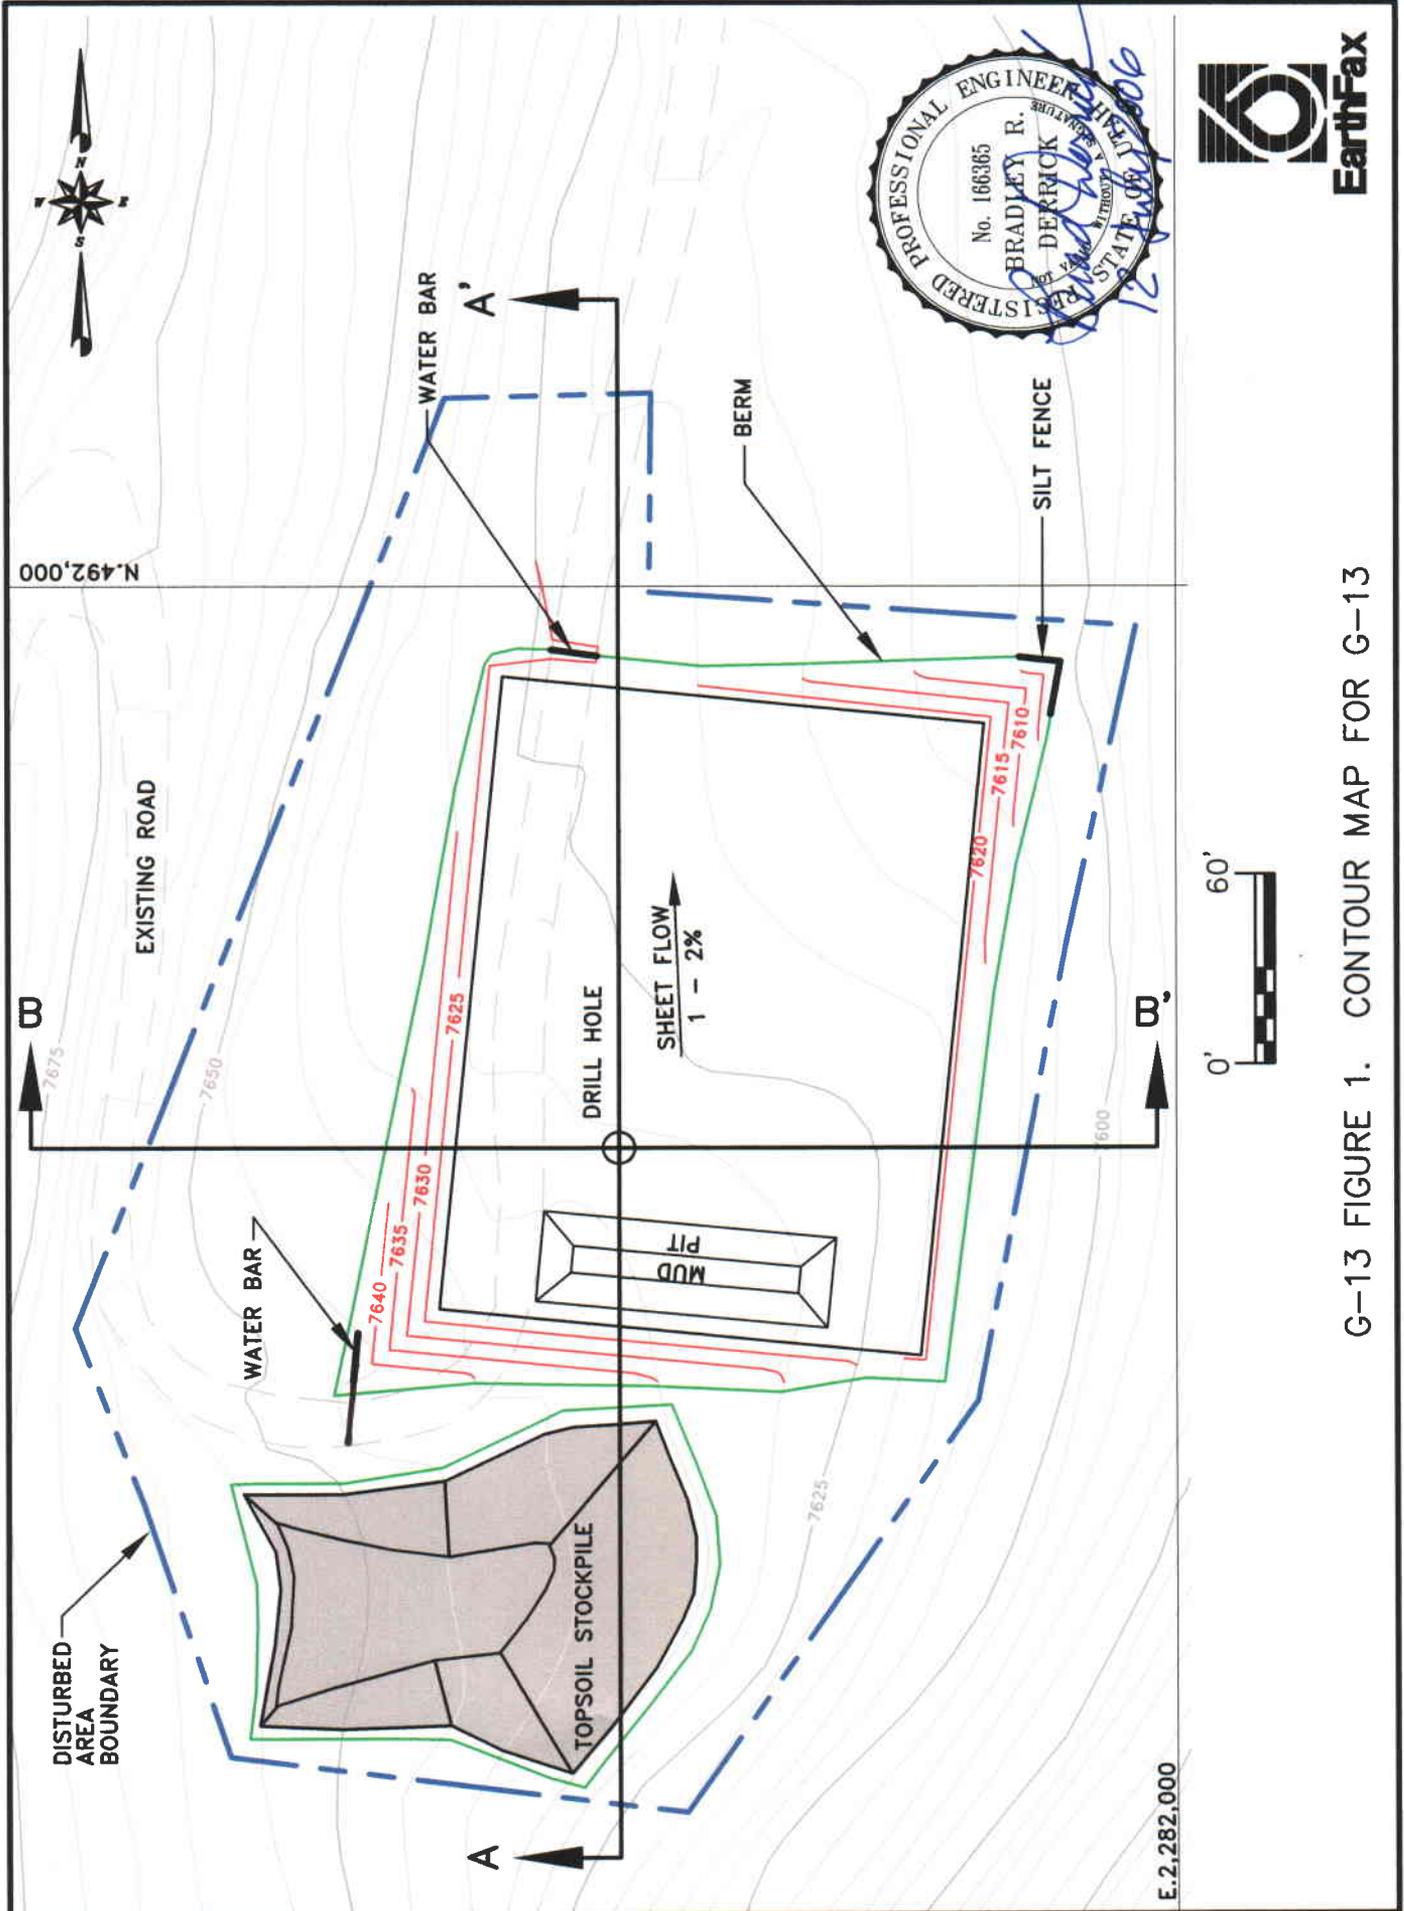


G-13 FIGURE 1. CONTOUR MAP FOR G-13



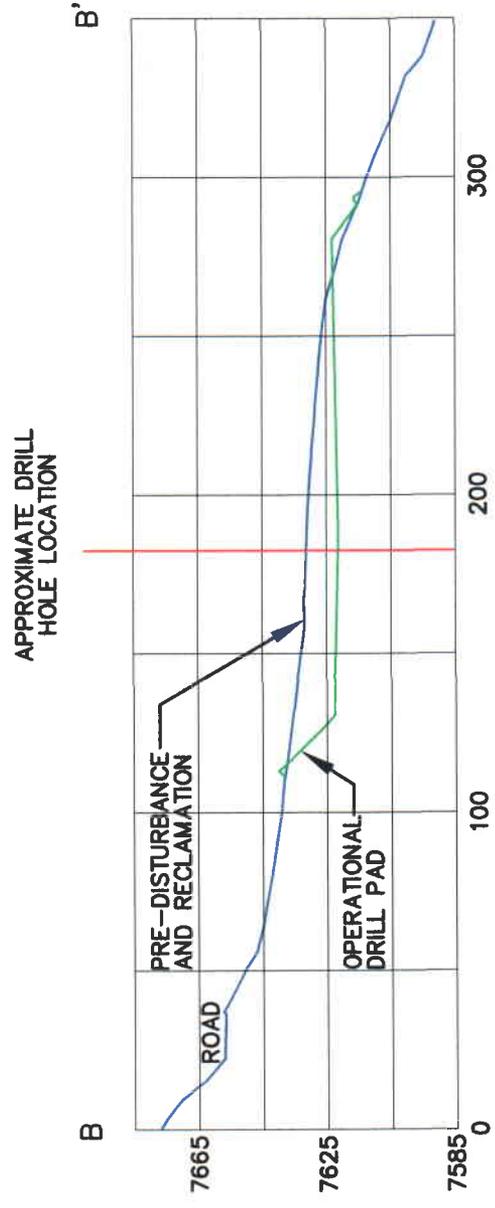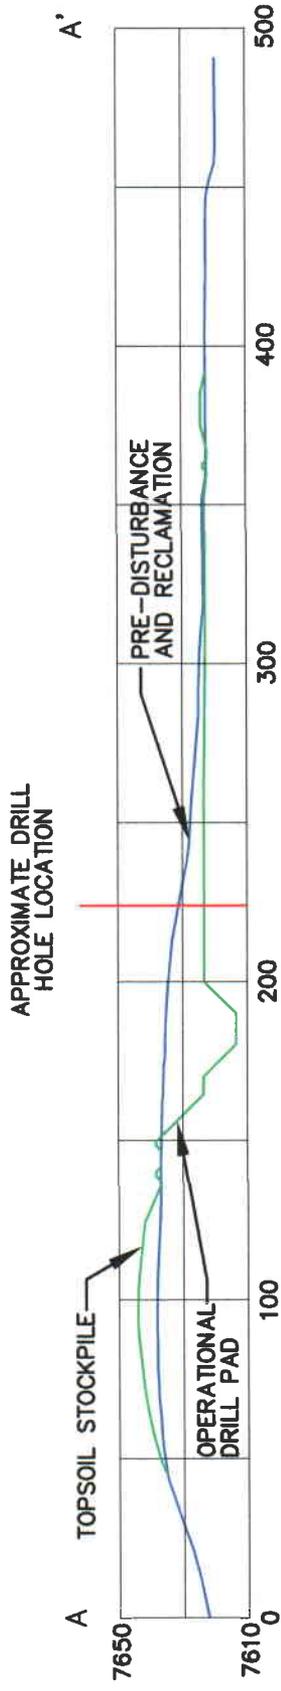


G-13 FIGURE 2. TYPICAL CROSS-SECTIONS FOR G-13

G-13 FIGURE 3. LAYOUT MAP FOR G-13

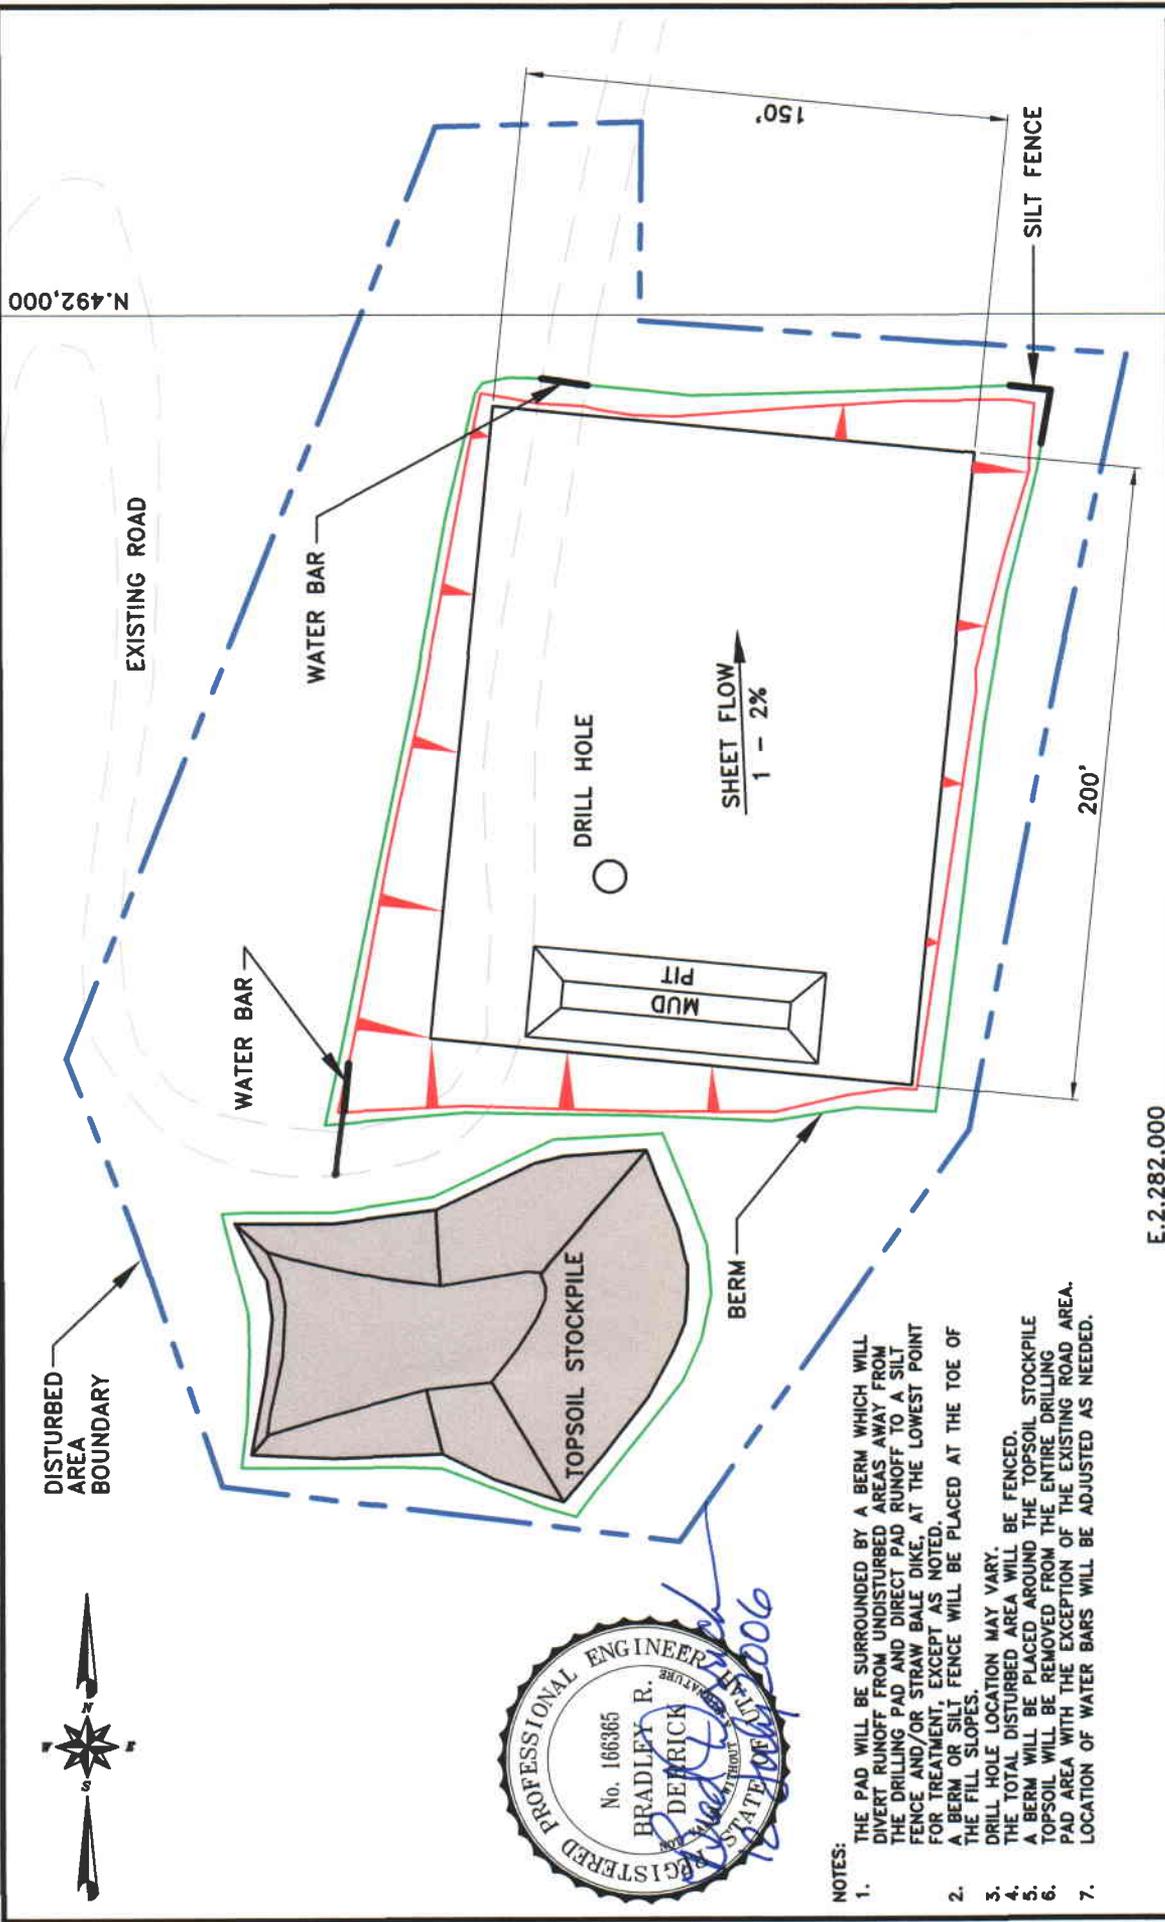

- NOTES:
1. THE PAD WILL BE SURROUNDED BY A BERM WHICH WILL DIVERT RUNOFF FROM UNDISTURBED AREAS AWAY FROM THE DRILLING PAD AND DIRECT PAD RUNOFF TO A SILT FENCE AND/OR STRAW BALE DIKE, AT THE LOWEST POINT FOR TREATMENT, EXCEPT AS NOTED.
 2. A BERM OR SILT FENCE WILL BE PLACED AT THE TOE OF THE FILL SLOPES.
 3. DRILL HOLE LOCATION MAY VARY.
 4. THE TOTAL DISTURBED AREA WILL BE FENCED.
 5. A BERM WILL BE PLACED AROUND THE TOPSOIL STOCKPILE.
 6. TOPSOIL WILL BE REMOVED FROM THE ENTIRE DRILLING PAD AREA WITH THE EXCEPTION OF THE EXISTING ROAD AREA.
 7. LOCATION OF WATER BARS WILL BE ADJUSTED AS NEEDED.

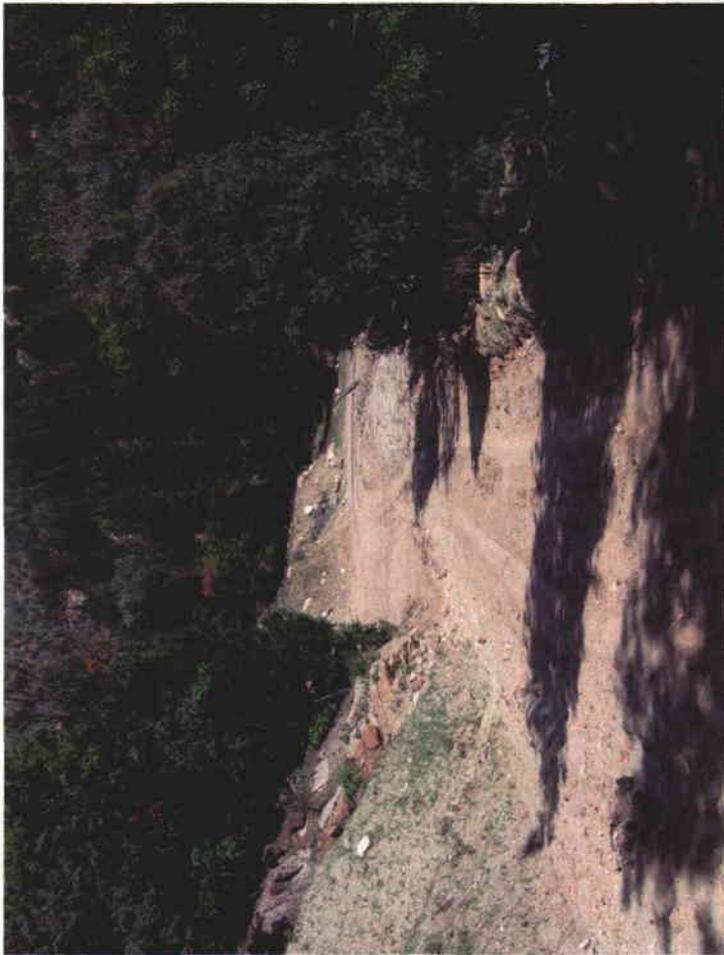

Existing Access Road at Proposed
Well Site G-15
<<<<<<



Existing Access Road at
Proposed Well Site G-14 >>>

Canyon Fuel Company, LLC
Dugout Canyon Mine

Methane Degassification Amendment
July 13, 2006 ~~March 16, 2006~~

CHAPTER 7
HYDROLOGY

TABLE OF CONTENTS

<u>Section</u>	<u>Page</u>
710 INTRODUCTION	7-1
711 General Requirements	7-1
712 Certification	7-1
713 Inspection	7-1
720 ENVIRONMENTAL DESCRIPTION	7-1
721 General Requirements	7-1
722 Cross Sections and Maps	7-2
722.100 Location and Extent of Subsurface Water	7-2
722.200 Location of Surface Water Bodies	7-2
722.300 Locations of Monitoring Stations	7-2
722.400 Locations and Depth of Water Wells	7-2
722.500 Surface Topography	7-2
723 Sampling and Analysis	7-3
724 Baseline Information	7-3
724.100 Groundwater Information	7-3
724.200 Surface Water Information	7-3
724.300 Geologic Information	7-3
724.400 Climatological Information	7-3
724.500 Supplemental Information	7-3
724.600 Survey of Renewable Resource Lands	7-4
724.700 Alluvial Valley Floor Requirements	7-4
725 Baseline Cumulative Impact Area Information	7-4

TABLE OF CONTENTS(Continued)

<u>Section</u>	<u>Page</u>
726 Modeling	7-4
727 Alternative Water Source Information	7-4
728 Probable Hydrologic Consequences	7-4
728.100 Potential Impacts of Surface and Groundwater	7-5
728.200 Baseline Hydrologic and Geologic Information	7-5
728.300 PHC Determination	7-5
729 Cumulative Hydrologic Impact Assessment (CHIA)	7-6
730 OPERATION PLAN	7-6
731 General Requirements	7-6
731.100 Hydrologic - Balance Protection	7-6
731.200 Water Monitoring	7-7
731.300 Acid or Toxic Forming Materials	7-7
731.400 Transfer of Wells	7-7
731.500 Discharge	7-7
731.600 Stream Buffer Zone	7-8
731.700 Cross Section and Maps	7-8
731.800 Water Rights and Replacement	7-8
732 Sediment Control Measures	7-8
732.100 Siltation Structures	7-8
732.200 Sedimentation Pond	7-9
732.300 Diversions	7-9
732.400 Road Drainage	7-9
733 Impoundments	7-9
733.100 General Plans	7-9
733.200 Permanent and Temporary Impoundments	7-9
734 Discharge Structures	7-10

TABLE OF CONTENTS(Continued)

<u>Section</u>	<u>Page</u>
735 Disposal of Excess Spoil	7-10
736 Coal Mine Waste	7-10
737 Non-Coal Mine Waste	7-10
738 Temporary Casing and Sealing of Wells	7-10
740 DESIGN CRITERIA AND PLANS	7-10
741 General Requirements	7-10
742 Sediment Control Measures	7-11
742.100 General Requirements	7-11
742.200 Siltation Structures	7-11
742.300 Diversions	7-11
742.400 Road Drainage	7-12
743 Impoundments	7-12
744 Discharge Structures	7-12
745 Disposal of Excess Spoil	7-12
746 Coal Mine Waste	7-12
746.100 General Requirements	7-12
746.200 Refuse Piles	7-12
746.300 Impounding Structures	7-12
746.400 Return of Coal Processing Waste to Abandoned Underground Workings	7-13
747 Disposal of Non-Coal Waste	7-13
748 Casing and Sealing Wells	7-13

TABLE OF CONTENTS(Continued)

<u>Section</u>	<u>Page</u>
750 PERFORMANCE STANDARDS	7-13
751 Water Quality Standards and Effluent Limitations	7-13
752 Sediment Control Measures	7-13
752.100 Siltation Structures and Diversions	7-14
752.200 Road Drainage	7-14
753 Impoundments and Discharge Structures	7-14
754 Disposal of Excess Spoil, Coal Mine Waste and Non-Coal Mine Waste . . .	7-14
755 Casing and Sealing	7-14
760 RECLAMATION	7-14
761 General Requirements	7-14
762 Roads	7-15
762.100 Restoring the Natural Drainage Patterns	7-15
762.200 Reshaping Cut and Fill Slopes	7-15
763 Siltation Structures	7-15
763.100 Maintenance of Siltation Structures	7-15
763.200 Removal of Siltation Structures	7-15
764 Structure Removal	7-15
765 Permanent Casing and Sealing of Wells	7-16

Canyon Fuel Company, LLC
Dugout Canyon Mine

Methane Degassification Amendment
July 13, 2006 ~~March 16, 2006~~

LIST OF ATTACHMENTS

Attachment 7-1 Hydrology Calculations

710 INTRODUCTION

711 General Requirements

This chapter presents a description of the following:

- Proposed operations and the potential impacts to the hydrologic balance;
- Methods of compliance with design criteria and the calculations utilized to show compliance; and
- Applicable hydrologic performance standards.

712 Certification

All maps, plans, and cross sections presented in this chapter have been certified by a qualified, registered professional engineer.

713 Inspection

Inspections are not required since no permanent impoundments will exist at the well sites.

720 ENVIRONMENTAL DESCRIPTION

721 General Requirements

The application will include a description of the existing premining hydrologic resources with the proposed permit and adjacent areas that may be affected or impacted by the proposed coal mining and reclamation operations.

722 Cross Sections and Maps

722.100 Location and Extent of Subsurface Water

Figure 7-1 in the approved M&RP shows a generalized hydrostratigraphic cross section of the permit and adjacent areas including the well sites. Section 724.100 of the approved M&RP provides baseline groundwater conditions.

722.200 Location of Surface Water Bodies

Plate 7-2 in the approved M&RP shows the locations of surface-water bodies and existing or pending water rights. Section 724.200 of the approved M&RP provides baseline surface water conditions.

722.300 Locations of Monitoring Stations

Plate 7-1 in the approved M&RP shows the location of surface water and groundwater monitoring stations.

722.400 Locations and Depth of Water Wells

Refer to Section 722.400 and Plate 7-1 of the approved M&RP for information pertaining to the groundwater monitoring wells. Refer to Appendix 7-9 of approved M&RP for details pertaining to the Gilson well.

722.500 Surface Topography

Surface topography features at the well sites and adjacent areas are shown on Figures 1-1, 5-1, 5-5, 5-9, 5-17, 5-20, 5-23, 5-27 and in Attachment 5-1 for Degas Wells G-8 thru G-17. Refer to Plate 1-4 in the M&RP for well locations.

723 Sampling and Analysis

Refer to Section 723 of the approved M&RP.

724 Baseline Information

Refer to Section 724 of the approved M&RP.

724.100 Groundwater Information

Refer to Section 724.100 of the approved M&RP.

724.200 Surface Water Information

Refer to Section 724.200 of the approved M&RP.

724.300 Geologic Information

Geologic information related to the well sites and adjacent areas is presented in Chapter 6 of this submittal and in the approved M&RP.

724.400 Climatological Information

Climatological data are summarized in Appendix 4-1 behind the Air Quality Permit of the approved M&RP and RA Attachment 7-5 of the Refuse Pile Amendment.

724.500 Supplemental Information

Refer to Section 724.500 of the approved M&RP.

724.600 Survey of Renewable Resource Lands

Refer to Section 724.600 of the approved M&RP.

724.700 Alluvial Valley Floor Requirements

Information regarding the presence or absence of alluvial valley floors in the well sites and adjacent areas is presented in Chapter 9 of this submittal and the approved M&RP.

725 Baseline Cumulative Impact Area Information

The CHIA currently in place for the Dugout Canyon Mine covers the well sites. The hydrologic and geologic information required for the Division to develop a Cumulative Hydrologic Impact Assessment (CHIA) is presented in the approved M&RP.

726 Modeling

No groundwater or surface water modeling was conducted in support of this submittal.

727 Alternative Water Source Information

Not applicable.

728 Probable Hydrologic Consequences

This section addresses the probable hydrologic consequences of construction and reclamation operations at the well sites. Mitigation measures are discussed generally in this section and in detail in Section 730 of the approved M&RP.

728.100 Potential Impacts of Surface and Groundwater

Potential impacts of the well sites in this area on the quality and quantity of surface and groundwater flow may include contamination from materials associated with the drilling of the wells. **Once installed, the wells are designed as an ambient vent of methane gas, having no affect on the surface or groundwater.** The potential impact is addressed in Section 728.300 of this submittal and the approved M&RP.

728.200 Baseline Hydrologic and Geologic Information

Baseline geologic information is presented in Chapter 6 of the approved M&RP. Baseline hydrologic information is presented in Section 724.100 and 724.200 of the approved M&RP.

728.300 PHC Determination

Potential Impacts to the Hydrologic Balance - Potential impacts of the Dugout Canyon Mine on the hydrologic balance of the well sites and adjacent areas are addressed in the subsections of this submittal and the approved M&RP. **The PHC prepared by Mayo and Associates for the Dugout Canyon Mine is located in Appendix 7-3, Section 3 , of the approved M&RP. Refer to Chapter 3,**

Section 322.200 for information addressing water usage for degas well drilling, as well as mining. Little to no impacts to the Hydrologic Balance are anticipated since 1) the potential impacts are limited to the drilling and construction of the wells; 2) BTCA techniques for sediment control are implemented for the surface disturbance of the well pad; 3) hydrogeologic information from in-mine observations, Degas wells G-1 through G-9, and PHC information included in the approved M&RP support that minimal groundwater is encountered in the geologic formations being drilled; and 4) any water encountered during drilling and construction of the well will need to be sealed for the well to function as an ambient vent of methane gas.

Acid and Toxic Forming Materials - No acid or toxic forming materials have been identified in the soils or strata of the Dugout Canyon Mine (Chapter 6, Section 623 of this submittal). Additional information is located in Appendix 6-2 of the approved M&RP.

Groundwater - ~~When encountered~~ during drilling ~~the groundwater encountered will be affected~~ groundwater aquifers ~~encountered~~ will be sealed using drilling mud. ~~At completion, the casing will be grouted and cement placed inside the well casing during reclamation.~~ ~~will be used to seal the groundwater aquifers.~~

Once drilling is completed, the casing ~~is~~ will be grouted in the well hole, ~~This will~~ sealing aquifers to prevent groundwater migration, including groundwater from migrating down the outside of the casing into the mine. Should water inflow greater than 15 gallon per minute be encountered during the drilling of the degas wells the depth and volume will be recorded and included in Attachment 7-1. ~~No measurable inflows of water have been encountered during the drilling of degas wells G-1 thru G-9.~~

The development and construction of degas wells does not have the potential to decrease creek flow or spring discharges, the wells are not designed to capture water, dewater aquifers or cause subsidence. Methane gas, not liquid (water) is pumped from the wells following construction.

Surface Water - Degas wells are not used to access water to be discharged to the surface. As mentioned above, no measureable water has been encountered during the drilling, construction and operation of degas wells G-1 thru G-9. Also, the well cannot function as a degas well if significant water is encountered, and will need to be abandoned.

Potential Hydrocarbon Contamination - Hydrocarbon products will not be stored at the well sites, however fuels, greases, and other oils may leak from equipment during drilling operations. Absorbent materials will be used for the collection of leaked fuels, greases, and other oils. The saturated absorbent materials will be disposed of at an appropriate landfill facility.

729 Cumulative Hydrologic Impact Assessment (CHIA)

The Cumulative Hydrologic Impact Assessment currently in place for the Dugout Canyon Mine includes the well sites and adjacent areas.

730 OPERATION PLAN

731 General Requirements

731.100 Hydrologic - Balance Protection

Groundwater Protection - The effect on groundwater at the well sites is expected to be minimal. Groundwater encountered during drilling will be sealed off, refer to Section 728.300.

Surface Water Protection - To protect the hydrologic balance, construction, maintenance, and reclamation operations will be conducted to handle earth materials and runoff in a manner that prevents, to the extent possible, additional contributions of suspended solids to stream flow outside the permit area, and otherwise prevent water pollution.

During initial drilling, the sites will be graded to ensure that storm runoff will flow towards the berms surrounding the drilling pad area. The berms will direct the runoff to the lowest point(s) within the pad area where a silt fence and/or straw bale dike(s) will treat the runoff (see Figures 5-1, 5-5, 5-9, 5-17, 5-20, 5-23, 5-27 and Attachment 5-1). The berm placed at the top of the drilling pad cut slopes will divert runoff around the drilling pad. Thus reducing the runoff affected by the drilling pad.

The pad will be re-graded to cause the storm runoff to sheet flow towards a silt fence and/or straw bale dike. A berm will be placed at the top of the fill slope to direct any runoff from the operational pad to the silt fence and/or straw bale dike(see Figures 5-4, 5-8, 5-12, 5-19, 5-22, 5-25, 5-29 and Attachment 5-1). The silt fences and/or straw bale dikes will be periodically inspected, and accumulated sediment will be removed as needed to maintain functionality. The sediment from the silt fence and/or straw bale dikes will be piled on the pad and will be used for fill during final reclamation of the well site. During the drilling phase a berm and silt fence will be installed at the toe of the fill slope as shown on Figures 5-1, 5-5, 5-9, 5-17, 5-20, 5-23, 5-27 and Attachment 5-1 to treat any runoff from the drilling pad.

731.200 Water Monitoring

No water monitoring will be conducted at the degas well sites. Refer to approved M&RP for a description of water monitoring.

731.300 Acid or Toxic Forming Materials

No acid or toxic forming materials are anticipated at the well sites (see Section 728.300).

731.400 Transfer of Wells

Refer to Section 731.400 of the approved M&RP.

731.500 Discharge

No discharges to underground workings.

731.600 Stream Buffer Zones

Stream Channel Diversions - No stream channel diversions are planned at the well sites.

Buffer Zone Designation - When drilling sites are adjacent to a perennial or **an intermittent** stream, a stream buffer zone will be established. **Well sites G-11, G-12 and G-15 require buffer zone designation. Refer to Chapter 5, Attachment 5-1 for drawings of well sites G-8 through G-17.**

731.700 Cross Section and Maps

Not applicable.

731.800 Water Rights and Replacement

Refer to Sections 728.300 and 731.800 of the approved M&RP.

732 Sediment Control Measures

The sediment control measures within the well sites have been designed to prevent additional contributions of sediment to stream flow or to runoff outside the well sites. In addition, the well sites have been designed to minimize erosion to the extent possible.

The structures to be used for runoff control at the well sites are berms, silt fences and/or straw bale dikes.

732.100 Siltation Structures

Berms, silt fences and straw bales dikes will be used to treat runoff.

732.200 Sedimentation Pond

The drilling sites will not have sedimentation ponds.

732.300 Diversions

Refer to Section 731.100 of this submittal.

732.400 Road Drainage

No diversion ditches will be constructed along the primary roads leading to the well sites. See Figures 5-13 and 5-14 for typical road cross sections. Where needed roads accessing the drill sites will have a water bar constructed at the base of the road to divert water off the road prior to the runoff reaching the drilling pad.

The incised road to well site G-16 will be constructed as shown on Figure 5-14 in the approved permit, water bars will be used to direct flow off the road and either silt fences or strawbales will be used to treat runoff. Refer to Chapter 5, Attachment 5-1 for drawings of well site G-16 showing the location of a single water bar, additional water bar(s) will be constructed as required to direct water from the road. Refer to Section 527.200 for road construction information.

Subsoil being cut in order to construction the pad for well G-15 will be placed on the existing road, causing it to be elevated, no new access road will be constructed to well site G-15.

733 Impoundments

733.100 General Plans

Not applicable.

733.200 Permanent and Temporary Impoundments

No permanent impoundments will exist at the well sites.

734 Discharge Structures

A berm will surround the entire drill pad at each well site during the drilling phase (excepted as noted). The berm will divert undisturbed runoff around the drilling pad and direct runoff from the pad to a silt fence/straw bale dike at the lowest point within the well pad disturbed area. A silt fence and/or straw bale dike will be the discharge structure for each of the well sites during the operational phase.

735 Disposal of Excess Spoil

There will be no excess spoil generated at the well sites.

736 Coal Mine Waste

There will be no coal mine waste generated or stored at the well sites.

737 Non-Coal Mine Waste

There will be no non-coal mine waste disposed at the well sites.

738 Temporary Casing and Sealing of Wells

Refer to Section 542.700 of this submittal.

740 DESIGN CRITERIA AND PLANS

741 General Requirements

This submittal includes general well site plans that incorporate design criteria for the control of drainage.

742 Sediment Control Measures

742.100 General Requirements

Design - Sediment control measures have been formulated to prevent additional contributions of sediment to stream flow or to runoff outside the well site area; and minimize erosion to the extent possible.

Measures and Methods - Sediment control methods will include silt fences, berms, and straw bales to reduce runoff and trap sediment.

742.200 Siltation Structures

General Requirements - Additional contributions of suspended solids and sediment or runoff outside the well site area, **including access roads** will be prevented to the extent possible using silt fences, berms, and straw bale dikes. Construction activities will not occur during major precipitation events. **As required, siltation structures will be installed prior to beginning site construction.**

Design - All hydrology calculations were made using the 10-year, 24-hour precipitation event. Hydrology calculations are in Attachment 7-1. Locations of the berms and silt fences are shown on Figures 5-1, 5-4, 5-5, 5-8, 5-9, 5-12, 5-17, 5-20, 5-23, 5-27 and Attachment 5-1.

742.300 Diversions

No diversion ditches will be constructed as part of the drilling or operational phases.

742.400 Road Drainage

Refer to Section 732.400 of this submittal. The road design for G-16 is shown on drawings located in Chapter 5, Attachment 5-1 and Figure 5-16.

743 Impoundments

No impoundments will exist at the well sites.

744 Discharge Structures

No discharge structures have been planned or designed.

745 Disposal of Excess Spoil

There will be no excess spoil generated at the well sites.

746 Coal Mine Waste

746.100 General Requirements

There will be no coal mine waste used at the well sites.

746.200 Refuse Piles

There will be no refuse piles at the well sites.

746.300 Impounding Structures

Refer to Section 733.200 of this submittal.

746.400 Return of Coal Processing Waste to Abandoned Underground Workings

No coal processing waste will be generated at the well sites.

747 Disposal of Non-Coal Mine Waste

All non-coal mine waste will be disposed of at an approved landfill.

748 Casing and Sealing Wells

Refer to Section 542.700 of this submittal.

750 PERFORMANCE STANDARDS

751 Water Quality Standards and Effluent Limitations

Water encountered during drilling and runoff water will be treated using silt fence and/or straw bale dikes prior to leaving the site. Should it become necessary the water encountered during drilling will be pumped into a tank and hauled from the site for disposal at a licensed facility.

752 Sediment Control Measures

All sediment control measures will be located, maintained, constructed and reclaimed according to plans and designs presented in Section 732, 742, and 760 of this submittal.

752.100 Siltation Structures and Diversions

Siltation structures will be located, maintained, constructed and reclaimed according to plans and designs presented in Section 732, 742, and 763 of the submittal.

752.200 Road Drainage

Refer to Section 732.400 of this submittal.

753 Impoundments and Discharge Structures

Refer to Section 733.200 of this submittal.

754 Disposal of Excess Spoil, Coal Mine Waste and Non-Coal Mine Waste

There will be no excess spoil or coal mine waste generated at the well sites. Refer to Section 747 of this submittal regarding non-coal waste disposal.

755 Casing and Sealing

Refer to Section 542.700 of this submittal.

760 RECLAMATION

761 General Requirements

A detailed reclamation plan for the well sites is presented in Section 540. No structures will exist at the well sites.

762 Roads

Refer to Section 542.600.

762.100 Restoring the Natural Drainage Patterns

The natural drainage patterns will be restored after degassification is completed.

762.200 Reshaping Cut and Fill Slopes

Cut and fill slopes will be reshaped at the well sites.

763 Siltation Structures

763.100 Maintenance of Siltation Structures

All siltation structures will be maintained until removed in accordance with the approved reclamation plan.

763.200 Removal of Siltation Structures

When a siltation structure is removed, the land on which the siltation structure was located will be regraded and revegetated in accordance with the reclamation plan presented in Section 540.

764 Structure Removal

A timetable for the reclamation of the sites is presented in Figures 5-15 (G-2 and G-3) and 5-26 (G-4 thru G-17).

765 Permanent Casing and Sealing of Wells

Refer to Section 542.700 of this submittal.