

0023

Beaver Creek Coal Company
P. O. Box AU
Price, Utah 84501
Telephone 801 637-5050

To Joe L. E
Lynn,  Sandy
P.
File
ACT/007/022
Folder No. 3

March 4, 1983

Mr. James W. Smith, Jr.
Coordinator of Mined Land Development
Utah Division of Oil, Gas and Mining
4241 State Office Building
Salt Lake City, UT 84114

Re: CV Spur Drainage and Raw Coal Modification
Approved: 10/20/82 and 1/10/83
ACT/007/022

Dear Mr. Smith:

As per our discussion on March 2, 1983, I am enclosing three copies of the raw coal loading plan for CV Spur. This represents the final stage of the modification applied for on September 17, 1982, and approved with stipulations on October 20, 1982, with final approval on January 10, 1983.

This submittal describes the method to be employed to load the raw coal onto our existing unit-train loading system. It will consist of a crusher, short conveyor and discharge chute - all items are to be placed within the area covered by this modification.

If you have any questions, or need any further information, please let me know.

Respectfully,

BEAVER CREEK COAL COMPANY




Dan W. Guy
Manager of Permitting

DWG/mp
cc: R.D. Robison
S.M. Raymond
File #4-4-4-CV

RECEIVED
MAR 08 1983

DIVISION OF
OIL, GAS & MINING

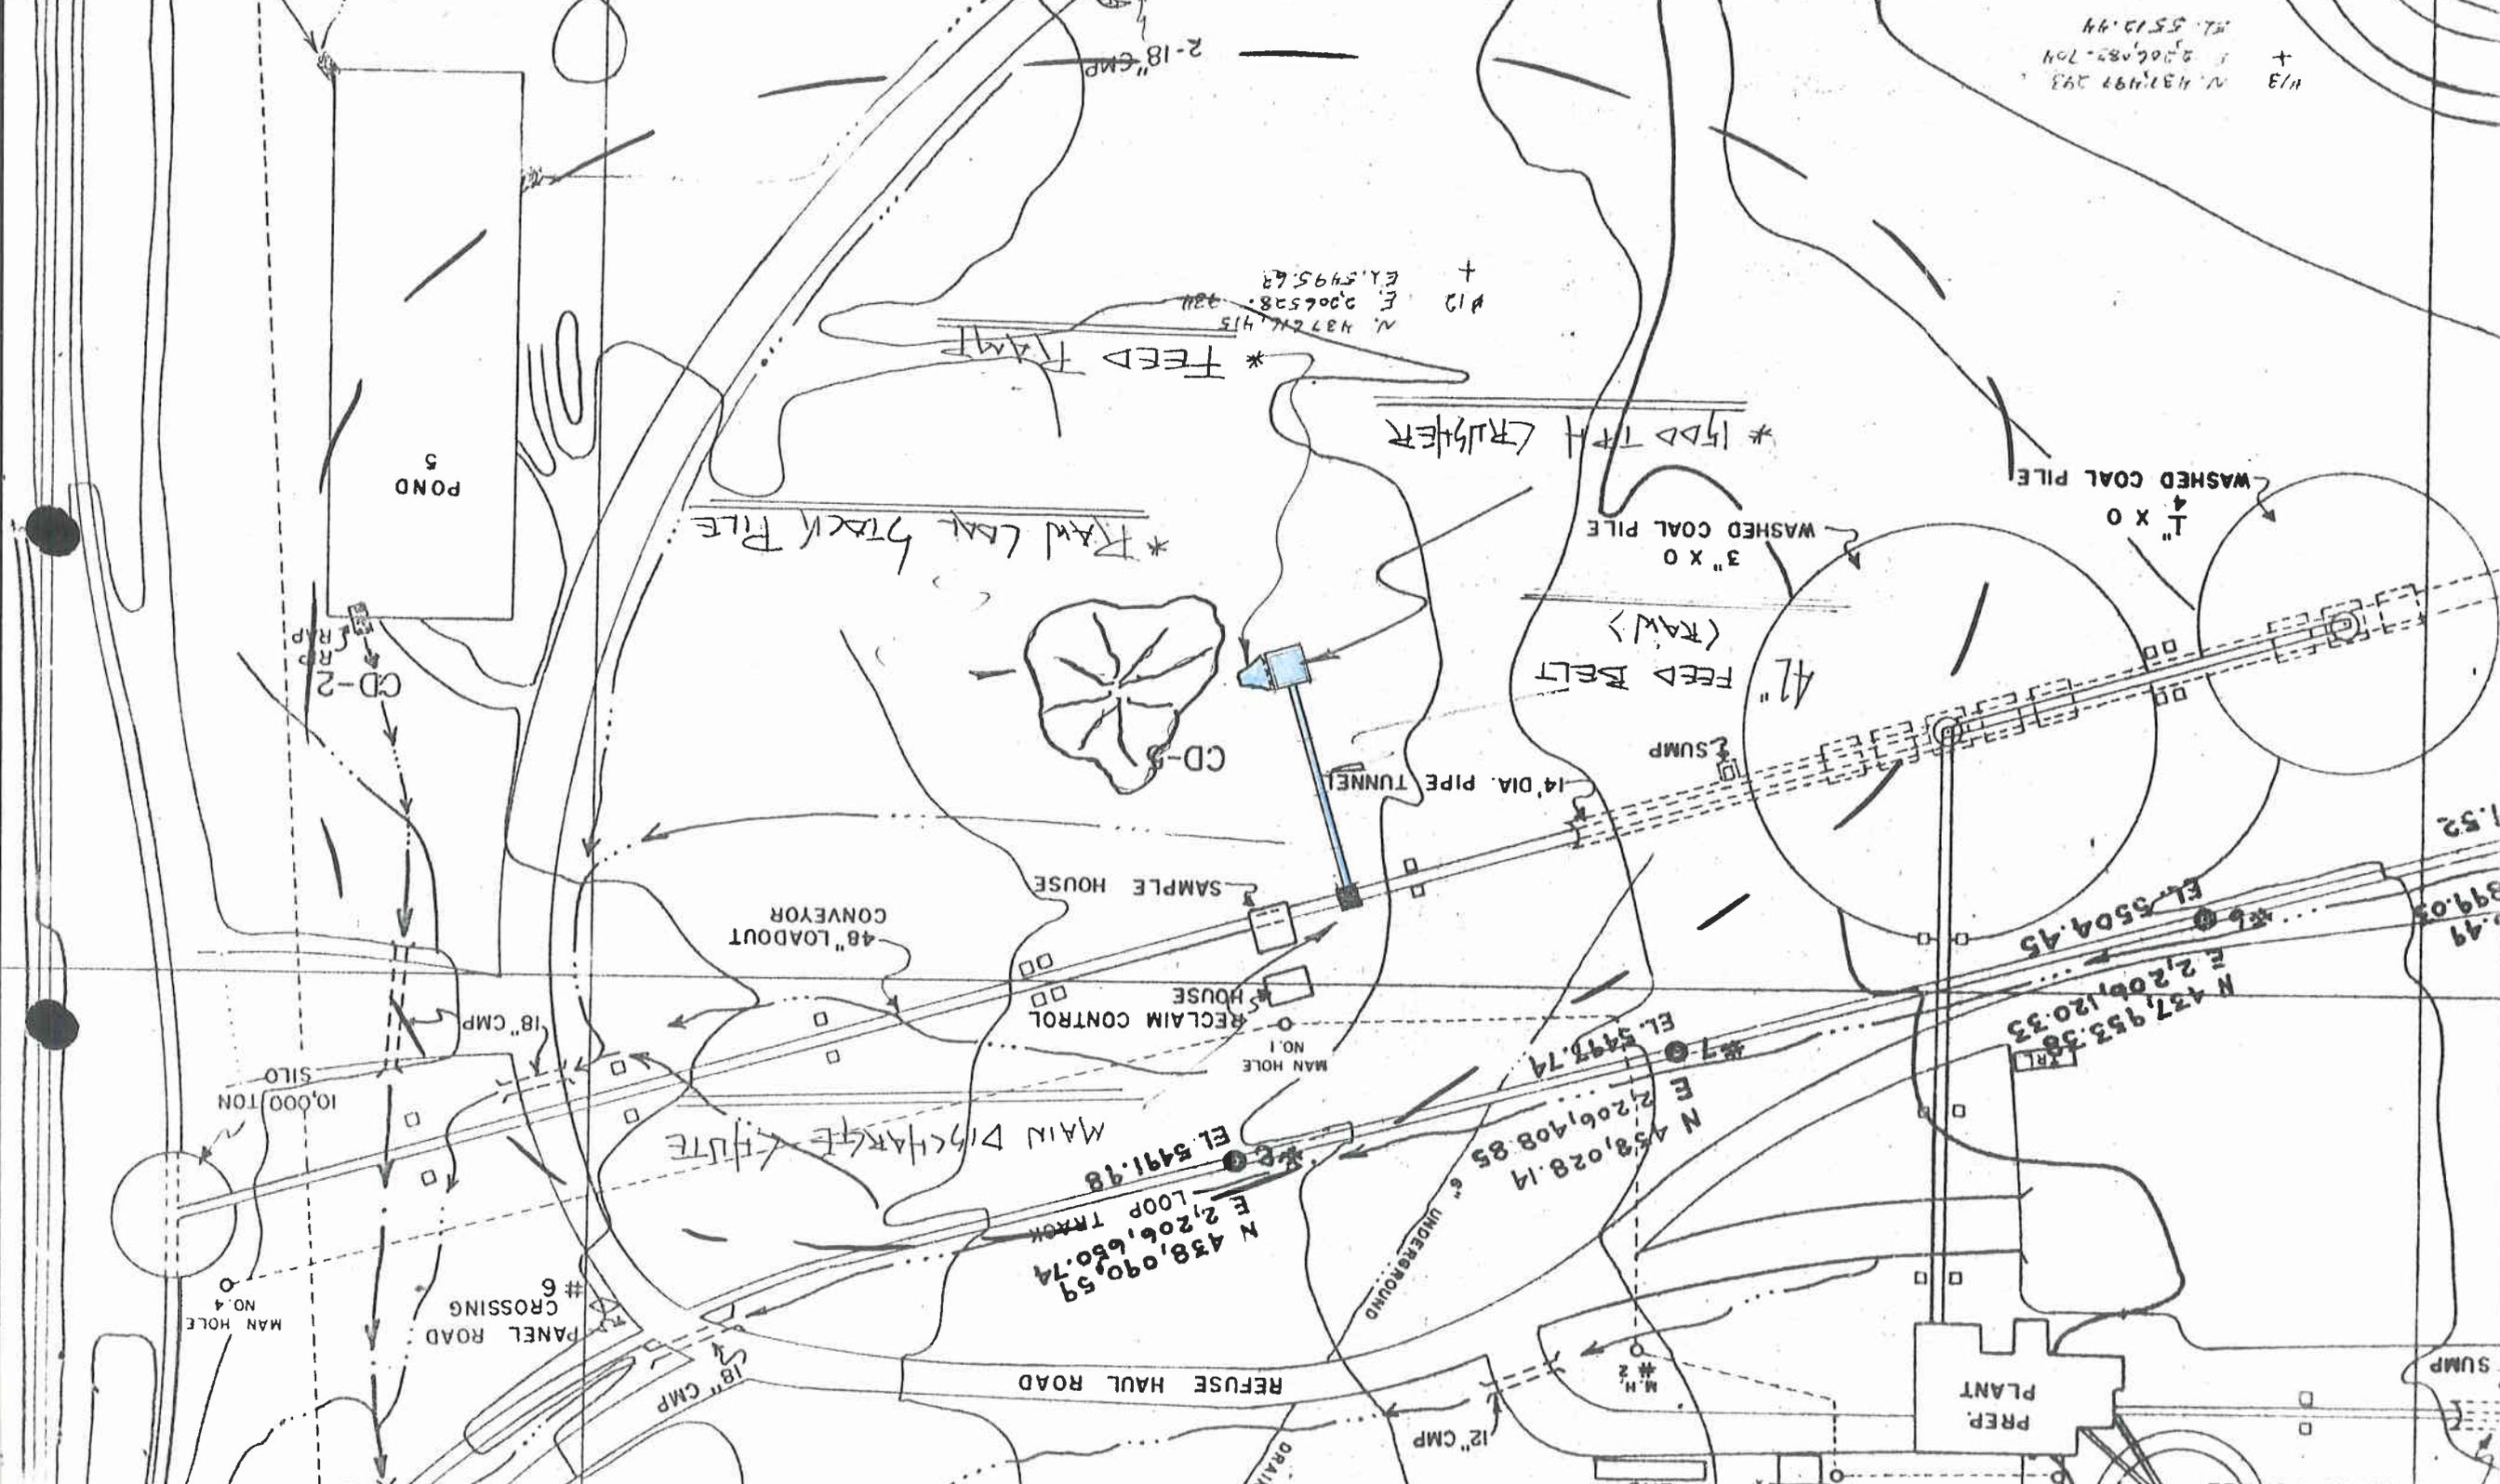

N 437,997.293
E 2,206,982.704
EL. 5512.44
+
N 1/3

N 437,915.415
E 2,006,528.321
EL. 5495.62
+
N 1/2

POND 5

CD-2
R.P.

CD-3

* Raw Coal Stock Pile

* FEED RAMP

* 1500 TPH CRUSHER

WASHED COAL PILE
3' X 0

WASHED COAL PILE
1' X 0

42" FEED BELT
(RAW)

SUMP

14' DIA. PIPE TUNNEL

48" LOADOUT CONVEYOR

SAMPLE HOUSE

RECLAIM CONTROL HOUSE

MAN HOLE NO. 1

MAIN DISCHARGE CHUTE

LOOP TRACK
E 2,206,160.74
N 438,090.59
EL. 5491.98

6" UNDERGROUND

N 458,028.14
E 2,206,1408.85
EL. 5491.74

N 437,953.38
E 2,206,120.33
EL. 5504.45

10,000 TON SILO

PANEL ROAD #6 CROSSING

MAN HOLE NO. 4

REFUSE HAUL ROAD

18" CMP

12" CMP

PREP. PLANT

SUMP