

TRANSACTION REPORT

0014

SEP-23-2002 MON 02:10 PM

FOR: OIL, GAS & MINING

801 359 3940

DATE	START	RECEIVER	TX TIME	PAGES	TYPE	NOTE	M#	DP
SEP-23	02:09 PM	9753331	56"	2	SEND	OK	950	

TOTAL : 56S PAGES: 2



State of Utah
 DEPARTMENT OF NATURAL RESOURCES
 DIVISION OF OIL, GAS AND MINING

Michael O. Leavitt
 Governor
 Robert L. Morgan
 Executive Director
 Lowell P. Braxton
 Division Director

1594 West North Temple, Suite 1210
 PO Box 145801
 Salt Lake City, Utah 84114-5801
 (801) 538-5340 telephone
 (801) 359-3940 fax
 (801) 538-7223 TTY
 www.nr.utah.gov

Handwritten notes:
 [Signature]
 [Signature] OK
 c/10/15/015 outgoing

**DIVISION OF OIL, GAS AND MINING
 FACSIMILE COVER SHEET**

DATE: September 23, 2002

FAX #: 975-3331

ATTN: Larry England

COMPANY: USFWS

DEPARTMENT: _____

NUMBER OF PAGES: (INCLUDING THIS ONE) 2

FROM: Dan GRUBBIGH - 117716



State of Utah
 DEPARTMENT OF NATURAL RESOURCES
 DIVISION OF OIL, GAS AND MINING

1594 West North Temple, Suite 1210
 PO Box 145801
 Salt Lake City, Utah 84114-5801
 (801) 538-5340 telephone
 (801) 359-3940 fax
 (801) 538-7223 TTY
 www.nr.utah.gov

Michael O. Leavitt
 Governor
 Robert L. Morgan
 Executive Director
 Lowell P. Braxton
 Division Director

**DIVISION OF OIL, GAS AND MINING
 FACSIMILE COVER SHEET**


DATE: September 23, 2002
 FAX #: 975-3331
 ATTN: Larry England
 COMPANY: USFWS
 DEPARTMENT: _____
 NUMBER OF PAGES: (INCLUDING THIS ONE) 2
 FROM: DM GRUBAUGH - LITTING

If you do not receive all of the pages, or if they are illegible, please call (801)538-5340. We are sending from a Sharp facsimile machine. Our telecopier number is (801)359-3940.

MESSAGE: Larry, Susan White asked me to fax this to you. Here's a map of the Energy Deep Mine area. She said that you could go out there tomorrow. Any questions, please call me @ 538-5268. Thank You!
DM

Important: This message is intended for the use of the individual or entity of which it is addressed and may contain information that is privileged, confidential and exempt from disclosure under applicable law. If the reader of this message is not the intended recipient, you are hereby notified that any dissemination, distribution, or copying of this communication is strictly prohibited. If you have received this communication in error, please notify us immediately by telephone and return this original message to us at the above address via regular postal service. Thank you.

Highway 10

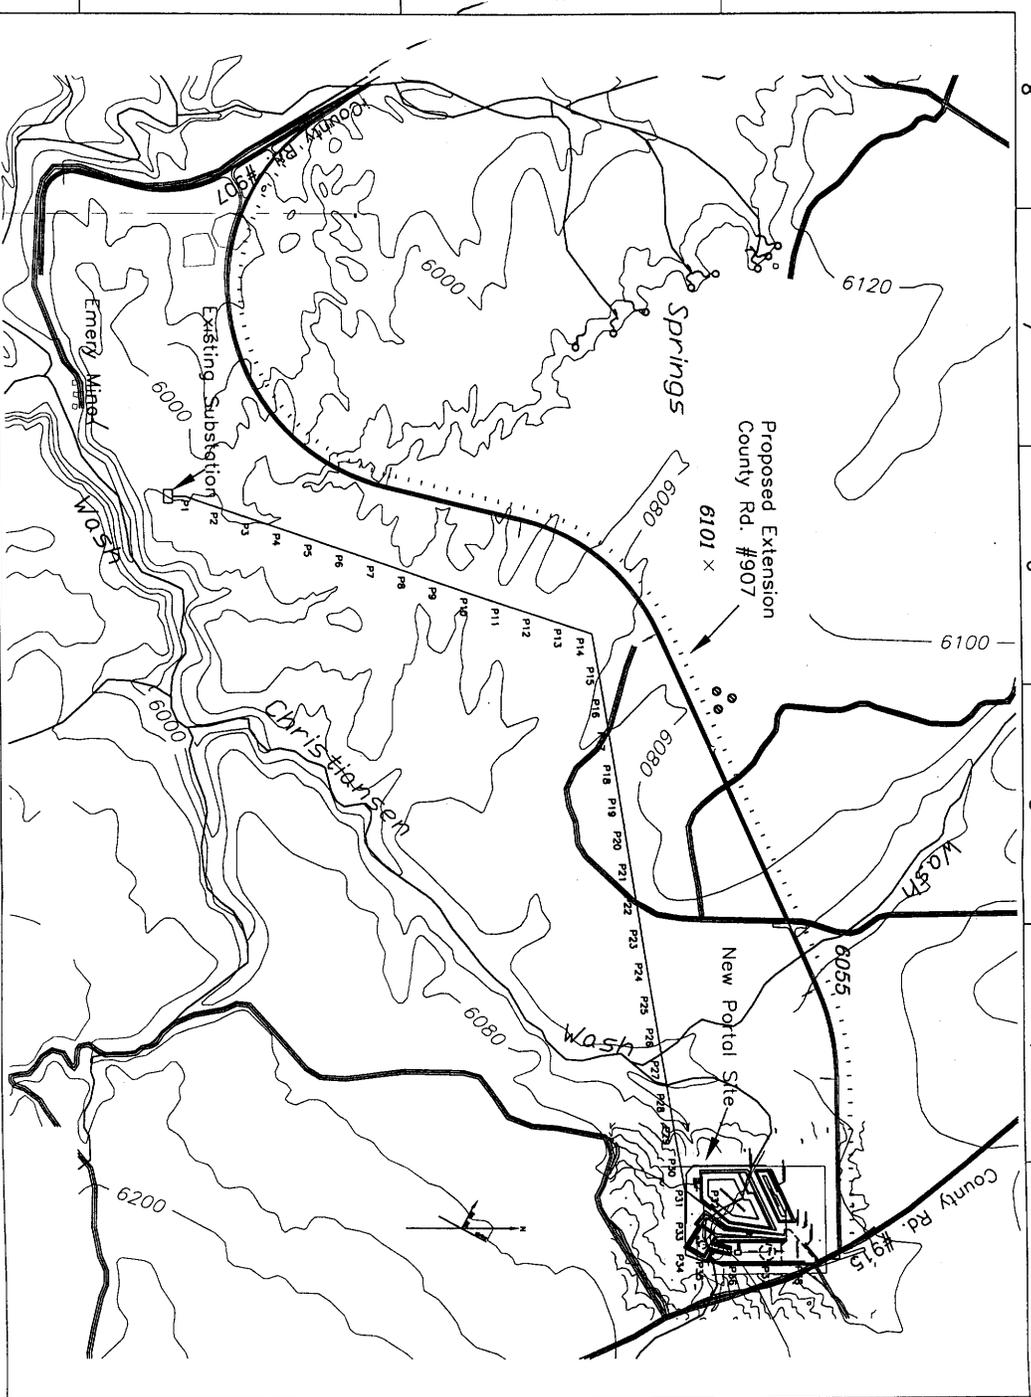

OVERHEAD POWER LINE PLAN VIEW
SCALE: 1" = 250'



APPROVED FOR BIDDING

REVISIONS

NO.	DATE	DESCRIPTION
1	05/20/72	AS SHOWN

CONSOLIDATION COAL COMPANY
EMERY MINE

REGISTERED PROFESSIONAL ENGINEER
ARTHUR D. BRUNO
STATE OF UTAH

6/13/72
PLATE II-3

- NOTES:
- THE DISTANCES AND POLE LOCATIONS AS SHOWN ON THIS PLAN VIEW ARE APPROXIMATE; THE FINAL LOCATIONS OF THE POLES ARE TO BE DETERMINED JOINTLY BY THE CONTRACTOR AND OWNER.
 - THE SPACING BETWEEN POLES SHALL NOT EXCEED 250 FEET.
 - OVER NON-TRAFFIC AREAS A MINIMUM OF 20'-0" IS TO BE MAINTAINED FROM THE LOWEST CONDUCTOR TO GROUND.
 - WHERE THE CONDUCTORS PASS OVER A ROADWAY OR TRAFFIC AREA THE MINIMUM DISTANCE OF 20'-0" FROM THE LOWEST CONDUCTOR TO THE ROADWAY IS TO BE MAINTAINED.
 - EACH POLE SHALL BE PROVIDED WITH A MINIMUM #6 AWG SOLID GROUND CONDUCTOR THAT EXTENDS THE ENTIRE LENGTH OF EACH POLE. GROUNDING SHALL ALSO BE CONNECTED TO THE TOP GROUND/STATIC CONDUCTOR AND METAL HARDWARE ON THE POLE.
 - LIGHTNING ARRESTERS SHALL NOT BE GROUND TO THE ISOLATED WIRE GROUND CONDUCTOR.
 - RAILOR PROTECTION DEVICE.
 - CABLES ARE ATTACHED OR LASHED TO A 3/8" STAINLESS STEEL MESSENGER CABLE.
 - ALL BOLTS SHALL BE A MINIMUM OF 45" IN LENGTH LONGER THAN THE CABLES TO BE USED AS NECESSARY TO MAINTAIN VERTICAL CLEARANCE.
 - POLES SHALL BE CLASS 3 OR BETTER WOOD POLES.
 - MINIMUM SETTING DEPTHS FOR POLES SHALL BE AS FOLLOWS:

POLE LENGTH (FEET)	SETTING DEPTH (FEET)
45'	6.5'
50'	7'
55'	7.5'
60'	8'

12. SEE DRAWING E200 FOR POWER POLE CONSTRUCTION DETAILS.

0

2

1