


DEER CREEK WASTE ROCK STORAGE FACILITY

Sept. 1988

STATE DECISION PACKAGE

DEER CREEK WASTE ROCK
STORAGE FACILITY
UTAH POWER AND LIGHT COMPANY

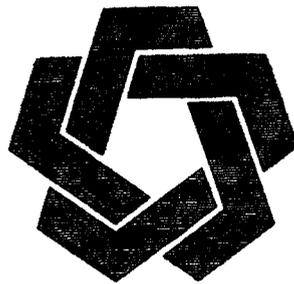

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS & MINING

SEPTEMBER 1988



State of Utah
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Norman H. Bangarter
Governor
Dee C. Hansen
Executive Director
Dianne R. Nielson, Ph.D.
Division Director

355 West North Temple
3 Triad Center, Suite 350
Salt Lake City, Utah 84180-1203
801-538-5340

September 13, 1988

Mr. J. Brett Harvey
Vice President & General Manager
Mining Division
Utah Power and Light Company
1707 West North Temple
Salt Lake City, Utah 84116

Dear Mr. Harvey:

Re: State Permit and Decision Package, Utah Power and Light Company,
Deer Creek Mine Waste Rock Disposal Site, ACT/015/018, Folder
No. 3, Emery County, Utah

Enclosed is a revised permanent program mining permit for the Deer Creek Mine, which includes the new waste rock disposal site. Two copies of the permit are included. Please read the stipulations in Attachment A, then sign both copies of the permit and return one to the Division.

Please note that the revised language negotiated between the Division, UP&L, and OSM has been utilized for OSM Condition Number 6, regarding water replacement. Additionally, the revised permit will still expire on the original permit expiration date, February 7, 1991.

A copy of the state's Decision Document and Technical Analysis for the waste rock disposal site is included for your records.

The cooperation of your staff during the permitting process has been much appreciated. Please convey my thanks particularly to Dave Smaldone, whose efforts allowed the permitting of the waste rock site to proceed in record time.

Best regards,


Dianne R. Nielson
Director

JJW/djh
Enclosures
cc: P. Rutledge, OSM
R. Hagen, OSM
WP+12:21

UTAH DIVISION OF OIL, GAS AND MINING
STATE DECISION DOCUMENT AND
TECHNICAL ANALYSIS

Utah Power and Light Company
Deer Creek Mine
Waste Rock Disposal Site
ACT/015/018
Emery County, Utah

September 13, 1988

CONTENTS

- * Administrative Overview
- * Location Map
- * Permitting Chronology
- * Mine Plan Information Form
- * Findings
- * State Permit With Stipulations
- * Technical Analysis
- * Cumulative Hydrologic Impact Assessment (CHIA)
- * Letters of Concurrence
 - Division of State History, May 5, 1988
 - Division of Wildlife Resources, June 10, 1988
 - Resource Development and Coordinating Committee
July 29, 1988
 - Bureau of Water Pollution Control Construction
Permit, July 28, 1988
 - Memo from Joe Helfrich (510[c]), August 25, 1988
 - Division of Water Rights, August 31, 1988
 - Southeastern Utah Association of Local Governments,
August 24, 1988
- * Affidavit of Publication

WP+/12:20

ADMINISTRATIVE OVERVIEW
UTAH POWER AND LIGHT COMPANY
DEER CREEK MINE
WASTE ROCK DISPOSAL SITE
ACT/015/018

Emery County, Utah
September 13, 1988

BACKGROUND

The Deer Creek Mine is an on-going Utah Power and Light Company (UP&L) operation providing steam coal in a mine mouth/power plant situation for the Huntington Power Plant in Emery County, Utah. Due to recent MSHA changes regarding underground storage of waste rock and geologic features encountered underground, the original Deer Creek waste rock storage facility, located on the mine site has been filled to capacity.

Utah Power and Light Company submitted a Permit Application Package (PAP) on April 13, 1988, for a site located some three miles east-northeast from the mine on a 46 acre parcel of UP&L land.

The site will receive a projected 31,200 cubic yards (cy) of waste material annually, consisting of waste rock, sediment pond cleanout material, and trommel rejects. The expected life of the facility is 40 plus years.

Reclamation of the site will occur in phases similar to contemporaneous reclamation in a surface mine set up.

COORDINATION WITH EXISTING PERMIT



Upon approval, a revised permit for the Deer Creek Mine incorporating the waste rock site will be issued to UP&L. The original five-year permit term expiring in February 1991 will still be in effect.

The permit will contain no conditions from the waste rock site permitting effort, but will include five (5) conditions (No.'s 1-5) from the OSM permit issued in October 1985, and two (2) conditions (No.'s 6 and 7) from the companion state permit issued in December 1985.

It should be noted that OSM Condition #6 (water replacement) incorporates revised language which has been arrived at based on negotiations between the Division, OSM and UP&L.

RECOMMENDATION FOR APPROVAL

Approval of the revised five-year permit is recommended, based on the approved waste rock permit application package as updated through September 12, 1988.

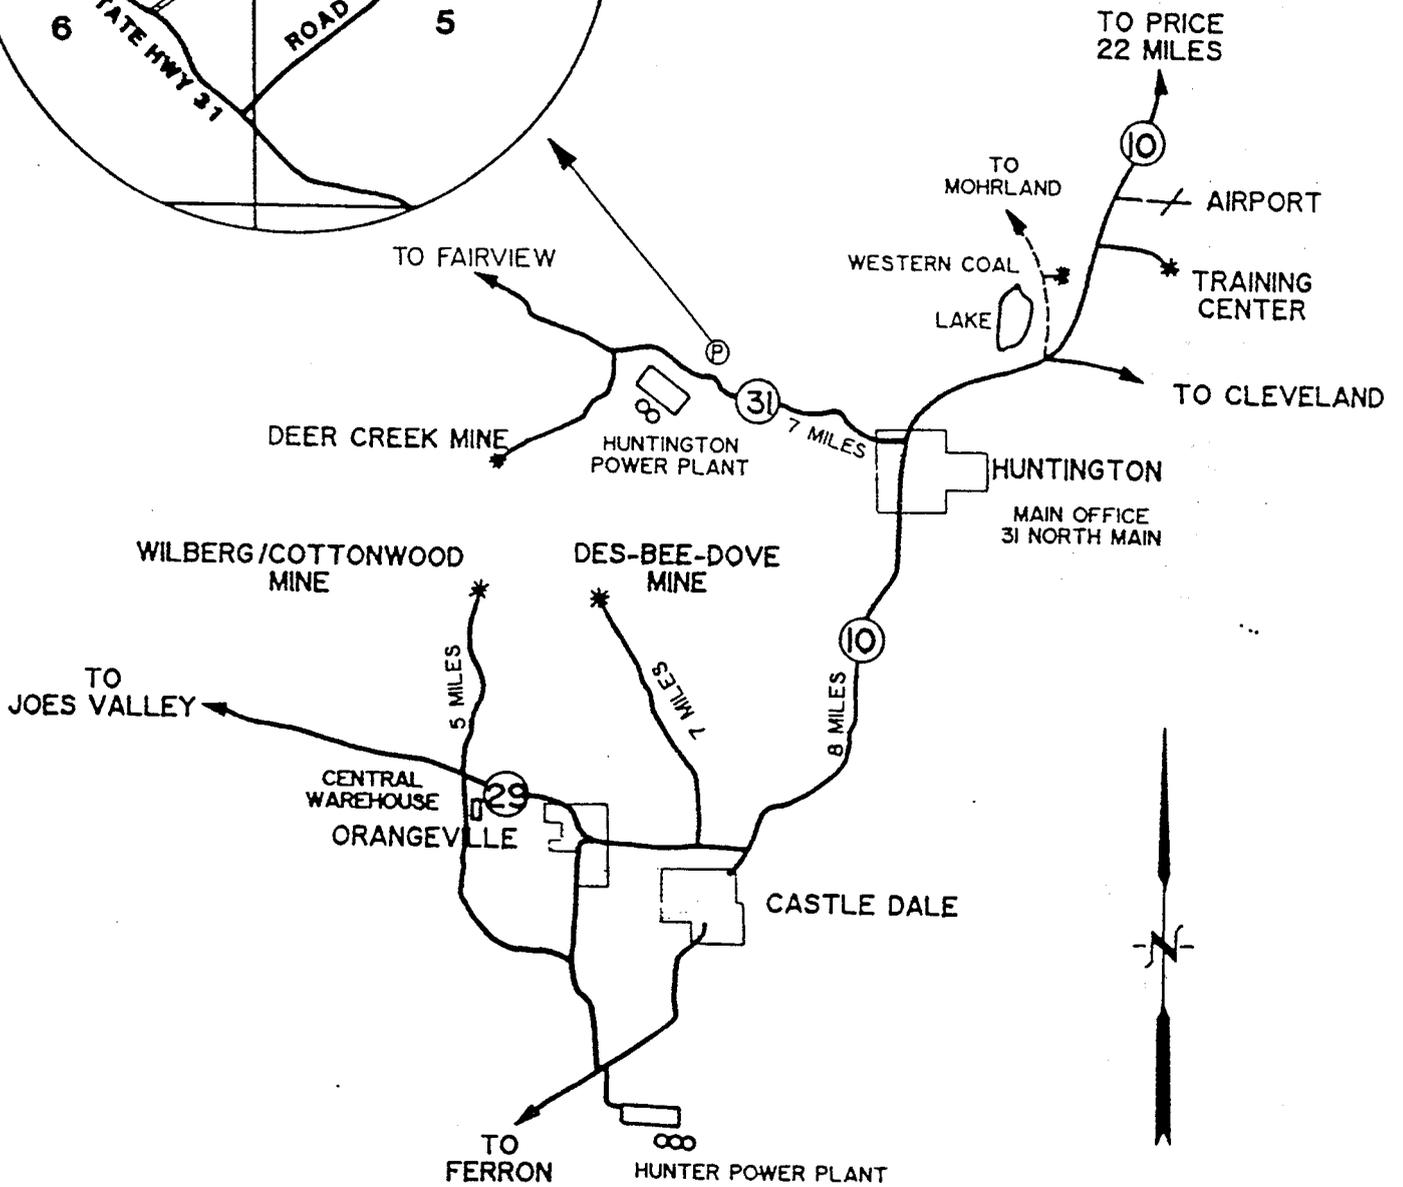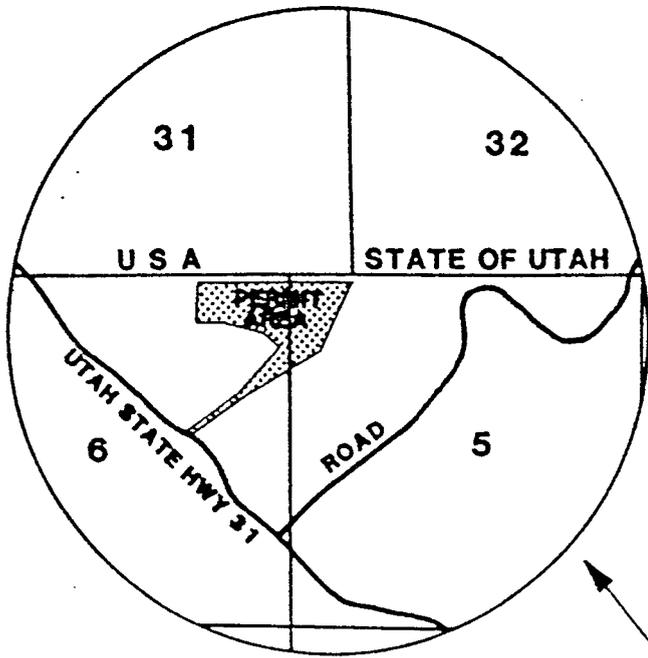

WASTE ROCK DISPOSAL SITE DEER CREEK MINE LOCATION MAP

CHRONOLOGY
DEER CREEK MINE
WASTE ROCK SITE
ACT/015/018

Utah Power and Light Company
Emery County, Utah
September 13, 1988

April 13, 1988	Initial Permit Application Package (PAP) received by the Division
May 23, 1988	Division Technical Staff review draft Initial Completeness Review with Utah Power and Light staff
May 31, 1988	Division Initial Completeness Review routed to operator
June 9, 1988	Utah Power and Light responds to Completeness items from Division Initial Completeness Review
June 24, 1988	Application determined complete
June 28, 1988	Utah Power and Light initiates public notice for four consecutive weeks (6/28, 7/5, 7/12, 7/19, 1988)
July 6, 1988	Division issues Determination of Completeness Notification letters to interested and affected agencies
August 18, 1988	Public comment period concludes with no adverse comments received
August 5, 1988	
August 15, 1988	
August 23, 1988	Utah Power and Light responds to
Technical	
August 29, 1988	Deficiency items
September 7, 1988	
September 12, 1988	
September 13, 1988	Division makes necessary findings - issues permit

WP+/12:16

MINE PLAN INFORMATION

Mine Name Deer Creek Waste Rock Site State ID: ACT/015/018

Operator Utah Power and Light Co. County: Emery

Controlled By Utah Power and Light Co.

Contact Person(s) Dave Smaldone Position: Director,

Telephone: (801) 220-4227 Permitting & Compliance

New/Existing Existing Mining Method n/a

Fed. Lease No.(s) n/a

Legal Description(s) _____

State Lease No.(s) n/a

Legal Description(s) _____

Other Leases (identify) None - The waste rock site is fee land owned by UP&L

Legal Descriptions _____

Ownership Data: For Waste Rock Site only

Surface Resources (acres)	Existing Permit Area	Proposed Permit Area	Total Life of Mine Area
Federal	_____	_____	_____
State	_____	_____	_____
Private	_____	46.22	46.22
Other	_____	_____	_____
TOTAL	_____	46.22	46.22

Coal Ownership (Acres)

Federal	_____	n/a	_____
State	_____	n/a	_____
Private	_____	n/a	_____
Other	_____	n/a	_____
TOTAL	_____	n/a	_____

FINDINGS

Utah Power and Light Company
Deer Creek Mine
Waste Rock Disposal Site
ACT/015/018
Emery County, Utah

1. The plan and the permit application are accurate and complete and all requirements of the Surface Mining Control and Reclamation Act (the "Act"), and the approved Utah State Program have been complied with (UMC 786.19[a]).
2. The applicant proposes acceptable practices for the reclamation of disturbed lands (MRP Part 4). These practices have been shown to be effective in the short-term; there are no long-term reclamation records utilizing native species in the western United States. Nevertheless, the regulatory authority has determined that reclamation, as required by the Act, can be feasibly accomplished under the Permit Application Package (PAP) (UMC 786.19[b]) (see Technical Analysis (TA) Section UMC 817.111-.117).
3. The assessment of the probable cumulative impacts of all anticipated coal mining and reclamation activities in the general area on the hydrologic balance has been made by the regulatory authority. The Operation and Reclamation Plan proposed under the application has been designed to prevent damage to the hydrologic balance in the permit area (UMC 786.19[c] and UCA 40-10-11[2][c]). (See Gentry Mountain Cumulative Hydrologic Impact Analysis [CHIA].)
4. The proposed lands to be included within the waste rock disposal site are:
 - a. not included within an area designated unsuitable for underground coal mining operations;
 - b. not within an area under study for designated lands unsuitable for underground coal mining operations;
 - c. not on any lands subject to the prohibitions or limitations of 30 CFR 761.11[a] (national parks, etc.), 761.11[f] (public buildings, etc.) and 761.11[g] (cemeteries);

- d. not within 100 feet of the outside right-of-way line of a public road (UMC 761.11); and
 - e. not within 300 feet of any occupied dwelling (UMC 786.19[d]).
5. The regulatory authority's issuance of a permit is in compliance with the National Historic Preservation Act and implementing regulations (36 CFR 800) (UMC 786.19[e]). (See attached letter from State Historic Preservation Officer [SHPO] dated May 5, 1988.)
 6. The applicant has the legal right to enter and complete mining and reclamation activities in the permit area through fee ownership of the property (UMC 786.19[f]).
 7. The applicant has shown that prior violations of applicable laws and regulations have been corrected (UMC 786.19[g]). (Memo of August 25, 1988 from Joe Helfrich, DOGM.)
 8. Utah Power and Light Company is not delinquent in payment of fees for the Abandoned Mine Reclamation Fund (UMC 786.19[h]). (Memo of August 25, 1988 from Joe Helfrich, DOGM.)
 9. The applicant does not control and has not controlled mining operations with a demonstrated pattern of willful violations of the Act of such nature, duration and with such resulting irreparable damage to the environment as to indicate an intent not to comply with the provisions of the Act (UMC 786.19[i]). (Memo of August 25, 1988 from Joe Helfrich, DOGM.)
 10. Underground coal mining and reclamation operations to be performed under the permit will not be inconsistent with other operations anticipated to be performed in areas adjacent to the proposed permit area (UMC 786.19[j]).
 11. A detailed analysis of the proposed bond for the Waste Rock Disposal Site has been made. The bond estimate is \$463,808. The regulatory authority has made appropriate adjustments to reflect costs which would be incurred by the state, if it was required to contract the final reclamation activities for the mine site. The bond shall be posted (UMC 786.19[k]) with the regulatory authority prior to final permit issuance.

12. The applicant has satisfied the requirements for alluvial valley floors and prime farmlands (UMC 786.19[1]). (See TA Section UMC 783.27 and 785.19.)
13. The proposed postmining land-use of the permit area has been approved by the regulatory authority (UMC 786.19[m]). (See TA, Section UMC 817.133.)
14. The regulatory authority has made all specific approvals required by the Act, the Cooperative Agreement and the Federal Lands Program (UMC 786.19[n]).
15. The proposed operation will not affect the continued existence of any threatened or endangered species or result in the destruction or adverse modification of their critical habitats (UMC 786.19[o]). (See PAP Page 9-1.)
16. All procedures for public participation required by the Act, and the approved Utah State Program have been compiled with (UMC 786.11-.15).
17. The applicant does not propose to use any existing structures in connection with or to facilitate underground coal mining activities (UMC 786.21).

John Whitehead 9/12/88
Permit Supervisor

Lance P. Breyton 9/13
Administrator, Mineral Resource
Development and Reclamation Program

Kenneth E. May
Associate Director, Mining

Dwaine H. Nielson
Director



State of Utah

DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

Norman H. Bangertter
Governor

Dee C. Hansen
Executive Director

Dianne R. Nielson, Ph.D.
Division Director

355 West North Temple
3 Triad Center, Suite 350
Salt Lake City, Utah 84180-1203
801-538-5340

November 15, 1988

TO: Coal File

FROM:  John Whitehead, Permit Supervisor/
Reclamation Hydrologist

RE: Resolution of Special Conditions from OSM Permit
UT-0016,10/85, Utah Power and Light Company, Deer
Creek Mine, ACT/015/018, Folder #2, Carbon County, Utah

This memo is to document the resolution of special conditions from the 1985 OSM permit for the Deer Creek Mine.

Condition #1 - This condition, which required submittal of calculations and information regarding the sediment pond for the Deer Creek Mine, was satisfied by a December 10, 1985, Utah Power and Light Company submittal. OSM approved the submittal on December 15, 1986.

Condition #2 - This condition required installation of surface water monitoring devices on Deer Creek and Grimes Wash. This condition was satisfied in 1986. Utah Power and Light Company (UP&L) notified DOGM on June 2, 1986 that the equipment was installed. Subsequent field inspections verified this installation.

Condition #3 - This condition required installation of increased culvert capacity in the Deer Creek and Elk Canyon Creek drainages to convey the 10-year, 24-hour storm event. UP&L has installed increased culvert capacity in the Deer Creek drainage. This has been verified by field inspections. On November 21, 1986, DOGM allowed UP&L to delay achieving compliance with this condition, based on the fact that the Division requirements will be revised to a 10-year, 6-hour storm when new rules are adopted. The present configuration complies with this requirement.

Condition #4 - This condition required riprap installation specifications for final reclamation. It appears as Condition #1 in the revised state permit issued September 13, 1988.

Condition #5 - This condition allows an experimental practice on the final reclamation of the Deer Creek channel to be performed in accordance with approved designs. The revised state permit includes this as Condition #2.

Page 2
Memo to Coal File
ACT/015/018
November 15, 1988

Condition #6 - This condition contained water replacement requirements which were appealed by UP&L. As a result of the appeal, revised language has been drafted that is satisfactory to OSM, DOGM and UP&L. The revised language is contained as Condition #3 in the revised state permit.

Condition #7 - This condition dealt with existing raptor nests that might be adversely affected by mine-related subsidence. It appears in the revised state permit as Condition #4.

Condition #8 - This condition required UP&L to obtain approval prior to beginning second seam mining inside a perennial stream buffer zone. This condition appears as Condition #5 in the revised state permit.

In addition, the Division of Oil, Gas and Mining has included conditions No. 6 and 7 in the revised Deer Creek permit. Condition 6 deals with identification of parameters utilized in postmining discharge sampling and an analysis of postmining discharging impacts to surface drainages. Condition #7 includes standardized language requiring the operator to mitigate subsidence related surface disturbances, should they occur.

djh
cc: R. Holbrook
B. Warmack
AT7/73-74

RECEIVED
SEP 28 1988

FEDERAL
(April 1987)

Permit Number ACT/015/018, September 13, 1988
DIVISION OF (Revised)
OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING
355 West North Temple
3 Triad Center, Suite 350
Salt Lake City, Utah 84180-1203
(801) 538-5340

This permit, ACT/015/018, is issued for the state of Utah by the Utah Division of Oil, Gas and Mining (DOGM) to:

Utah Power and Light Company
P. O. Box 899
Salt Lake City, Utah 84110
(801) 220-4227

for the Deer Creek Mine. Utah Power and Light Company (UP&L) is the lessee of federal coal leases SL-064607-064621, SL-064900, U-1358, SL-070645, U-02292, U-084923, U-084924, U-083066, U-040151, U-044025, U-014275, U-024319, U-47979, and the owner/lessee of certain fee-owned parcels. A performance bond is filed with the DOGM in the amount of \$1,687,808.00, payable to the state of Utah, Division of Oil, Gas and Mining and the Office of Surface Mining Reclamation and Enforcement (OSMRE). DOGM must receive a copy of this permit signed and dated by the permittee.

Sec. 1 STATUTES AND REGULATIONS - This permit is issued pursuant to the Utah Coal Mining and Reclamation Act of 1979, Utah Code Annotated (UCA) 40-10-1 et seq, hereafter referred to as the Act.

Sec. 2 PERMIT AREA - The permittee is authorized to conduct underground coal mining activities on the following described lands (as shown on the maps appended as Attachments B and C) within the permit area at the Deer Creek Mine, situated in the state of Utah, Emery County, and located:

Township 16 South, Range 7 East, SLBM

Section 27: SW1/4
Section 28: SE1/4, E1/2 SW1/4

Township 16 South, Range 7 East, SLBM (Cont'd.)

Section 33: E1/2, E1/2 W1/2, SW1/4 SW1/4
Section 34: W1/2, SE1/4, S1/2 NE1/4

Township 17 South, Range 7 East, SLBM

Section 2: SW1/4, Lots 2, 5, 6, 7, 10, 11, 12
Section 3: W1/2, W1/2 NE1/4, NE1/4 NE1/4, S1/2 SE1/4,
Lots 1, 2, 3, 4
Secs. 4 through 9: All
Section 10: NE1/4 NW1/4, SW1/4
Section 15: N1/2, SW1/4
Section 16 through 21: All
Section 22: S1/2, NW1/4
Section 27: N1/2 N1/2, SE1/4 NE1/4, All West of
Deer Creek Fault
Section 28: N1/2 N1/2
Section 29: N1/2 N1/2
Section 30: N1/2 NE1/4, SW1/4 NE1/4, NW1/4 SE1/4,
Lots 1, 2, 3

Township 17 South, Range 6 East, SLBM

Section 1: E1/2, E1/2 W1/2
Section 12: E1/2, E1/2 W1/2
Section 13: E1/2, E1/2 W1/2
Section 24: E1/2, E1/2 W1/2
Section 25: N1/2 NE1/4

State Lands

Township 17 South, Range 7 East, SLBM

Section 2: SE1/4

Fee Lands:

Township 17 South, Range 7 East, SLBM

Section 10: SE1/4
Section 11: W1/2 NW1/4, NE1/4 NW1/4, Portions of SE1/4
NW1/4, W1/2 SW1/4
Section 14: Portions of W1/2 W1/2, All West of Deer
Creek Fault
Section 15: SE1/4
Section 22: NE1/4

Also:

Beginning at the SE corner of NE1/4 SE1/4 Section 25, Township 17 South, Range 6 East, SLM, thence North 160 rods, West 116 rods to center line of Cottonwood Creek; thence Southerly along center line of said creek to a point 84 rods West of the beginning; thence East 84 rods to the beginning.

Township 17 South, Range 8 East, SLBM

Section 5: NW1/4 NW1/4 Lot 4
SW1/4 NW1/4 Lot 5

Section 6: NE1/4 NE1/4 Lot 1
SE1/4 NE1/4
SW1/4 NE1/4

This legal description is for the permit area (as shown on Attachments B and C) of the Deer Creek Mine and Waste Rock Disposal Area. The permittee is authorized to conduct underground coal mining activities and related surface activities on the foregoing described property subject to the conditions of the leases, the approved mining plan, including all conditions and all other applicable conditions, laws and regulations.

- Sec. 3 PERMIT TERM - This revised permit becomes effective on September 13, 1988 and expires on February 7, 1991.
- Sec. 4 ASSIGNMENT OF PERMIT RIGHTS - The permit rights may not be transferred, assigned or sold without the approval of the Director, DOGM. Transfer, assignment or sale of permit rights must be done in accordance with applicable regulations, including but not limited to 30 CFR 740.13(e) and UMC 788.17-.19.
- Sec. 5 RIGHT OF ENTRY - The permittee shall allow the authorized representative of the DOGM, including but not limited to inspectors, and representatives of OSMRE, without advance notice or a search warrant, upon presentation of appropriate credentials, and without delay to:

- A. have the rights of entry provided for in 30 CFR 840.12, UMC 840.12, 30 CFR 842.13 and UMC 842.13; and
- B. be accompanied by private persons for the purpose of conducting an inspection in accordance with UMC 842.12 and 30 CFR 842, when the inspection is in response to an alleged violation reported by the private person.

Sec. 6 SCOPE OF OPERATIONS - The permittee shall conduct underground coal mining activities only on those lands specifically designated as within the permit area on the maps submitted in the mining and reclamation plan and permit application and approved for the term of the permit and which are subject to the performance bond.

Sec. 7 ENVIRONMENTAL IMPACTS - The permittee shall minimize any adverse impact to the environment or public health and safety through but not limited to:

- A. accelerated monitoring to determine the nature and extent of noncompliance and the results of the noncompliance;
- B. immediate implementation of measures necessary to comply; and
- C. warning, as soon as possible after learning of such noncompliance, any person whose health and safety is in imminent danger due to the noncompliance.

Sec. 8 DISPOSAL OF POLLUTANTS - The permittee shall dispose of solids, sludge, filter backwash or pollutants in the course of treatment or control of waters or emissions to the air in the manner required by the approved Utah State Program and the Federal Lands Program which prevents violation of any applicable state or federal law.

Sec. 9 CONDUCT OF OPERATIONS - The permittee shall conduct its operations:

- A. in accordance with the terms of the permit to prevent significant, imminent environmental harm to the health and safety of the public; and

B. utilizing methods specified as conditions of the permit by DOGM in approving alternative methods of compliance with the performance standards of the Act, the approved Utah State Program and the Federal Lands Program.

- Sec. 10 AUTHORIZED AGENT - The permittee shall provide the names, addresses and telephone numbers of persons responsible for operations under the permit to whom notices and orders are to be delivered.
- Sec. 11 COMPLIANCE WITH OTHER LAWS - The permittee shall comply with the provisions of the Water Pollution Control Act (33 USC 1151 et seq,) and the Clean Air Act (42 USC 7401 et seq), UCA 26-11-1 et seq, and UCA 26-13-1 et seq.
- Sec. 12 PERMIT RENEWAL - Upon expiration, this permit may be renewed for areas within the boundaries of the existing permit in accordance with the Act, the approved Utah State Program and the Federal Lands Program.
- Sec. 13 CULTURAL RESOURCES - If during the course of mining operations, previously unidentified cultural resources are discovered, the permittee shall ensure that the site(s) is not disturbed and shall notify DOGM. DOGM, after coordination with OSMRE, shall inform the permittee of necessary actions required. The permittee shall implement the mitigation measures required by DOGM within the time frame specified by DOGM.
- Sec. 14 APPEALS - The permittee shall have the right to appeal as provided for under UMC 787.
- Sec. 15 SPECIAL CONDITIONS - In addition to the general obligations and/or requirements set out in the leases, the federal mining plan approval, and this permit, the permittee shall comply with the special conditions appended hereto as Attachment A.

The above conditions (Secs. 1-15) are also imposed upon the permittee's agents and employees. The failure or refusal of any of these persons to comply with these conditions shall be deemed a failure of the permittee to comply with the terms of this permit and the lease. The permittee shall require his agents, contractors and subcontractors involved in activities concerning this permit to include these conditions in the contracts between and among them. These conditions may be revised or amended, in writing, by the mutual consent of DOGM and the permittee at any time to adjust to changed conditions or to correct an oversight. DOGM may amend these conditions at any time without the consent of the permittee in order to make them consistent with any new federal or state statutes and any new regulations.

THE STATE OF UTAH

By: *Dianne R. Nelson*
Date: *September 13, 1988*

I certify that I have read, understand and accept the requirements of this permit and any special conditions attached.

C. Brent Johnson
Authorized Representative of
the Permittee
Date: *9-19-88*

APPROVED AS TO FORM:

By: *Barbara W Roberts*
Assistant Attorney General
Date: *September 13, 1988*

Deer Creek Mine
Attachment "A"
Special Conditions
September 13, 1988

Condition No. 1

No element of riprap to be placed in reclaimed channels and energy dissipator structures will exceed one-third the channel or structure bottom width.

Condition No. 2

The permittee shall conduct experimental practice on the final reclaimed Deer Creek channel only according to the designs approved by DOGM. If the experimental practice should prove to be inadequate to meet the standards of Subchapter K as determined by DOGM, the applicant shall submit detailed plans for approval of an alternative environmental protection method as directed by DOGM in accordance with UMC 785.13(h)(4)(i) and (ii). The permittee shall conduct additional monitoring requirements in association with the approved experimental practice as DOGM may require according to UMC 785.13(h)(4)(iii).

Condition No. 3

In order to fulfill the requirement to restore the land affected by permittee's mining operations to a condition capable of supporting the current and postmining land uses which are stated in the permit (Deer Creek Mine Plan, pages 2-151 through 2-154, and pages 4-38 to 4-39), the permittee will replace water determined to have been lost or adversely affected as a result of permittee's mining operations if such loss or adverse impact occurs prior to final bond release. The water will be replaced from an alternate source in sufficient quantity and quality to maintain the current and postmining land uses which are stated in the permit (Deer Creek Mine Plan, pages 2-151 to 2-154 and 4-38 to 4-39).

During the course of regular monitoring activities required by the permit, or as the permittee otherwise acquires knowledge, the permittee will advise the Division of the loss or adverse occurrence discussed above, within ten working days of having determined that it has occurred. Within ten working days after the Division notifies the permittee in writing that it has determined that the water loss is the result of the permittee's mining operation, the permittee shall meet with the Division to determine if a plan for replacement is necessary, and if so, to establish a schedule for submittal of a plan to replace the affected water. Upon acceptance of the plan by the Division, the plan shall be implemented. Permittee reserves the right to appeal the Division's water loss determination as well as the proposed plan and schedule for water replacement as provided by Utah Code Ann. 40-10-22(3)(a).

Deer Creek Mine
Attachment "A"
Special Conditions
September 13, 1988
(Continued)

Condition No. 4

Existing raptor nests adversely affected by mine related subsidence shall be replaced or otherwise mitigated by the permittee in consultation with the U.S. Fish and Wildlife Service and the Utah Division of Wildlife Resources according to the requirements of UMC 784.21 and UMC 817.97. Notification of the loss to the above named agencies and DOGM shall take place within two working days of the permittee becoming aware that the loss has occurred.

Condition No. 5

Prior to beginning second seam mining inside a perennial stream buffer zone as defined by a 35 degree angle of draw from vertical, measured from the limit of mining in the lowest seam, to the center of the stream channel, the permittee shall present a detailed evaluation of the anticipated effects of multiple seam mining on perennial streams as required by UMC 817.126(a). This evaluation must be based upon subsidence monitoring information collected on multiple seam mining in areas with similar overburden depths and surface topography.

Condition No. 6 (UMC 817.50 - TM)


- A. The applicant shall sample postmining discharges for the parameters on Table 1, page 4-37.6 of the PAP, on an annual basis until bond release. Sampling will assess if discharges are in compliance with the effluent standards of UMC 817.42 and all other applicable state and federal regulations. The applicant must provide treatment, if necessary, of any discharges to achieve compliance with applicable effluent standards during the period of discharge.
- B. The applicant shall provide, by October 31, 1988, an analysis of potential postmining discharge impacts to surface drainages including mitigation measures where indicated.

Deer Creek Mine
Attachment "A"
Special Conditions
September 13, 1988
(Continued)

Condition No. 7 (UMC 817.124 - RVS)

- A. The applicant shall restore areas impacted by subsidence caused surface cracks or other subsidence features such as escarpments (not to include naturally occurring escarpments which are not a result of mining) which are of a size or nature that could, in the Division's determination, either injure or kill grazing livestock. Restoration shall include recontouring of the affected land surface including measures to prevent rilling, and revegetation in accordance with the approved permanent revegetation plan in the PAP. Restoration shall be undertaken after annual subsidence survey data indicate that the surface has stabilized but in all cases restoration and revegetation shall be completed prior to bond release.
- B. The applicant shall compensate surface owners, except for land owned by the applicant, for lands which cannot be safely grazed due to hazards caused by surface effects of subsidence, with land (in close proximity) of comparable size and grazing capacity to be used for grazing until restoration of the damaged land is achieved.
- C. The applicant shall compensate at a fair market value, owners of livestock which are injured or killed as a direct result of surface hazards caused by subsidence.

WP+/12:3-5

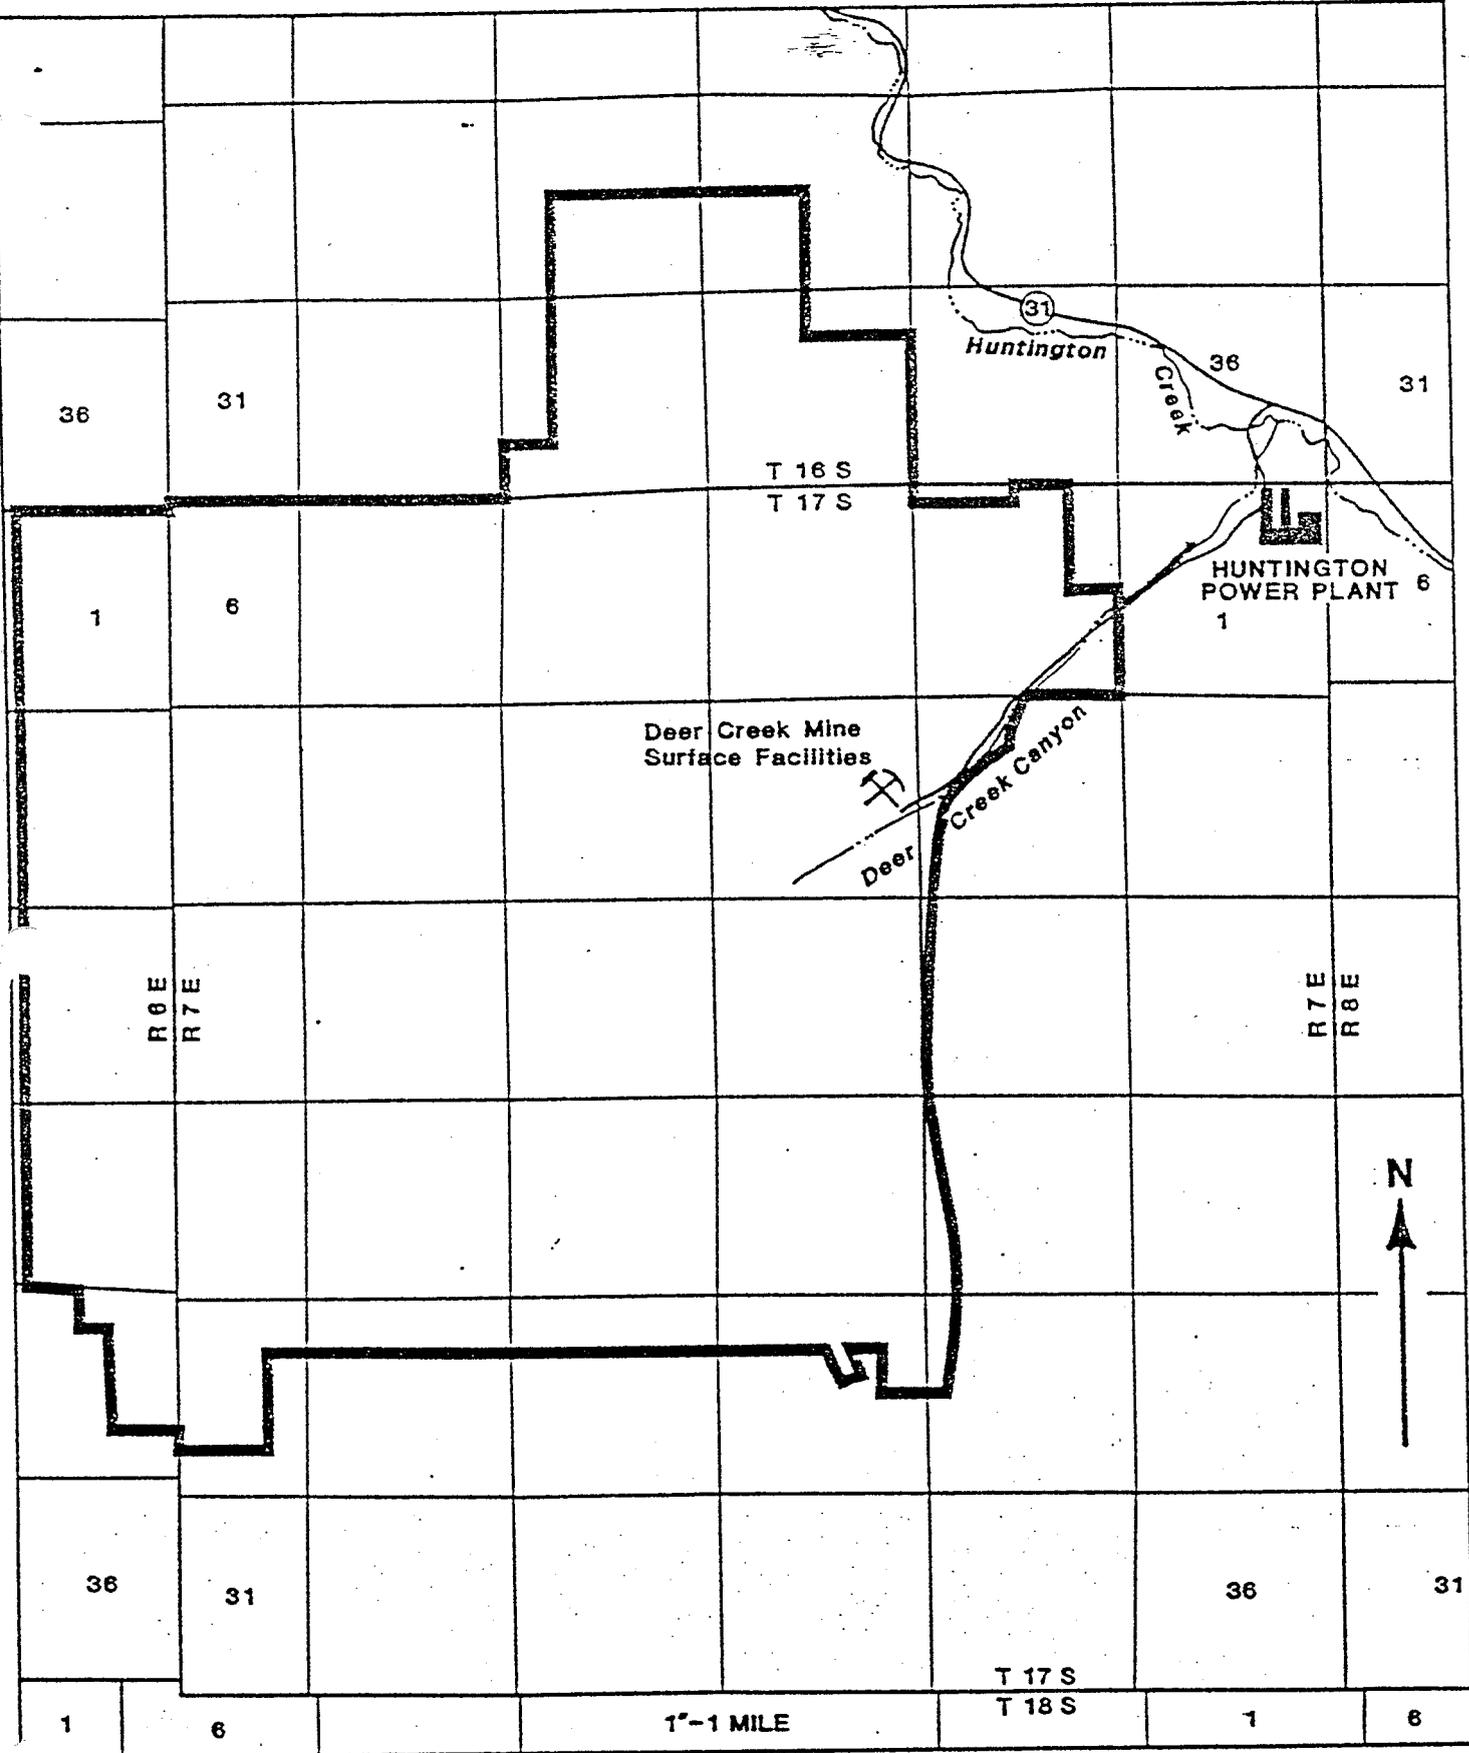

Deer Creek Mine Permit Area

TECHNICAL ANALYSIS
DEER CREEK WASTE ROCK FACILITY
ACT/015/018

Utah Power and Light Company
September 13, 1988

UMC 783.27 Prime Farmland Investigation - (JSL)

Existing Environment and Applicant's Proposal

Discussion referring to the land use can be found in Chapter 10 of the PAP. The soils mapped at the proposed waste rock disposal facility are in the Mesic moisture regime, average annual precipitation of 6 to 8 inches, with no available irrigation water for agricultural activities. The Soil Conservation Service (SCS) has determined that the proposed disturbance area soil series, Badlands and Persayo, to be in the capability-subclass VIIIs-7 (non-irrigated) and VIIe-D4 (non-irrigated), respectively. The area primarily consists of alkali soils with non-agriculturally beneficial plant species. The proposed area is located in undeveloped rangeland with the ecosystem classification ranging from a desert shale D34 for the Persayo soil and a non-existing classification for the Badland soil series. Therefore, the Division has determined that the proposed waste rock storage facility site is not prime farmland.

Compliance

The applicant's proposal adequately meets the requirements of this section. The applicant complies with this section.

Stipulations

None.

UMC 785.19 Underground Coal Mining Activities on Areas or Adjacent to Areas Including Alluvial Valley Floors in the Arid or Semi-Arid Areas of Utah - (RVS/TM/BAS)

Existing Environment and Applicant's Proposal

The waste rock storage sites designated Area 1 and Area 2 within the permit area are located approximately 2,000 feet northeast from Huntington Creek. A reconnaissance study (Nimick, et al. 1985) delineated potential alluvial valley floors in the Castledale area, and identified a potential alluvial valley floor along Huntington Creek from southeast of the town of Huntington to northwest of the Huntington Power Plant. The reconnaissance study recognized surface irrigation, subirrigation and potentially irrigable sites to delineate potential alluvial valley floors.

Plate 5-1 identifies the presence of a relatively smooth surface composed of Quarternary alluvium within and adjacent to Huntington Creek. Moreover, Huntington Creek is a perennial stream occurring within a topographic valley that has a channel exceeding three feet in width and six inches in depth.

The surface drainage at the waste rock storage site consists of a few dry washes which drain to Huntington Creek one-half mile to the south as described on page 6-1 of the PAP and shown on Plates 4-5 through 4-8.

The permit area consists of undeveloped range land, vegetated by salt and drought tolerant species. Gardner and mat saltbush are major components of the vegetation community. The permit area has not been developed for any agricultural activity or farming practice, including the pasturing of livestock, production of hay, or any other crop.

The applicant concedes the presence of an alluvial valley floor on page 11-1 of the PAP and asserts that the ground-water conditions delineated by drilling preclude operationally-induced impacts to the hydrologic system in the alluvial valley floor.

Compliance

The Division herein determines on the basis of published information and information provided on Plate 5-1 that unconsolidated streamlaid deposit-holding streams are present and there is sufficient water to support agricultural activities along Huntington Creek in T17S, R8E, Section 6. Accordingly, the Division designates the area in Section 6 that is underlain by Quarternary alluvium to be an alluvial valley floor.

Permeability data given in Chapter VI indicate a relatively low rate (less than 0.3 ft/day) of hydraulic conductivity in the Masuk member of the Mancos Shale. In addition, borehole data suggest that the Masuk member is not everywhere saturated at depth, but rather ground water tends to occur along fractures and/or faults at from 6,210 to 6,220 feet.

Surface drainage controls provide for total containment of all disturbed area runoff from two 100-year, 24-hour storms as described on page 6-1 of the PAP and shown on Plates 4-5 through 4-8.

The Division considers the proposed areas of waste rock disposal to have a low potential for being hydrologically connected, in the subsurface, to the designated alluvial valley floor. However, since available data do not preclude the possibility of a hydrologic connection, the applicant has committed to completing a monitoring well between the alluvial valley floor and waste rock disposal areas to identify any adverse impacts to the ground-water system.

The Division determines that the proposed operation:

1. Does not include the extraction of coal;
2. Will not result in significant disturbance to the surface or ground-water regime; and
3. Occurs on undeveloped range land which is not significant to farming, grazing, or any other agricultural activity.
4. The requirements of paragraphs (d) and (e) of this section are hereby waived, as provided by UMC 785.19(c)(3)(ii).

UMC 800 Bonding - (PGL)

The reclamation cost estimate (subtotal) was adequate; \$412,164. However, an error was found in the 10 percent contingency and 2.3 percent escalation factor.

The applicant must post \$463,808 (1989 dollars) for the Deer Creek Waste Rock Storage Facility.

Reclamation Subtotal	\$ 412,164
10% Contingency	\$ <u>41,216</u>
Subtotal	\$ 453,380
Inflate to 1989 dollars at 2.3%	\$ <u>10,428</u>
Total	\$ 463,808

The applicant currently has a bond posted for the Deer Creek Mine in the amount of \$1,224,000 (1989 dollars). A rider should be added to bond #927-21-58 (American Casualty Company of Reading, Pennsylvania) for a total bond amount of \$1,687,808.

UMC 817.11 Signs and Markers - (RVS)

Existing Environment and Applicant's Proposal

The applicant describes signs and markers on page 2-10 as follows:

1. Signs and markers will be constructed of durable material, designed uniformly, maintained and removed according to UMC 817.11 (page 2-10).
2. A permit identification sign will be posted at the entrance to the access road, according to UMC 817.11(c)(2) (page 2-10).

3. Perimeter markers will be posted to clearly delineate areas affected by surface operations or facilities. Plate 5-1 identifies the permit area and the extent of Area 1 and Area 2 where surface operations will occur.
4. Blasting signs will be conspicuously placed within the immediate vicinity of blasting activities and at the entrance to the facility.
5. Topsoil markers will be installed on all stockpiles.

Compliance

The applicant has committed to posting and maintaining signs and markers according to UMC 817.11 and installing a permit identification sign along the access road according to UMC 817.11(c)(2). Moreover, the applicant commits to posting perimeter markers, blasting signs and topsoil markers.

The applicant has specifically committed to placing, as necessary, blasting signs that state "Warning: Explosives in Use" at entrances to surface operations as required by UMC 817.11(f)(2).

The applicant has committed to removing signs and markers, as appropriate, upon cessation of operations or bond release.

The applicant complies with this section.

Stipulations

None.

UMC 817.21-.25 Topsoil Management - (JSL)

Existing Environment and Applicant's Proposal

The Deer Creek Waste Rock Disposal Site soil resources are discussed in Chapter 7 and delineated on a soil survey map, Plate 7-1, No. CM-10775DR. The soil survey was developed from the USDA Soil Conservation Service, Soil Survey Carbon-Emery Area, Utah, December 1970. The soils in the proposed 29.5 acres of disturbance at the waste disposal area consist primarily of the Badland and Persayo soil series.

The Persayo soil is taxonomically classified as a loamy, mixed (calcareous), mesic, shallow Typic Torriorthent. This soil is primarily residuum and alluvium, derived mainly from shale.

The Badland soil consists of nearly barren beds of actively eroding shale and shale interbedded with gypsum.

Results of the soil analysis are listed on pages 7-2 and 7-3 of the PAP. The Persayo soil average pH is neutral, ranging from 7.49 to 7.83. The soil is considered non-saline and non-sodic with an electrical conductivity ranging from 1.73 to 2.26 mmhos/cm and the average sodium adsorption ratio is 1.1. The Badland soil series average pH is slightly alkaline, ranging from 7.94 to 8.02. The soil is considered a saline sodic material with electrical conductivity ranging from 6.0 to 10.6 mmho/cm and the average sodium adsorption ratio ranging from 6.5 to 28.1.

Removal

Use of the proposed 29.5 acre disposal area is planned to take place in two phases. The soil removal plan is discussed in the operation plan, Chapter 3, Section III, pages 3-3 through 3-4. Topsoil will be salvaged after vegetation has been removed from the site. The soil survey indicates a topsoil depth of one inch. The top six inches of soil will be removed and salvaged. Following topsoil removal, the remaining soil will be excavated to the soil berms and to the lines and grades as required to construct cuts and fills.

Storage

The salvaged upper six inches of soil will be temporarily stockpiled and then redistributed on the embankment slopes of the access road and over the top and outslope of the soil berms (Plate 4-3). Temporarily stockpiled topsoil will be placed away from construction activity. Silt fences will be established around the perimeter of temporary stockpiles if the pile exists for more than seven days (page 3-1). Following topsoil placement, the soil will be reseeded with the interim seed mix found in Section VI of Chapter 3. Silt fencing will be established around the embankment slopes until interim vegetation is established.

Redistribution

The soil redistribution plan is discussed in Chapter 3, Section III. Reclamation will take place in two phases. When Area 1 reaches capacity, the topsoil will be removed from the earthen berm and temporarily stockpiled. The subsoil material from the south berm will be spread over the south section of Area 1 and the north berm will be spread over the northern half of Area 1.

After the subsoil has been spread over the waste rock, the topsoil material will be loaded and dumped over the top section of the fill and a D6 dozer will spread the topsoil over the fill slopes. The subsoil material will be scarified prior to topsoil distribution. The topsoil and subsoil will be scarified again after topsoil redistribution. This operation will be duplicated when Area 2 is full of underground development waste material.

Nutrients and Amendments

The operator will apply a combination of 50 pounds of Ammonia Nitrate plus 75 pounds of triple superphosphate per acre by hand broadcasting or by hydroseeding.

Compliance

The proposed topsoil removal, storage and redistribution plan meets the requirements of this section. The applicant has committed to place the salvaged topsoil excavated from the road construction away from the road construction activity and protect with silt fencing.

The applicant complies with this section.

Stipulations

None.

UMC 817.41 Hydrologic Balance: General Requirements - (TM/RVS)

Existing Environment and Applicant's Proposal

Surface Water

Discussion of the applicant's disturbed and undisturbed area drainage conveyance systems, peak flow determinations and methodologies, sediment controls, channel and spillway flow designs, channel linings, and culvert designs are shown on pages 4-8 through 4-13, Exhibits A through J and Maps 4-4 through 4-10.

The undisturbed drainage plan for the site will consist of two permanent diversion systems diverting ephemeral streamflows around the Deer Creek Waste Rock Storage Facility fill structure. These diversions will empty into an existing drainage channel in one case and into a natural drainage channel in the other. The disturbed drainage plan will consist of two sediment basins, small diversion ditches along the toe of the storage facility slopes, and sheet flow off the top surface of the storage facility fill pad. A phased approach to construction will dictate the sequence of construction for all structures (page 2-4 and 2-5).

Ground Water

The applicant provides information about ground water in Chapter VI of the PAP.

The waste rock facility will be located on the Masuk member of the Mancos Shale. Chapter VI gives data from 11 boreholes (see Plate 5-1) that were drilled for the purpose of identifying and evaluating ground-water resources in the vicinity of the proposed permit area. Eight boreholes did not encounter water, whereas three boreholes penetrated ground water in the Masuk member. Ground water in the Masuk member was encountered at elevations between 6,210 and 6,223 feet, and located within 650 feet from Huntington Creek. Water level data suggest ground water moves westward towards Huntington Creek.

The applicant infers that there is a limited amount of ground water flowing along fractures within the Masuk member. Permeability tests indicate the Masuk member has a hydraulic conductivity of less than 0.3 feet/day (page 6-29).

No springs occur within or adjacent to the waste rock facility permit area. However, a wet weather seep occurs within Area #1. The applicant proposes to construct a drainage system to collect and divert this water to the surface water diversion system (page 2-5).

Compliance

Surface Water

The information contained in the plan meets the requirements of these regulations regarding the treatment of disturbed and undisturbed surface waters to demonstrate that changes to the prevailing hydrologic balance will not occur during the operational phase of this operation.

The applicant has provided the necessary detailed information regarding reclaimed channels and post-mining monitoring to demonstrate that changes to prevailing hydrologic balance will not occur following reclamation and that the applicant will meet all applicable state and federal water quality laws following reclamation.

Ground Water

The applicant has provided information that identifies the occurrence of ground water adjacent to the permit area. Although the applicant had provided these data, boreholes were plugged and abandoned, and are no longer available for ground-water monitoring. Accordingly, the applicant has proposed to complete a borehole to assess if operations induce adverse changes in water quality and depth to ground water (page 6-3).

The designs given for collecting and diverting water from the wet weather seep will adequately contain this flow.

The applicant is in compliance with this section.

Stipulations

None.

UMC 817.43, .45 and .47 Design Considerations of Diversions and Impoundments - (TM)

Existing Environment and Applicant's Proposal

The discussion of the applicant's disturbed and undisturbed area drainage conveyance system, peak flow determinations and methodologies, sediment controls, channel and spillway flow designs, channel linings, and culvert designs are shown on pages 4-8 through 4-13, Exhibits A through J, and Maps 4-4 through 4-10.

The undisturbed drainage plan for the site will consist of two permanent diversion systems diverting ephemeral streamflows around the Deer Creek Waste Rock Storage Facility fill structure and into an existing drainage channel in one case and into a natural drainage channel in the other. The disturbed drainage plan will consist of two sediment basins, small diversion ditches along the toe of the storage facility slopes, and sheet flow off the top surface of the storage facility fill pad. A phased approach to construction will dictate the sequence of construction for all structures (page 2-4 and 2-5).

Compliance

The applicant has met all the sizing requirements regarding routing of peak flows and the sizing of riprap protection on all ditches and impoundments, providing for adequate treatment of all disturbed and undisturbed waters during the operational phase of this facility.

Stipulations

None.

UMC 817.44 Hydrologic Balance: Stream Channel Diversion - (TM)

Existing Environment and Applicant's Proposal

The applicant shows reclaimed channels leaving the reclaimed storage facility on Map 4-8, Phase IV. The reclamation of the storage area will occur in phases as outlined on page 3-4 and 3-5 of the PAP. All calculations for reclaimed channels 1, 2A, and 2B are found on pages 4-13.1, 4.13.2, Exhibit K, L, M, N, O, P, and Q. Figure 4-8 details the channel cross sections for Channels 1, 2A, and 2B, as well as typical riprap lined channels to replace culverts on the access road.

Compliance

The applicant has provided the calculations necessary to show that the various riprap channels to be constructed during reclamation of the area are stable. Channels sized for the 100-year, 24-hour storm event, cross sections and riprap installations are shown on Figure 4-8.

The applicant complies with this section.

Stipulations

None.

UMC 817.46 Hydrologic Balance: Sedimentation Ponds - (PGL)

Existing Environment and Applicant's Proposal

Two detention basins are planned and designed to collect and retain the surface runoff from the disturbed areas for the Deer Creek Waste Rock Storage Facility. Both basins are over-designed to provide total containment of two 100-year, 24-hour storm events (pages 4-8 through 4-13).

Basin Number 1 is located in the western portion of the permit area and will be constructed by excavating six feet of soil material. Basin Number 2 is located along the southern berm in Area 2. This basin will be formed by excavating some soil and using the perimeter berm as a dam to achieve the required storage volume. The dam is designed to ensure that the safety factor against failure for the embankments is at least 1.5. At least 120 days prior to construction of Basin Number 2 (15 years hence), the Division will be provided with data from geotechnical tests to determine if soil materials with adequate strength parameters are available in quantity and quality for the construction of the basin. If not, the necessary design changes will be made.

Page 4-12 delineated the required runoff and sediment volumes for the two basins during phases I and II.

Both basins will be reclaimed after the reclamation of the storage facility (page 3-2).

Compliance

Basins 1 and 2 are over-designed as total containment structures.

Basin Number 1 is an incised structure that will contain the design events with fill slopes of 2:1. A stability analysis of the slopes of the embankments of Basin Number 2 demonstrated a static safety factor of 1.5 (page 4-14 and 4-15). The applicant committed to resubmit data for Division review regarding the quality and quantity of material for the construction of Basin Number 2 and verify the stability analysis at least 120 days prior to construction (15 years hence).

The applicant committed to inspect the ponds during construction and certify them after construction by a registered professional engineer. The applicant also committed to examine these structures quarterly for structural weakness, erosion and other hazardous conditions (page 2-10.1).

These ponds will be removed after the waste rock area has been topsoiled and revegetated.

The applicant complies with this section.

Stipulations

None.

UMC 817.47 Hydrologic Balance: Discharge Structures - (PGL)

Existing Environment and Applicant's Proposal

Plates 4-9 and 4-10 portray spillway details for Sediment Basin Area 1 and Sediment Basin Area 2. The designs for both of these spillways are discussed on page 4-12.

Compliance

Spillways are designed using standard engineering practices.

The applicant complies with this section.

Stipulations

None.

UMC 817.48 Hydrologic Balance: Acid-Forming and Toxic-Forming Materials - (JSL)

Existing Environment and Applicant's Proposal

The applicant has committed to dispose of all acid- or toxic-forming waste material under four feet of non-toxic cover material (Chapter 2, Section III, part c, and in Chapter 4, Section II, part c). The PAP describes the acid- or toxic-forming potential sampling program for the underground development waste in Chapter 7, page 7-4. Sampling will be taken on a biannual basis starting fall of 1988 at a rate of two samples per acre. Samples will consist of a grab sample of the upper one foot of waste material. If potential acid- or toxic-forming material is identified in the sampling program, additional sampling will be implemented to delineate the extent of the acid- or toxic-forming material. Sampling results will be submitted to the Division for review within two weeks of operational inspection or upon receipt of the analysis. Current analysis can be found in Chapter 7, pages 7-6 and 7-6.1.

Compliance

The applicant's proposal adequately addresses the requirements of this section.

Stipulations

None.

UMC 817.49 Permanent and Temporary Impoundments - (PGL)

(See UMC 817.46)

UMC 817.52 Hydrologic Balance: Surface and Ground-Water Monitoring - (RVS/TM)

Existing Environment and Applicant's Proposal

Ground Water - (RVS)

The applicant commits to conduct baseline and operational monitoring, according to the Division Guidelines, on ground-water encountered by the proposed borehole (page 6-3).

Surface Water - (TM)

The applicant proposes two no-discharge structures which will contain two 100-year, 24-hour storms to treat disturbed area runoff. Since there is no surface water in the area other than drainage in response to storm events, the applicant has not proposed any operational or postmining monitoring of surface water.

Compliance

Ground Water

The applicant's ground-water monitoring proposal is in compliance with this section.

Surface Water

The applicant has provided information regarding postmining water monitoring locations to ensure compliance with applicable state and federal water quality laws. The monitoring of runoff from the reclaimed area will be undertaken to demonstrate that water quality without treatment is adequate to minimize disturbance to the prevailing hydrologic balance and provide a basis for removal of water quality control systems. Postmining monitoring points will be located at the inlets to each sediment basin (see Plate 4-7 for locations) (page 6-3).

The applicant complies with this section.

UMC 817.56 Postmining Rehabilitation of Sedimentation Ponds, Diversions, Impoundments, and Treatment Facilities - (PGL)

There are no permanent ponds or impoundments proposed, therefore this section is not applicable.

UMC 817.61-.68 Use of Explosives - (PGL)

Existing Environment and Applicant's Proposal

All blasting will be conducted by certified blasters (page 2-9). The specific regulations that will be followed by UP&L regarding explosives are included on page 2-9 and 2-9.1.

Compliance

The applicant commits to conduct blasts only by certified blasters and has detailed when and how blasting will be undertaken. The information for blasting records was given.

The applicant complies with this section.

Stipulations

None

UMC 817.71 Disposal of Underground Development Waste and Excess Spoil and Non-Acid and Non-Toxic Forming Coal Processing - (PGL)

Existing Environment and Applicant's Proposal

The waste rock PAP addresses the disposal of underground development waste generated during coal mining, sediments from the sedimentation pond, and trommel rejects. These materials will be hauled to the disposal site by truck.

Compliance

The design of the waste rock storage facility incorporates recognized professional standards and was certified by a professional engineer. The waste rock will be dumped, spread and compacted in 24-inch thick horizontal lifts with side slopes of 2h:1v. The stability analysis, using site-specific parameters, demonstrates a long-term static safety factor of 1.8 (page 4-30). The applicant has committed to sample the waste material every five years to determine the strength of the material. If it is found the strength of the material has decreased, a stability analysis will be performed to determine the proper slope for construction to maintain the required factor of safety (page 4-30).

A foundation investigation of the waste rock area was performed to determine the design requirements for stability (page 4-32 through 4-52). This investigation defined the characteristics of the subsurface material throughout the soil profile in the waste rock storage area and determined the slopes at which the rock pile could be safely built. The designed slopes of 2h:1v demonstrated a factor of safety of at least 1.5 (page 4-40).

The design of the fill is, by definition, neither a valley nor a head-of-hollow fill. Therefore, requirements of 817.72-.73 are not applicable.

The operation of the facility will be inspected quarterly by a registered professional engineer and during critical construction periods (page 2-9).

The applicant complies with this section.

Stipulations

None.

UMC 817.81-.88 Coal Processing Waste Banks - (PGL)

No coal is processed at the Deer Creek Mine, therefore these sections are not applicable.

UMC 817.89 Disposal of Non-Coal Wastes - (PGL)

Existing Environment and Applicant's Proposal

During the levelling process, trash will be separated from the fill material and disposed of in an approved sanitary landfill (page 2-8).

Compliance

Non-coal waste will be properly handled at the waste rock storage facility.

The applicant complies with this section.

Stipulations

None.

UMC 817.91-.93 Coal Processing Waste: Dams and Embankments - (PGL)

No coal is processed at the Deer Creek Mine, therefore these sections are not applicable.

UMC 817.95 Air Resources Protection - (PGL)

Existing Environment and Applicant's Proposal

The applicant will apply water to the fill surface to aid in control of fugitive dust (page 2-7).

Compliance

The applicant committed to control fugitive dust. An air quality permit is pending. The Bureau of Air Quality authorized construction to begin prior to issuance of this permit (personal communication with Dave Kopta, Bureau of Air Quality, on August 30, 1988).

Stipulations

None.

UMC 817.97 Protection of Wildlife and Related Environmental Values - (BAS)

Existing Environment and Applicant's Proposal

Wildlife information is based on site-specific surveys, data, and reports compiled from state and federal land and wildlife management agencies. The approved Deer Creek Mine PAP, Volume 2, is referenced, which contains a species list and discussion of wildlife occurring within the Wasatch Plateau biogeographic area. Wildlife protection and impact mitigation measures are discussed on pages 9-1 to 9-7.

No threatened or endangered species or habitat is present in the permit area. The nearest known raptor nest is 1.3 miles northeast of the site. Golden eagles have been observed soaring over the permit area, but no on-site hunting or perching activity has been documented. No electric powerlines or transmission facilities will be constructed to serve the facility.

The site occurs in part on critical-valued big game winter range. The location, operation, and reclamation plan of the disposal site have taken big game winter use into consideration. Operation and reclamation will occur in phases. The development and reclamation of the north portion of Area 1 will precede development of Area 2 by seven years (page 9-2). Revegetation of 4.5 acres in Area 1 is expected to compensate for lost forage on the 4.5 acres of critical-valued habitat in Area 2. Interim and permanent seed mixes (pages 3-6 and 3-8) were selected for their nutrition, cover characteristics, and ability to support wildlife habitat.

No water or riparian habitat occurs within the permit area.

Compliance

The operation, reclamation plan, and attendant seed mix have satisfied the concerns of state and federal wildlife management agencies.

The applicant complies with this section.

Stipulations

None.

UMC 817.99 Slides and Other Damage - (PGL)

Existing Environment and Applicant's Proposal

The applicant committed to notify the Division by the fastest available method any time a slide occurs that may have a potential adverse effect on public, property, health, safety, or the environment (page 2-10.1).

Compliance

The applicant complies with this section.

Stipulations

None.

UMC 817.100 Contemporaneous Reclamation - (BAS)

Existing Environment and Applicant's Proposal

Contemporaneous reclamation plans are described on pages 3-1 and 3-2 and shown on Plates 4-5 to 4-8. Interim revegetation will be implemented during the fall planting season on road embankment slopes, top, and outslopes of the soil berm and sediment pond banks.

Compliance

The applicant commits to timely interim or final reclamation on all areas not in use.

The applicant complies with this section.

Stipulations

None.

UMC 817.101 Backfilling and Grading - (PGL)

Existing Environment and Applicant's Proposal

The waste rock storage facility will be built in four phases over the 30 year plus life of the site. Spreading of subsoil and topsoil will initiate approximately seven years following the construction of Area #1. Contemporaneous reclamation will occur throughout the life of the facility as shown on Plates 4-5 through 4-8. Cross sectional views of the waste rock storage facility are shown on Plate 4-3.

Compliance

A stability analysis of the waste rock material currently produced at the Deer Creek Mine demonstrated a safety factor of 1.8 (page 4-30 and attachments). Reclamation will consist of spreading subsoil and topsoil on the engineered grade.

The applicant complies with this section.

Stipulations

None.

UMC 817.106 Regrading or Stabilizing Rills and Gullies - (PGL)

Existing Environment and Applicant's Proposal

The applicant committed to stabilize rills and gullies deeper than 9 inches in areas that have been regraded and topsoiled (page 2-10.1).

Compliance

The applicant complies with this section.

Stipulations

None.

UMC 817.111 Revegetation: General Requirements - (BAS)

Existing Environment and Applicant's Proposal

Following completion of topsoiling and seedbed preparation, areas will be seeded with the approved seed mix (page 3-8) at a rate of 62 grass, 58 forb and 77 shrub seeds/ft². Rate of application will be reduced by half for drill-seeding: the applicant wishes to choose from among three seeding options, depending on size of area, slope, equipment availability, and past successes. Seeding methods may include drill-seeding, hydroseeding, or hand-broadcasting with a "hurricane" spreader (page 3-9). Seeded areas will be fertilized and mulched (page 3-9).

Compliance

The seed mix and seeding rate has been calculated to produce prompt revegetation compatible with the post-mining land use which is wildlife habitat. Plant species were selected for their suitability to local conditions, ease of establishment and compatibility with surrounding vegetation.

Shrub seeds and seeding rates are designed to replace important browse species for wintering big game. Supplemental shrub stocking will be implemented if monitoring shows that the required shrub density has not been achieved (page 3-12). Revegetation cover will be self-regenerating and at least equal to pre-mining conditions.

The applicant complies with this section.

Stipulations

None.

UMC 817.112 Revegetation: Use of Introduced Species - (BAS)

Existing Environment and Applicant's Proposal

Yellow sweetclover (Melilotus officinalis) and alfalfa (Medicago sativa) are proposed for use in both interim and final revegetation seed mixes. With the exception of these two species, the applicant's seed mixes (pages 3-6 and 3-8) consist of native species indigenous to the locality.

Compliance

Both introduced species are widespread in Huntington Canyon. Yellow sweetclover is valuable as a fast-growing, non-permanent, nitrogen-fixing soil stabilizer. Alfalfa was added at the request of the Utah Division of Wildlife Resources for its high forage value. In a non-irrigated situation, and under browsing pressure, alfalfa is not expected to dominate or outcompete native forbs in the seed mixes.

The applicant complies with this section.

Stipulations

None.

UMC 817.113 Revegetation: Timing - (BAS)

Existing Environment and Applicant's Proposal

Following soil placement and seedbed preparation, seeding will take place as contemporaneously as practicable (pages 3-6 and 3-9). Final seedbed preparation will be delayed until late September (pages 3-7 and 3-9). Planting will occur in late fall and not sooner than October 1.

Compliance

Field research and reclamation experience demonstrates that late fall is the optimum period for planting. Seeds are less vulnerable to rodent depredation. Dormancy is broken over winter, and seeds are poised to take advantage of optimum moisture conditions, resulting from snowmelt or spring rain.

The applicant complies with this section.

Stipulations

None.

UMC 817.114 Revegetation: Mulching and Other Soil Stabilizing Practices - (BAS)

Existing Environment and Applicant's Proposal

The applicant has opted to choose from three types of mulch, each tailored to a specific planting method. Where planting is done by hand broadcasting, seeded slopes will be covered with a mechanically-anchored erosion-control blanket. Where hydroseeding is used, a hydromulch with tackifier will be applied at a rate of 2,000 lbs/acre. If drill-seeding is used, alfalfa hay mulch will be applied at a rate of two tons/acre (page 3-7).

Compliance

Mulch will be important for soil moisture retention, temperature moderation, and runoff protection due to the southern exposure and soil erosion potential. All mulch options and rates of application have been used successfully at other Utah mine reclamation operations, and are acceptable to the Division.

The applicant complies with this section.

Stipulations

None.

UMC 817.115 Revegetation: Grazing - (BAS)

Existing Environment and Applicant's Proposal

No grazing is proposed. Therefore, this section does not apply.

UMC 817.116 Revegetation: Standards for Success - (BAS)

Existing Environment and Applicant's Proposal

The applicant has established two reference areas (Plate 8-1). Vegetation sampling data (Chapter 8) will be used for the revegetation standard. Final reclamation sampling of ground cover and woody plant density will follow the same methods used in initial reference area sampling. Productivity sampling for bond release will be conducted using the double sampling method (page 3-11).

The bond release ground cover standard will be 70 percent of reference area ground cover with 90 percent statistical confidence. Woody plant stocking level shall be at least 90 percent of the reference area stocking level with 80 percent statistical confidence. Productivity shall be 90 percent of reference area production at 90 percent statistical confidence.

Final reclamation monitoring will include two qualitative inspections yearly. Quantitative measurements will be conducted during years 2, 3, 5, 9 and 10 (page 3-13).

Compliance

Vegetation information (Chapter 8) adequately addressed UMC 783.19 requirements, and provides an acceptable standard for determination of revegetation success. Sampling techniques proposed to measure revegetation success have been approved by the Division and are accepted by the scientific community. The applicant has committed to adhere to Division-approved standards of success for cover, productivity and woody plant density at the required statistical levels.

The applicant complies with this section.

Stipulations

None.

UMC 817.117 Revegetation: Tree and Shrub Stocking for Forest Land - (BAS)

Existing Environment and Applicant's Proposal

The applicant proposes to apply shrub seed at a rate of 77 PLS/ft² (page 3-8). If monitoring indicates that adequate shrub density will not be achieved, then supplemental shrub stocking will be initiated, using plant species from the final revegetation mix (page 3-12).

Compliance

On areas developed for wildlife management, shrub and half-shrub stocking must meet standards described under this section, which is at least 90 percent of the reference area stocking rate. If the reference area stocking rate (page 8-4) is not realized by seeding, the applicant commits to initiate supplemental stocking in order to achieve the standard.

The applicant complies with this section.

Stipulations

None.

UMC 817.131 Cessation of Operations: Temporary - (PGL)

Existing Environment and Applicant's Proposal

The applicant commits to notify the Division if operations cease for a period beyond 30 days. The information to be included in the notice is outlined on page 2-10.1.

Compliance

The applicant complies with this section.

Stipulations

None.

UMC 817.132 Cessation of Operations: Permanent - (PGL)

Existing Environment and Applicant's Proposal

The PAP addresses the permanent reclamation of the Deer Creek Waste Rock Storage Site.

Compliance

The applicant complies with this section.

Stipulations

None.

UMC 817.133 Postmining Land Use - (BAS)

Existing Environment and Applicant's Proposal

The applicant describes land use on page 10-5, which is primarily wildlife habitat. Page 3-1 states that land will be returned to wildlife habitat as its postmining land use.

Compliance

The operation and reclamation plan identified in Chapter 3 is designed to mitigate wildlife impacts. Reclamation is consistent with the postmining land use, and is expected to enhance the area's forage and cover characteristics, promoting a higher level of wildlife use than existed prior to development.

The applicant complies with this section.

Stipulations

None.

UMC 817.160-.166 Roads: Class II - (PGL)

Existing Environment and Applicant's Proposal

The access road gradient is designed with an overall grade of 3 percent and a maximum pitch grade of 7.5 percent for 400 feet, and is located to minimize the volume of material to be disturbed during construction (page 3-3). Foundations for embankments will be free from organic material and topsoil. The top layer of the ground underlying the proposed roadway embankment will be moistened and scarified to a depth of 6 inches and then compacted to 90 percent of standard proctor, according to AASHTO Designation T-99 Method D (page 4-1). The final road surface will be composed of crushed gravel. As the road surface deteriorates due to usage and weather, a blade will be used to recontour the travel surface of the road. Road base gravel will be added as needed (page 2-3).

Upon termination of use of the facility, the gravel road surface and subgrade material will be removed and placed against the inside cut slope of the road cross section. Subsoil from the embankment slopes will be spread over the road. Topsoil material from the temporary stockpile will be evenly spread over the area and seeded (page 3-3).

Compliance

The access road has been located and designed according to required criteria. The applicant will construct, maintain, and reclaim according to the required criteria.

The applicant complies with this section.

Stipulations

None.

UMC 817.180 Other Transportation Facilities - (PGL)

There are no other transportation facilities associated with this facility, therefore this section does not apply.

UMC 817.181 Support Facilities and Utility Installations - (PGL)

Support facilities for the waste rock disposal site are located at the Deer Creek Mine (approved permit No. ACT/015/018), therefore this section does not apply.

GENTRY MOUNTAIN
CUMULATIVE HYDROLOGIC IMPACT
ASSESSMENT

Bear Canyon Mine, ACT/015/025

Deer Creek Mine Waste Rock Storage Facility, ACT/015/018

Hiawatha Mines Complex, ACT/007/011

Star Point Mines, ACT/007/006

Trail Canyon Mine, ACT/015/025

Carbon County and Emery County, Utah

Revised September 1988

TABLE OF CONTENTS

	Page	
I.	Introduction	<u>1</u>
	Geology	<u>1</u>
	Vegetation	<u>1</u>
	Hydrology	<u>4</u>
II.	Cumulative Impact Area	<u>5</u>
III.	Scope of Mining	<u>5</u>
	Star Point Mines (Plateau Mining Company)	<u>6</u>
	Hiawatha Mines Complex (U.S. Fuels Company)	<u>7</u>
	Bear Canyon and Trail Canyon Mines	<u>7</u>
	(Co-Op Mining Company)	
	Deer Creek Mine Waste Rock Storage Facility	<u>7</u>
	(Utah Power and Light Company)	
IV.	Study Area	<u>7</u>
	Geology	<u>7</u>
	Hydrologic Resources	<u>7</u>
	Ground Water	<u>7</u>
	Surface Water	<u>10</u>
	Serviceberry Creek Drainage (1)	<u>10</u>
	Mud Water Canyon Drainage (2-3)	<u>11</u>
	Gentry Ridge Drainage (4-8)	<u>11</u>
	Bear Creek - Trail Creek Drainage (9-13)	<u>12</u>
	Cedar Creek - Fish Creek Drainage (14-15)	<u>12</u>
	Miller Creek - Sand Wash Drainage (16-17)	<u>13</u>
V.	Potential Impacts	<u>13</u>
	Ground Water	<u>13</u>
	Dewatering	<u>14</u>
	Subsidence	<u>16</u>
	Surface Water	<u>17</u>
	Star Point Mines	<u>17</u>
	Hiawatha Mines Complex	<u>20</u>
	Bear Canyon Mine and Trail Canyon Mine	<u>24</u>
	Deer Creek Mine Waste Rock Storage Facility	<u>25</u>
VI.	Summary	<u>25</u>
VII.	References	<u>27</u>

Figures

	Page
1. Wasatch Plateau Coal Field	<u>2</u>
2. CIA and Mining Map	<u>Folder</u>
3. Stratigraphy of Gentry Mountain Area	<u>8</u>
4. Major Hydrologic Relationships and Location of Coal Processing Waste and Underground Development Waste	<u>Folder</u>
5. Surface Water Drainage Area Map	<u>Folder</u>
6. Potential Recharge Above the Coal Resource	<u>Folder</u>

I. INTRODUCTION

The purpose of this report is to provide a Cumulative Hydrologic Impact Assessment (CHIA) for Gentry Mountain located in Carbon and Emery counties, Utah. This assessment encompasses the probable cumulative impacts of all anticipated coal mining in the general area on the hydrologic balance and whether the operations proposed under the application have been designed to prevent damage to the hydrologic balance outside the proposed mine plan area. This report complies with legislation passed under Utah Code Annotated 40-10-1 et seq. and the attendant State Program rules under UMC 786.19(c).

Gentry Mountain occurs within the Wasatch Plateau Coal Field approximately 10 miles southwest of Price, Utah (Figure 1). The eastern margin of the Wasatch Plateau forms a rugged escarpment that overlooks Castle Valley and the San Rafael Swell to the east. Elevations along the eastern escarpment of the Wasatch Plateau range from approximately 6,500 to over 9,000 feet.

Precipitation varies from 40 inches at higher elevations to less than 10 inches at lower elevations. The area encompassed by the Wasatch Plateau may be classified as semiarid to subhumid.

GEOLOGY

Outcropping rocks of the Wasatch Plateau Coal Field range from Upper Cretaceous to Quarternary in age. The rock record reflects an overall regressive sequence from marine (Mancos Shale) through littoral (Star Point Sandstone) and lagoonal (Blackhawk Formation) to fluvial (Castlegate Sandstone, Price River Formation and North Horn Formation) and lacustrine (Flagstaff Limestone) depositional environments. Oscillating depositional environments within the overall regressive trend are represented by lithologies within the Blackhawk Formation. The major coal-bearing unit within the Wasatch Plateau Coal Field is the Blackhawk Formation.

VEGETATION

Vegetation of the Wasatch Plateau area is classified within the Colorado Plateau Floristic Division (Cronquist et al., 1972). The area occupies parts of both the Utah Plateaus and the Canyon Lands Floristic Sections. Vegetation communities of the area include Desert Shrub (Shadscale) at the lowest elevations through Sagebrush, Sagebrush-Grassland, Pinyon-Juniper, Mountain Brush, Douglas Fir-White Fir-Blue Spruce and Englemann Spruce-Subalpine Fir.

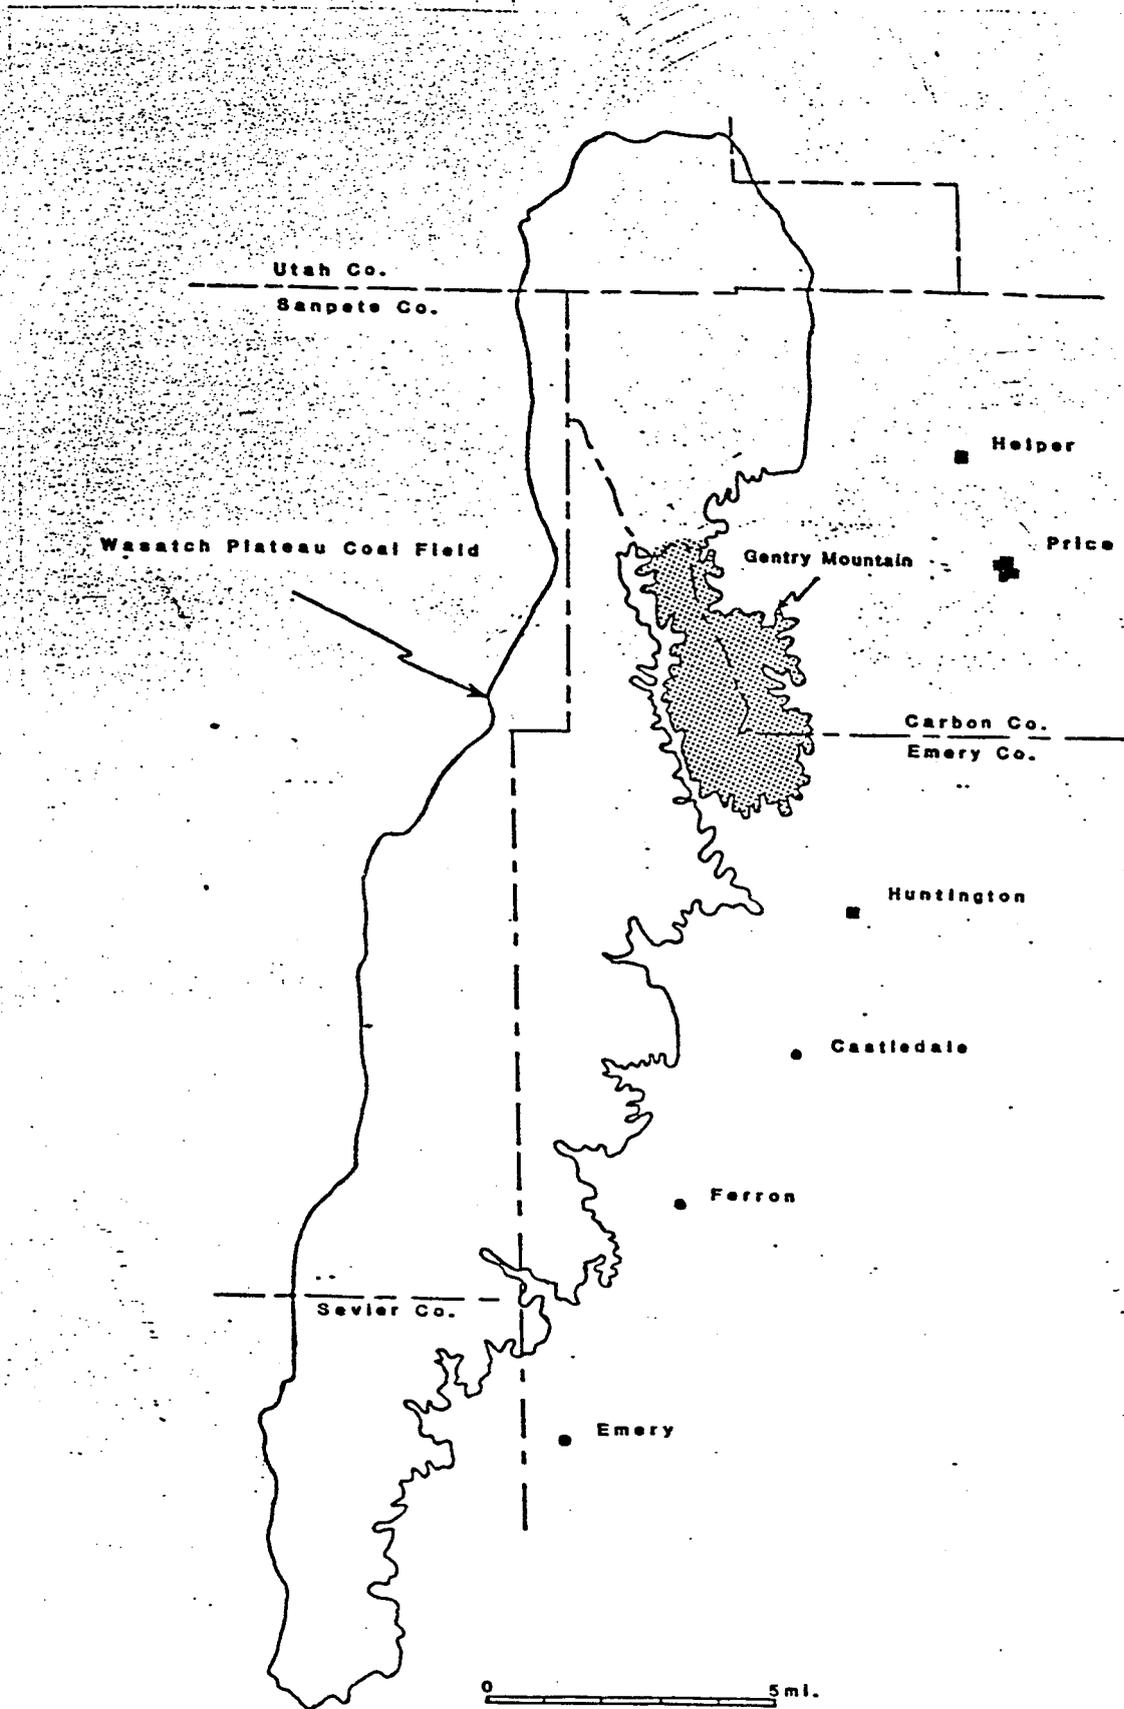


Figure 1. Wasatch Plateau Coal Field.

Desert Shrub communities are sparsely vegetated shrublands that, depending on elevation and soils, may be dominated by Shadscale (Atriplex confertifolia), Fourwing saltbush (A. canescens), Castle Valley clover (A. nuttallii) or Mat saltbush (A. corrugata) and can include Winter fat (Ceratoides lanata), Mormon tea (Ephedra spp.), Budsage (Artemisia spinescens), miscellaneous buckwheats (Erigonum spp.), Indian ricegrass (Oryzopsis hymenoides), Galleta grass (Hilaria jamesii), Grama grass (Bouteloua spp.), Needle and thread grass (Stipa comata), Sand dropseed (Sporobolus airoides) and Squirrel tail (Sitania hystrix). Greasewood (Sarcobatus vermiculatus) - Saltgrass (Distichlis stricta) can dominate bottomlands.

Many Sagebrush communities of the area are relatively dense shrub stands of (Artemisia tridentata var tridentata) with very little understory growth. In relatively undisturbed Sagebrush communities, Rabbitbrush (Chrysothamnus nauseosus or C. viscidiflorus), Mormon tea, and several perennial grasses including Thickspike and Western wheatgrass (Agropyron dasystachyum and A. smithii), Great Basin wildrye (Elymus cinereus), Indian ricegrass and Dropseed species may be common.

In the Sagebrush-Grassland type, the typical Big sage may give way to Artemisia tridentata var vaseyana (Mountain big sage) with a co-dominant perennial grass understory. Salina wildrye (Elymus salinus) can be co-dominant in these communities and may dominate an herbaceous Grassland type. Black sage (A. nova) with Salina Wildrye or Western wheatgrass understory is also common.

Pinyon-Juniper woodlands occupy drier sites often with stoney to very rocky soils. Pinus edulis and Juniperus osteoperma are co-dominant in the overstory. Understory vegetation ranges from sparse to moderate ground cover on range sites in poor to excellent condition. Understory species include Sagebrush, Mountain mahogany (Cercocarpus montanus), Snowberry (Symphoricarpus oreophilus), and several perennial grasses including Slender wheatgrass (Agropyron trachycaulum), Salina wildrye, Junegrass (Koeleria cristata) and Indian ricegrass.

Dominant shrubs of the Mountain Brush communities will vary depending on elevation and aspect. The drier south and west facing slopes may support dense stands of Gambel's oak (Quercus gambellii). Other dominants of this community may include Serviceberry (Amelanchier utahensis), Mountain mahogany (Cercocarpus montanus or C. ledifolius), Bitterbrush (Purshia tridentata) and Snowberry.

The range of the Douglas Fir-White Fir-Blue Spruce community is about 8,000 to 10,000 feet. Douglas Fir (Pseudotsuga mensiesii) is usually the dominant tree with White Fir (Abies concolor) and Blue

Spruce (Picea pungens) usually limited to the most mesic sites, often along streams. With dense canopies, understory vegetation may be sparse. Common shrubs include Serviceberry (Amelanchier spp.), Oregon grape (Berberis repens), Chokecherry (Prunus virginiana), Rocky Mountain Maple (Acre glabrum), Mountain lover (Pachistima myrsinites) and Snowberry. Bluebunch wheatgrass (Agropyron spicatum), Mountain brome (Bromus marginatus), and Kentucky bluegrass (Poa pratensis) are common grasses. Aspen stands (Populus tremuloides) can be found throughout the zone, particularly in mesic sites and as successional communities.

Picea engelmannii and Abies lasiocarpa dominate the Spruce-Fir zone at the highest elevations of the hydrologic impact area. While receiving about the same precipitation as the Douglas Fir communities, lower evapo-transpiration with cooler temperatures can permit a more lush vegetation in the Spruce-Fir zone. Limber pine (Pinus flexilis) often occupies steep or rocky, drier sites of this zone.

Small riparian communities are found at all elevations within the impact assessment area. With greater water availability and cooler temperatures, the riparian zone often includes more mesic species, e.g., those from a higher vegetation zone. Shrub species from the Mountain Shrub type may be found at most elevations.

Additional riparian zone shrubs include Narrowleaf cottonwood (Populus angustifolia), Redosier dogwood (Cornus stolonifera), Skunk bush (Rhus trilobata), river birch (Betula occidentalis) and various willows (Salix spp.). Grass species from the mesic zones may be represented (Mountain Shrub and higher zones) along with fescues (Festuca spp.) and miscellaneous sedges (Carex spp.). Small wet areas around springs and seeps will often support a dense growth of grasses, sedges and willows.

HYDROLOGY

Surface runoff from the Wasatch Plateau area flows either to the Price River Basin or the San Rafael River Basin. The Price River Basin, which includes about 1,800 square miles in six counties, is located primarily in Carbon and Emery Counties in East-Central Utah. The San Rafael River Basin, which includes about 2,300 square miles in three counties, is located mainly in Emery County to the south of the Price River Basin. The Price River drainage originates in the Wasatch Plateau about 12 miles west and south of Scofield Reservoir. Downstream from the reservoir the river flows in a generally southeasterly direction. The drainage is bounded by the Book Cliffs on the northeast, the Wasatch Plateau on the west, and the San Rafael Swell on the south. The San Rafael River Basin occupies part of two physiographic sections of the Colorado Plateau - The High Plateaus to the north and west and

Canyonlands to the south and east (Fenneman, 1946). Principal streams in the basin are Huntington and Cottonwood creeks, which merge to form the San Rafael River, and Ferron Creek, which joins the San Rafael River within a mile of that confluence. The San Rafael River also flows in a southeasterly direction to eventually join the Green River, after travelling from its headwaters in the Wasatch Plateau.

The water quality of both the Price River and the San Rafael Rivers is good in the mountainous headwater tributaries, but deteriorates rapidly as flow traverses the Mancos Shale. The shale lithology typically has low permeability, is easily eroded and contains large quantities of soluble salts that are major contributors to poor water quality. Depending upon the duration of contact, water quality degrades downstream to where Total Dissolved Solids (TDS) levels of 4,000 milligrams per liter (mg/l) are not uncommon. The predominant ion leached from the Mancos Shale is sulfate (SO₄) with values over 1,000 mg/l common in the lower reaches of the Price River.

Ground water is present in all lithostratigraphic units within the Wasatch Plateau Coal Field. Ground water occurs under localized conditions that often form a system of "perched" aquifers and associated springs and/or seeps. Significant localized ground-water resources are associated with the North Horn Formation and Price River Formation. The U.S. Geological Survey has identified and formally designated the Star Point-Blackhawk aquifer as the only regional ground-water resource occurring in the Wasatch Plateau Coal Field (Danielson, et al., 1981 and Lines, 1984).

II. CUMULATIVE IMPACT AREA (CIA)

Figure 2 delineates the CIA for current and projected mining in the Gentry Mountain area. The CIA encompasses approximately 118 square miles and includes Gentry Mountain, Wild Cattle Ridge and Star Point. The western and northern CIA boundaries are designated by drainages and drainage divides, whereas the southern boundary is defined by the southern extent of sections 1 through 5, T16S, R8E, and the eastern boundary is defined by the line separating R9E and R7E.

III. SCOPE OF MINING

STAR POINT MINES (PLATEAU MINING COMPANY)

The Plateau Mining Company permit area encompasses approximately 7,000 acres. There are three federal coal leases that are designated by the Bureau of Land Management as "Logical Mining Units" (LMUs): U-13097, SL-031286, and U-037045.

Mining operations began in 1916 when the Wattis Brothers and Mr. Browning bought 160 acres from the United States and developed the property for coal production. Coal was shipped in the autumn of 1917 when the railroad was completed, to the town of Wattis. The Lion Coal Company bought the coal interests in 1919. In 1967 Plateau Limited opened a new mine in the Hiawatha Seam. In 1971 United Nuclear purchased the mine and in July 1980 Plateau Mining Company bought the properties.

Historically, the Star Point #2 Mine (where mining has ceased) developed coal resources in the Hiawatha, Third, and Wattis seams by the room and pillar technique. During the permit term of 1987-1992, mining will occur in the Wattis and Third seams and development work is projected for the Hiawatha seam in the Star Point #1 Mine. Subsequent permit terms will involve further mining in all three of the coal seams through the year 2010. There will be room and pillar mining and longwall mining in the Wattis and Third seams and longwall mining in the Hiawatha seam.

There are certain areas where the cumulative effects of multiple seam mining will be experienced. The area of T15S R7E, Section 12, will have combined subsidence effects, and potentially, Section 18 of T15S R8E.

HIAWATHA MINES COMPLEX (U.S. FUELS COMPANY)

The Hiawatha Mines Complex permit area encompasses about 12,000 acres and is located adjacent to the Plateau Mining Company permit area. The Federal coal leases currently designated as LMUs are SL-025431 and U-026583. A large portion of the remainder of the coal is owned by U.S. Fuels. Coal is projected to be mined until the year 2014.

The Hiawatha Mines Complex is a consolidation of the original King, Hiawatha, Black Hawk, and Mohrland coal mines which began operating in the early 1900's. U.S. Fuels Company was organized in 1915 and began operating in 1916, when it took over the properties of the Consolidation Fuel Company, Castle Valley Coal Company, and Black Hawk Coal Company, all of which were located within the current permit boundary.

Mining has occurred throughout large portions of the permit area by the room and pillar technique: King 4 (A & B Seams), King 5 (B Seam), King 6 (A & Hiawatha Seams), King 7 (Hiawatha Seam), and King 8 (Upper Seam). Future longwall mining will be undertaken in the King 5 (A Seam) and King 8 (Upper Seam).

BEAR CANYON AND TRAIL CANYON MINES (CO-OP MINING COMPANY)

Co-Op Mining Company owns two mines located south of the Plateau Mining Company and Hiawatha Mines Complex permit areas.

The Bear Canyon Mine encompasses 991 acres. Mining during the first five-year permit term will occur in the Bear Canyon coal seam and thereafter, in the Hiawatha seam. There are two federal coal leases designated as LMUs at the Bear Canyon Mine, U-024316 and U-024318. Production will be from room and pillar mining methods with secondary pillaring.

The Trail Canyon Mine, located immediately west of the Bear Canyon property, has been operated by Co-Op Mining Company since 1938. Production to date has been from the Bear Canyon coal seam. The Trail Canyon Mine was declared suspended during 1983 and will be reclaimed.

DEER CREEK MINE WASTE ROCK STORAGE FACILITY (UTAH POWER AND LIGHT COMPANY)

The Deer Creek Mine Waste Rock Storage Facility permit area encompasses 46.22 acres and is located approximately three miles northeast of the Deer Creek Mine. This area will store waste rock from the Deer Creek Mine for at least 30 years. Utah Power and Light Company is owner of all the land within the permit area.

IV. STUDY AREA

GEOLOGY

The Gentry Mountain CIA is characterized by cliffs, narrow canyons and pediments. Stratigraphic units outcropping within the area include, from oldest to youngest, the Mancos Shale, Starpoint Sandstone, Blackhawk Formation, Castlegate Sandstone, Price River Formation, North Horn Formation, Flagstaff Formation and Quarternary deposits. Lithologic descriptions and unit thicknesses are given in Figure 3.

Rocks in the study area strike northwest and dip approximately three degrees to the southeast. Four major normal faults or fault zones (Pleasant Valley Fault, Trail Canyon Fault, unnamed fault, Bear Canyon Fault) trend north in the western portion of the CIA (Figure 4). Displacements range from several feet to approximately 800 feet.

HYDROLOGIC RESOURCES

Ground water

The ground-water regime within the CIA is dependent upon climatic and geologic parameters that establish systems of recharge, movement and discharge.

System	Series	Stratigraphic Unit	Thickness (feet)	Lithology and Water-Bearing Characteristics
Quaternary	Holocene and Pleistocene	Quaternary deposits	0-100	Alluvial and colluvium; clay, silt, sand, gravel, and boulders; yields water to springs that may cease to flow in late summer.
Tertiary	Paleocene	North Horn Formation	300 ±	Varigated shale and mudstone with interbeds of tan-to-gray sandstone; all of fluvial and lacustrine origin; yields water to springs.
		Price River Formation	200-250	Gray-to-brown, fine-to-coarse, and conglomeratic fluvial sandstone with thin beds of gray shale; yields water to springs locally.
Cretaceous	Upper Cretaceous	Castlegate Sandstone	150-200	Tan-to-brown fluvial sandstone and conglomerate; forms cliffs in most exposures; yields water to springs locally.
		Blackhawk Formation	1000 ±	Tan-to-gray discontinuous sandstone and gray carbonaceous shales with coal beds; all of marginal marine and paludal origin; locally scour-and-fill deposits of fluvial sandstone within less permeable sediments; yields water to springs and coal mines, mainly where fractured or jointed.
		Star Point Sandstone	350-450	Light-gray, white, massive, and thin beaded sandstone, grading downward from a massive cliff-forming unit at the top to thin interbedded sandstone and shale at the base; all of marginal marine and marine origin; yields water to springs and mines where fractured and jointed.
		Mancos Shale	1000 ±	Dark-gray marine shale with thin, discontinuous layers of gray limestone and sandstone; yields water to springs locally.

Figure 3. Stratigraphy of the Gentry Mountain Area (modified from Plateau Mining Company PAP, 1986, and Danielson, et al., 1981).

Snowmelt at higher elevations provides most of the ground-water recharge, particularly where permeable lithologies such as fractured or solution limestone are exposed at the surface. Vertical migration of ground water occurs through permeable rock units and/or along zones of faulting and fracturing. Lateral migration initiates when ground water encounters impermeable rocks and continues until either the land surface is intersected (and spring discharge occurs) or other permeable lithologies or zones are encountered that allow further vertical flow.

The Star Point Sandstone and lower portion of the Blackhawk Formation, Castlegate Sandstone, Price River Formation, North Horn Formation, Flagstaff Limestone, and Quarternary deposits are potential reservoirs or conduits for ground water in the CIA. Reservoir lithologies are predominantly sandstone and limestone. Sandstone reservoirs occur as channel and overbank, lenticular and tabular deposits, whereas limestone reservoirs have developed through solution processes and fracturing. Shale, siltstone and cemented sandstone beds act as aquacludes to impede ground-water movement. The Mancos Shale is considered a regional aquaclude that delimits downward flow within the CIA. Localized aquacludes include relatively thin, impermeable lithologies occurring within the stratigraphic section above the Star Point Sandstone.

The Star Point-Blackhawk aquifer is present and represents the only identified regional ground-water resource in the study area (Danielson, et al., 1981). Ground water associated with the Price River Formation and North Horn Formation may be characterized as occurring within an extensive "perched" aquifer zone and represents a significant hydrologic resource.

Faults and fractures act as effective conduits for ground water and allow unsaturated downward flow. Springs having significant discharges (10 gpm or greater) are most commonly located in proximity to major north-south trending fault or fracture zones (Figure 4). In particular, Bear Canyon Fault appears to act as a significant conduit for ground water. Mine workings contact with the Bear Canyon Fault at the 10th West Section in U.S. Fuels' King IV Mine has resulted in a sustained inflow of 900 to 1,000 gpm.

Other encounters with the Bear Canyon Fault in Plateau Mining Company's Star Point No. 1 Mine resulted in an initial high inflow rate that subsequently diminished. Three municipal wells (Huntington) have been developed adjacent to the Trail Canyon Fault near the junction of Wild Cattle Hollow and Gentry Hollow (Figure 4).

Data from seven boreholes located within and adjacent to the Star Point Mines permit area indicate ground water associated with the regional aquifer moves toward the south (Figure 4).

Approximately 325 seeps and springs occur within the CIA. Total spring discharge exceeds 1500 gpm. One hundred eighty-nine springs discharge from the North Horn Formation and Price River Formation (1,200 gpm); 37 springs discharge from the Castlegate Sandstone (80 gpm); 53 springs discharge from the Blackhawk Formation and Star Point Sandstone (200 gpm); and eight springs discharge from the Mancos Shale (40 gpm). Analyses from spring samples indicate water quality progressively decreases from the North Horn Formation to the Mancos Shale.

Mine inflow is estimated to be 134 gpm in the Star Point Mines, 950 gpm in the Hiawatha Mines Complex, and less than 50 gpm in the Trail Canyon Mine and Bear Canyon Mine. The majority of mine inflow (80 percent) is from faults and fractures with a lesser amount from paleochannels and wall weeps. Mine inflow is discharged to Mud Water Canyon at Star Point Mines and to Cedar Creek and Miller Creek at the Hiawatha Mines Complex. Mine inflow is not discharged at Bear Canyon Mine or Trail Canyon Mine. Mine water within the CIA represents ground-water depletion from storage in the Blackhawk Formation and Star Point Sandstone and the interception of flow along faults/fractures.

Surface Water

The CIA has been divided into six major drainage basins representing seventeen sub-drainage areas. The CIA encompasses drainage to both the San Rafael and Price River Basins (see Figure 5 and Table 1).

1. Serviceberry Creek Drainage

The Serviceberry Creek Drainage (1) includes the majority of disturbed area associated with the Plateau Mine. The mine exists in the headwaters of this creek drainage area of 6,135 acres. The average gradient of the creek within the CIA is 21 percent. Serviceberry Creek (1) is ephemeral within the CIA and eventually joins Miller Creek (16), east of the CIA, which is a perennial creek.

Vegetation communities in this drainage system include Douglas Fir-White Fir, Aspen, Mountain Brush, Sagebrush, including both Black sage and Big sage associations, Mixed Grass - Forb communities, and Pinyon - Juniper Woodlands. Riparian communities are generally small and may be dominated by willows, River birch or an occasional Cottonwood. Desert Shrub communities, particularly Shadscale, occupy the lowest elevations in the eastern section of the drainage system.

Mining has been confined to the extreme upper reaches of the watershed. The approximately 330 acres of surface disturbance associated with the surface facilities of the Plateau Mine has also been confined to the upper reaches of this watershed. All of Plateau's surface disturbance is treated by maintained sediment controls.

2, 3. Mud Water Canyon Drainage

Approximately 2978 acres drains Mud Water (2) and Los Angeles Canyon (2) to join 7080 acres draining Seely, Corner, and First Water canyons (3) to form Gordon Creek of the Price River Basin. The average gradient in the headwaters of these drainages is 19 percent. Mining has occurred within the extreme headwater reaches of Mud Water (2), Los Angeles (2), and Seely canyons (3), and the South Fork of Corner Canyon (3). Presently, Mud Water, Seely and the South Fork of Corner Canyon are perennial in their lower reaches, sustained by high elevation spring flow and mine water discharge (Mud Water Canyon).

Vegetation communities of the Mud Water Canyon Drainage area include Spruce-Fir, Douglas Fir-White Fir, Aspen, Mountain Brush, Sagebrush, including both Big sage and Black sage associations, Mixed Grass - Forb communities and shrub and grass-forb dominated riparian communities on the headwater streams.

Mining has not occurred beneath any stream channels, but has been restricted to the ridges separating the drainages.

4, 5, 6, 7 & 8 Gentry Ridge Drainage

Approximately 7,777 acres drain Wild Cattle Hollow (6) and Gentry Hollow (7) to form Tie Fork Canyon (8) tributary to Huntington Creek. Approximately 5516 acres drains areas directly tributary to Huntington Creek on Nuck Woodward Canyon (4). The average gradient of Gentry (7) and Wild Cattle Hollow (6) is 13 percent. Tie Fork Canyon's gradient is 44 percent. Miscellaneous side tributaries to Huntington Creek (Pole Canyon, McElprang Canyon, Vicks Canyon, Grange Hole, Biddlecome Hollow) (5) have average gradients of 40-50 percent.

All of the ephemeral drainages are not within the range of current underground mining plans. Portions of the Gentry Hollow (7) and Wild Cattle Hollow (6) drainage areas will be mined under within current mining sequences. Portions of the Gentry Hollow drainage area have been mined under by the Hiawatha Mine. Wild Cattle Hollow's main channel will not be mined under but longwall panels of the current Plateau Mine sequence will abut the channel as the mine progresses in a southwesterly direction. Both Gentry Hollow and Wild Cattle Hollow are designated perennial creeks on the U.S. Geological Survey quadrangle map.

Vegetation communities of the Gentry Ridge Drainage area include Spruce-Fir, Douglas Fir-White Fir, Aspen, Mountain Brush, Sagebrush, including both Big sage and Black sage associations, Mixed Grass - Forb communities and a variety of riparian communities.

The latter range from Cottonwood dominated associations along Huntington Creek to narrow bands of dense fir in the bottoms of steep canyons.

9, 10, 11, 12 & 13 Bear Creek - Trail Creek Drainage

Approximately 8,876 acres of drainage contribute to Trail Canyon (9), Bear Canyon (10), and three miscellaneous tributaries to Huntington Creek (11,12,13). The average gradient of Trail and Bear Canyon is approximately 20-25 percent. The average gradient of the miscellaneous tributaries ranges from 40 to 70 percent.

Bear Creek (10) is characterized by steep gradients, narrow canyons, and large sediment loads (28,092 mg/l Total Suspended Sediments (TSS) measured during a major storm event). Trail Creek (9) is characterized by steep gradients, narrow canyons, and good water quality. Mining occurs above Trail Creek.

About 10 acres of mine surface disturbance occurs in both Bear and Trail canyons. An additional three acres are associated with the living quarters and surface facilities of Co-Op Mining Company. The Trail Canyon Mine is currently in the process of being permitted for reclamation. No future disturbance is planned for either mine, other than reclamation of the Trail Canyon site.

About 29.5 acres of disturbance in drainage area 13 is attributed to the Deer Creek Waste Rock Storage Facility. The undisturbed ephemeral surface drainage will be routed around the site and all disturbed area drainage will be treated in sediment basins.

Vegetation communities in this drainage system include Spruce-Fir, Douglas Fir-White Fir, Aspen, Mountain Brush, Sagebrush, dominated by Black sage associations, Mixed Grass - Forb communities with Salina wildrye and Bluebunch wheatgrass dominants, Pinyon - Juniper Woodlands and a variety of riparian communities including the Huntington and Trail Creek Narrowleaf Cottonwood and willow associations.

(14, 15) Cedar Creek - Fish Creek Drainage

Approximately 22,488 acres drain both the Cedar Creek (15) and Fish Creek (14) drainage areas. The average gradient of Fish Creek is 19 percent and the average gradient of Cedar Creek is 13 percent. Both Cedar Creek and Fish Creek are ephemeral drainages with Cedar Creek exhibiting perennial characteristics in certain reaches due to mine water discharge and spring flow. The Hiawatha Mines Complex permit area encompasses portions of the Right and Left of Cedar Creek. The Right Fork is ephemeral and the Left Fork exhibits perennial characteristics in certain reaches.

Vegetation communities in this drainage system include Spruce-Fir, Douglas Fir-White Fir, Aspen, Mountain Brush, Sagebrush, including both Black sage and Big sage associations, Mixed Grass - Forb communities, Pinyon-Juniper Woodlands, riparian communities which include Narrowleaf cottonwood, Sandbar willow (*Salix exigua*) and River birch (*Betula occidentalis*), and Desert Shrub communities at the lowest elevations in the southeastern section of the drainage system.

Surface facilities associated with the Mohrland Mine of U.S. Fuels Company are adjacent to Cedar Creek, and a major mine discharge of 500-1000 gpm occurs at the low point of the Mohrland Mine. Surface facilities disturb less than 25 acres of this drainage area.

(16, 17) Miller Creek - Sand Wash Drainage

Miller Creek (16) and Sand Wash (17) encompass 18,053 acres of the CIA drainage area. Miller Creek has an average gradient of 15 percent and the Sand Wash has an average gradient of 17 percent. The upper reaches of Sand Wash and the Right and Left Forks of Miller Creek contain approximately 350 acres of the surface facilities disturbance of the Hiawatha Mines. These include permanent diversion of a portion of Miller Creek to accommodate the coal processing waste pile. Miller Creek has been mined under by the Hiawatha Mines Complex. Plateau Mining Company will mine under the upper reaches of the North Fork of the Right Fork of (NFRF) Miller Creek. NFRF is perennial and therefore, the North Fork of Miller Creek is also a perennial stream, whereas the Middle Fork and Left Fork of Miller Creek are ephemeral.

Vegetation communities in this drainage system include Spruce-Fir, Douglas Fir-White Fir, Aspen, Mountain Brush, Sagebrush, including both Black sage and Big sage associations, Mixed Grass - Forb communities, and Pinyon - Juniper Woodlands. Riparian communities are generally narrow bands at the edge of intermittent and perennial streams or springs and may be dominated by willows, River birch or an occasional Cottonwood. Riparian zones of the headwaters may be distinguished from the uplands primarily by density and vigor of vegetation. Desert Shrub communities, particularly Shadscale with Slender wheatgrass, occupy the lowest elevations in the southeastern section of the drainage system.

V. POTENTIAL IMPACTS

GROUND WATER

Dewatering and subsidence related to mining have the greatest potential for impacting ground-water resources in the CIA. The impact of changes in vegetation on ground-water recharge should be minimal since mining will disturb less than 1000 acres of the 70,000 acre CIA. Disturbance of phreatophytic vegetation (primarily cottonwoods and some willow) is negligible. The impacts of coal waste disposal on water quality are discussed in the surface water section.

The Deer Creek Mine Waste Rock Storage Facility is located below the coal resource on the Masuk member of the Mancos Shale. Inasmuch as the Mancos Shale is considered a regional aquaclude, the storage facility presents a low risk for impacting ground-water resources.

Dewatering. The volume of water being discharged from mines within the CIA (1,200 gpm) approximates the amount of water that is currently being withdrawn from the ground-water system. The current and projected withdrawal values may be totalled and compared to estimates of ground-water discharge and recharge within the CIA and thereby, allow an assessment of cumulative dewatering impacts.

Approximately 37,000 acres within the CIA overlie the coal resource and represent a potential recharge area (Figure 6). Average annual precipitation is approximately 20 inches over the potential recharge area and hence, the total annual precipitation over the outcropping recharge area is 64,000 acre-feet.

Table 2A gives estimates for the total annual discharge of springs from water-bearing rock units that overlie the coal resource. Discharge also occurs directly to perennial streams where channels intersect ground water within the Blackhawk Formation and Star Point Sandstone. Table 1 identifies the ten perennial streams that occur within the CIA. Nine of these streams intersect the lower Blackhawk Formation and Star Point Sandstone. A study conducted along the NFRF Miller Creek (16) indicates streamflow substantially increased (from 8 to 115 gpm) as a result of discharge from the Blackhawk Formation and Star Point Sandstone (Plateau Mining Company PAP, page 783-40). The results from the Miller Creek study suggest the other eight perennial streams that traverse the regional aquifer also sustain ground-water discharge (or base flow recharge). Accordingly, total base flow recharge to perennial streams within the CIA is estimated to be 900 gpm.

Table 2A. Precipitation and Spring Discharge Estimates for Areas above the Coal Resource, Gentry Mountain, CIA.

Lithologic Unit(s)	Outcrop Area (Acres)	Normal Annual Precipitation on Outcrop (Acre-Feet)	Total Annual Discharge of Springs	
			Acre Feet	Percent of Normal Annual Precipitation on Outcrop
Undivided Flagstaff Limestone, North Horn Formation, Price River Formation	19,500	34,125	1,900	.05
Castlegate Sandstone	3,000	5,250	129	.02
Blackhawk Formation, Star Point Sandstone	<u>14,900</u>	<u>26,075</u>	<u>322</u>	<u>.01</u>
TOTAL	37,400	64,450	2,351	.04

Table 2B. Estimated Ground-water Discharges to Perennial Streams and Wells and from Mines, Gentry Mountain, CIA.

Discharge to Perennial Streams (9 total)	900 gpm
Discharge to Huntington Municipal Wells (3 total)	100 gpm
Discharge from mines (2 total)	<u>1,200 gpm</u>
TOTAL	2,200 gpm

Table 2C. Approximate Atmospheric Discharges from Active Mines, Gentry Mountain, CIA.

<u>Mine(s)</u>	<u>Ventilation Rate (cfm)</u>	<u>Approximate Discharge Rate (gpm)</u>
Bear Canyon	150,000	10
Star Point Mines	650,000	44
Hiawatha Mine Complex	<u>350,000</u>	<u>24</u>
TOTAL	1,150,000	88 gpm

Table 2B lists estimated ground-water discharges to perennial streams and wells and from mines. Table 2C approximates the amount of ground water discharged to the atmosphere by mine ventilation systems. Psychrometric formulas were utilized to derive ventilation discharge values and extrapolated to the mine elevations. Average relative humidity data from the Central Weather Station in the Manti-LaSal National Forest were also used in the psychrometric calculations.

Total ground-water discharge within the CIA (summed from Tables 2A, 2B, and 2C) is currently about 3,800 gpm, where 63 percent (2,400 gpm) of the total represents natural discharge to stream and springs and 34 percent (1,500 gpm) results from mining activities. The remaining 3 percent (100 gpm) may be attributed to well discharge.

Lines (1985) investigated the Trail Mountain area and indicated regional aquifer inflow to mines is derived from aquifer storage (80 percent) and aquifer discharge (20 percent). Extrapolating these percentages to the Gentry Mountain CIA (16 miles) allows depletion, due to present mining activities (7,200 acres mined) of regional aquifer storage and discharge to be estimated at 360 and 90 gpm, respectively. Assuming future mining encompasses 3,300 acres and will continue to encounter steady-state inflow from the regional aquifer, then depletion would increase to 471 gpm for storage and 118 gpm for discharge.

The Hiawatha Mines Complex has encountered major ground-water inflow associated with the Bear Canyon Fault. Diversion of flow from this conduit has altered and will continue to alter (deplete up to 1,000 gpm) recharge to the regional aquifer and, possibly, surface discharge in the Gentry Hollow area. Future development in the Hiawatha Mines Complex will retain a barrier pillar adjacent to the Bear Canyon Fault. Plateau Mining Company has proposed to access coal reserves beneath Gentry Ridge by driving a rock tunnel across the Bear Canyon Graben and associated western (unnamed) and eastern (Bear Canyon) boundary faults. Previous encounters with the Bear Canyon Fault (eastern) in the Star Point Mines have resulted in limited inflow. Data are not available to assess whether the western (unnamed) boundary fault acts as a significant groundwater conduit. A pressure grouting program will be initiated if the tunnel encounters inflow(s) that exceed 50 gpm for more than three months. Thus, tunnel development may result in a maximum diversion of flow from the two Bear Canyon boundary faults that will not exceed a total of 100 gpm.

Future mining-induced dewatering is projected to encompass 141 gpm and hence, the cumulative dewatering total would be approximately 1,650 gpm. Following the cessation of mining, the discharge of ground water to Mud Water Canyon (2), Cedar Creek (15), Miller Creek (16), and the atmosphere, will cease and workings will begin to flood.

The impact associated with the reduction in surface flow is considered temporary. Mine flooding will conceivably recharge regional aquifer storage and re-establish the natural ground-water conduit system that was operational prior to mining. The maximum time span required for complete mine flooding may be derived by assuming the final workings (10,500 acres) will remain open (average 5 foot height) and caving will not occur. Accordingly, for workings that experience inflow (Hiawatha Mines Complex, Bear Canyon Mine, Trail Canyon Mine, Star Point Mines) an upper limit of 20 years may be derived for complete mine flooding. It should be noted that complete flooding will, undoubtedly, never be achieved because the hydraulic head generated as flooding proceeds will increase until the hydraulic properties of the roof, floor and rib are exceeded and flow within the rocks initiates.

Subsidence. Subsidence impacts are largely related to extension and expansion of the existing fracture system and upward propagation of new fractures. Inasmuch as vertical and lateral migration of water appears to be partially controlled by fracture conduits, readjustment or realignment in the conduit system will inevitably produce changes in the configuration of ground-water flow. Potential changes include increased flow rates along fractures that have "opened", and diverting flow along new fractures or within permeable lithologies. Subsurface flow diversion may

cause the depletion of water in certain localized aquifers and potential loss of flow to springs that will be undermined. Increased flow rates along fractures would reduce ground-water residence time and potentially improve water quality.

Mining will occur beneath approximately 80 springs that have a combined flow in excess of 400 gpm. Overburden thickness averages more than 1000 feet beneath areas where springs are located. Diversion of spring flow is considered to be at overall low risk.

Mining will occur beneath a portion of NFRF Miller Creek where overburden thickness ranges from 500 to 825 feet. The risk for development of tension cracks within the stream channel is considered to be moderately high.

SURFACE WATER

The cumulative impacts associated with mining within the CIA will be summarized by individually discussing impacts associated with the Star Point Mines, Hiawatha Mines Complex, Bear Canyon Mine and Trail Canyon Mine and Deer Creek Mine Waste Rock Storage Facility. Creeks or drainage areas which are referenced by (#) or discussed, are shown on Figure 5, Surface Water Drainage Map.

Star Point Mines. The Plateau Mining Company's surface facilities are primarily found in Sage Brush Canyon tributary to Serviceberry Canyon (1). Sage Brush Canyon and Serviceberry Canyon flow only in response to storm events.

The coal processing waste pile (Figure 4) at the Star Point Mines is at 7,400 foot elevation, annual precipitation is 12 inches, and the vegetation surrounding the waste pile are salt desert shrub and pinyon-juniper-sagebrush communities. The waste pile is not adjacent to any perennial streams or known ground-water resources. The mine presently produces 1.2 million tons of coal annually with a capacity of four million tons. Twenty percent of the material mined is processing waste.

Table 64 of the PAP indicates waste materials are sandy or coarse in nature, with a high organic matter content and have a relatively high cation exchange capacity for coarse textured materials. To date, six waste samples have been analyzed for acid-base potential. One sample had a potential to be acid-forming. The other samples tested had excess base, which should be sufficient to neutralize drainage or seepage from areas which could potentially form acid. The alluvium which underlies the coal waste is calcareous and will also neutralize any acid drainage from the refuse.

Selenium was the only parameter tested for in the waste which had concentrations above suspect levels. This suspect concentration is .1mg/kg and is for toxicities which may occur to animals feeding on vegetation grown on this material. The suspect value which may be detrimental to water quality is not known. Selenium in the coal waste should not be a concern to water quality because drainage from the pile should be minor. The waste, although hauled to the pile in a wet form is not a slurry, and most of the water associated with the waste evaporates in the dry climate of the area.

Data given in Table 64 indicate waste could contribute slightly to increasing TDS levels in surface or ground water. The electrical conductivities of four samples were saline (greater than 4mmhos/cm²).

Although most water associated with the waste will evaporate, some water will inevitably percolate through the pile and underlying alluvial deposits. Eventually, seepage would contact the Mancos Shale and further degradation of water quality would take place. Accordingly, drainage from the waste pile would have little down gradient effect.

All surface water drainage is treated by running disturbed area drainage through sediment ponds. There are no water rights within or adjacent to the mine plan area that could be impacted by operation of surface treatment facilities. Runoff conveyance systems and treatment facilities have been designed to minimize the amount of area that is tributary to the sediment ponds. The quantity of runoff detained by sediment ponds is minimized by diversion of undisturbed waters (PAP, page 784-62).

The Plateau treatment facilities have operated in compliance with all NPDES discharge limitations except for TDS exceedence at the Mud Water Canyon Mine Water and Sediment Pond No. 8. Requests for modifications to the limits currently in effect has been made for these facilities but not yet granted by State Health and EPA. The current TDS limitation for the Mud Water Canyon (2) discharge is 650 mg/l TDS. The request to raise this limit to 1,450 mg/l (an average of the naturally occurring concentration of the Mud Water Canyon stream) has been made. The average annual flow for the period of 4/85 through 3/86 is approximately 129 gpm to Mud Water Canyon, associated with the Mine Water Discharge (PAP, page 783-46). Of 15 TDS samples taken from the Mud Water Canyon discharge in 1985, the TDS concentration varied from a low of 598 mg/l taken in late May to a high of 772 mg/l taken in late October. The sample mean was 689 mg/l with a standard deviation of 53 mg/l. TDS effluent concentrations at Pond No. 8 have been recorded as high as 3,913 mg/l on March 10, 1986. An undisturbed area sample taken on the same day near Pond No. 8 discharge was 6,024.0 mg/l. Plateau Mining Company is in the process of monitoring inflows to Pond No. 8 for a one-year period (PAP, page 784-79).

The effects of the discharge associated with Plateau Mining Company's mine water result in approximately 485.62 Tons/Yr of dissolved solids being added to the surface water system tributary to the Price River and to the Colorado River. This is based on average data for the period of 1/22/86 through 12/18/86 taken from the mine water discharge point.

Of the potential discharge locations (Treatment Facility No. 1, Ponds 2 through 8, and Mud Water Canyon discharge) only five facilities have available water quality data. These include discharges from Ponds 4, 5, 6, and 8, and Mud Water Canyon discharge.

Summary of Water Quality Data

Mean Values	Total Dissolved Solids (mg/l)	Total Suspended Solids (mg/l)	Period
Pond No. 4	1531.7	38.5	10/83-9/85
Pond No. 5	791.1	33.0	4/83-10/85
Pond No. 6	1037.2	18.5	4/83-9/85
Pond No. 8	1846.3	25.0	7/85

All four of the facilities drain to an ephemeral drainage; Serviceberry Creek (1), and then to the Price River, tributary to the Colorado River. Background TDS values for the lower parts of this drainage have been measured at 7,300 mg/l. The discharges from the ponds listed above are less than background TDS measured at Surface Water Station 10-1 in Sage Brush Canyon (1) downstream of the ponds. The average value for TDS at this station in 1985 was 1,932 mg/l. The values ranged from 599 mg/l on 6/13/85 to 3,168 mg/l on 6/27/85. The lowest TDS value is reflective of runoff occurring during a snowmelt period. Figure 14 in the Plateau PAP shows examples of this snowmelt dilution effect. The TSS data given in the above table indicates that Pond #4, 5, 6, and 8 have operated in compliance with the 70 mg/l limit identified in their NPDES permit.

Plateau Mining Company has committed to providing an adequate surface water reclamation plan for the Star Point Mine by October 1, 1987. This plan will identify the necessary measures to provide for contemporaneous reclamation of the disturbed areas preventing impacts to the quality and quantity of surface water. In addition, the use of adequate sediment controls mitigates the overall effects of mining on the surface water system. The effects of discharging mine water into the Mud Water Canyon drainage will be determined by maintaining an effective monitoring system to determine if any adverse impacts to the environment would occur and could be prevented.

As mentioned in the previous section on subsidence, the Star Point Mines will mine a portion of the headwaters of the NFRF Miller Creek (16) and the risk for development of tension cracks within the stream channel is considered to be moderately high. Because of this potential impact, the Plateau Mining Company will be required to develop a sophisticated monitoring system to detect any changes in the hydrologic regime of this stream channel during and after mining. This monitoring system will include identification of gaining and losing reaches through stream surveys and the installation of a continuous monitoring system directly below the area of potential impact.

Plateau Mining Company will use one of the following engineering methods to mitigate any change to the hydrologic regime of the NFRF Miller Creek if an impact is detected through monitoring.

1. Seal the cracks in the stream channel with bentonite or other environmentally safe materials.
2. If cracks are too large, rags or some other material will be hand placed in them at a depth of approximately two feet to provide a stop point for bentonite pellets.
3. Concrete or epoxy mixtures.
4. Surface stabilization accomplished by hand tools.

Implementation of one of these engineering methods will occur following the diversion of surface flow around the impact area by culvert, flexible fabric tubing or plastic liners and an assessment and approval of the appropriate engineering method to mitigate impact to the stream channel.

Hiawatha Mines Complex. In the vicinity of the Hiawatha Mines Complex, the CIA is dissected by two drainage systems, Miller Creek (16) and Cedar Creek (15). The drainage area for Miller Creek, above the confluence with Serviceberry Creek (1), is about 29,700 acres. Streamflow in Miller Creek is perennial from the headwaters of the NFRF Miller Creek. Cedar Creek is also a perennial stream with a drainage area of approximately 5,300 acres. Cedar Creek receives approximately 800 gpm of discharge from the old Mohrland Mine portal located south of the Hiawatha Mines Complex.

Mine water is used by U.S. Fuels Company for fire prevention and dust suppression in King 4 Mine and by the town of Hiawatha for culinary purposes. These uses are covered by water rights claimed by U.S. Fuels Company for 4,758 gpm (3,746 gpm in surface water rights and 1,012 gpm in ground-water rights). Mine water discharge from the Mohrland Mine portal is regulated under the National Pollutant Discharge Elimination System (NPDES) permit UT-0023094.

Water is piped to the town of Hiawatha (20 gpm) and coal preparation facility (545 gpm) from the mines. The Left fork of the North Fork of Miller Creek is diverted into an underground water storage reservoir that provides water for the town of Hiawatha. This water, together with the water intercepted in the mine, is stored in the mined-out section of the abandoned Hiawatha No. 2 Mine. Maximum storage volume in this underground reservoir is about 120 million gallons (368 acre-feet). Approximately 60 million gallons (184 acre-feet) are normally stored in this reservoir.

Water in excess of that used in the mining operation is routed south by gravity to the Mohrland Mine Portal where it is collected and piped to the town of Hiawatha. Excess water is discharged into Cedar Creek (15). At the town of Hiawatha there are four water storage tanks with a combined capacity of 245,000 gallons (0.75 acre-feet). Water is treated and then stored in the 40,000 gallon (0.1 acre-feet) tank 5A near the preparation plant.

Coal processing waste piles (Figure 4) at Hiawatha Mines Complex are at 7,200 feet elevation and receive 12 inches of annual precipitation. The vegetation in the refuse area is a mixed salt desert shrub community. The waste piles have been in existence since the 1940's, encompass approximately 133 acres and include 4 slurry ponds. Table XIII-11 of the PAP indicates coal waste samples are above suspect levels for selenium with concentrations ranging from 1.93 to .91 mg/kg. However, the contribution of selenium to ground or surface waters by the coal waste should have minimal effects on water quality. Any seepage from the slurry ponds would flow to Miller Creek because of its proximity and the gradient to the creek. The amount of seepage compared to the flow of Miller Creek would dilute any deleterious concentration of selenium in seepage waters. The average flow of Miller Creek is 428 gpm.

Other parameters listed in Table VIII-11 of the PAP were within acceptable limits, except for boron and iron in one sample from slurry pond 3 and 4, respectively. Boron should not pose a problem since this element is of concern in irrigated areas where toxicities can occur in crops. The water quality of adjacent Miller Creek has a high inherent salinity hazard for irrigation waters and should not be used for irrigation without intensive management. Again, the flow of Miller Creek would dilute any boron concentration in seepage water.

Iron is a product of pyrite weathering, and may indicate acid mine drainage. The pH of the sample with the high value was 7.35. At this pH, the material is still buffered and does not indicate acid-forming material. Iron at this pH is also not readily soluble, and therefore, iron should not pose a problem to receiving waters.

The coal waste was not analyzed for acid-base potential, but pH values indicate that the refuse is basic, with only one sample being neutral (pH 6.8). Existing water quality data from Miller Creek, which is adjacent to the waste pile, indicate there are no degrading effects from seepage of the coal waste piles or slurry ponds. Considering the time involved in oxidation of the waste, the calcareous nature of the soils and the buffering capacity of the water in Miller Creek, along with the alkalinity of the slurry pond water (PAP, page 81A), these factors should be great enough to neutralize any acid produced in the coal processing waste piles.

A comparison (PAP, page 81A) of slurry pond water and Miller Creek water sampled adjacent to the slurry ponds shows that the pond water is slightly higher in sulfates, iron, and TDS. Although the slurry water may degrade further with increased contact time with slurry sediments, any seepage should have little consequence on the water quality of Miller Creek. The natural quality of Miller Creek water is poor since it traverses the Mancos Shale. The contribution of salts into the Price River basin by the Mancos Shale has been well documented (Mundorff, 1972; Ponce, 1975; Laronne and Schumm, 1977).

Surface water at a higher elevation in the CIA has a low TDS concentration, usually less than 400 mg/l, and a low TSS concentration, usually less than 30 mg/l. Concentrations of dissolved sodium and chloride are usually less than 15 mg/l. The predominant dissolved chemical constituents are calcium and bicarbonate. Water quality during snowmelt runoff tends to be higher in calcium carbonate and water quality from ground-water discharge tends to have higher concentrations of magnesium and sulphate. Values of pH were fairly constant, ranging from 7.6 to 8.1.

The Utah State Board of Health has established water quality standards to protect against controllable pollution to beneficial use of water. For the Miller Creek basin (16), the pertinent water quality standards are for nongame fish (Class 3c) and irrigation of crops and stockwatering (Class 4) (Utah State Board of Health, 1978).

TDS levels of surface waters immediately below some of the active mine areas exceed the water quality standard for irrigation use, but the effects are mitigated by dilution from undisturbed surface waters. TDS concentrations in Miller Creek are within the water quality standards at the point that it flows out of the Hiawatha Mines Complex permit area; however, TDS concentrations increase about two-fold when comparing above-mining stations and below-mining stations.

Dissolved constituents continue to increase in Miller Creek as water flows across the Mancos Shale. At the junction of Miller Creek and Utah Highway 10 (about 10 miles east of the permit area), TDS concentrations average more than 3,200 mg/l, and the dominant dissolved chemical constituent is sulfate (Mundorff, 1972). The only parameter to exceed pertinent water quality standards is TDS.

The sodium adsorption ratio (SAR) for the area is low. For the headwater areas of the Miller Creek and Cedar Creek drainages, the SAR is less than 0.5. At the base of the Wasatch Plateau, the SAR values are usually between 0.8 and 2.0. On the Mancos Shale, the SAR values range between 1.0 and 4.0. Surface water derived from snowmelt flow usually has a lower SAR value, however, both sodium and SAR increase during the low flow period as streams traverse the Mancos Shale.

Both SAR and TDS combine to degrade irrigation water. All of the water in the study area exhibits a low sodium hazard for snowmelt flows, but Miller Creek at Utah Highway 10 shows a medium sodium hazard during low flow periods. This increase in TDS and SAR as streams cross the Mancos Shales is a natural nonpoint source of pollution.

TDS concentrations in surface water below the elevation of coal mining activities are higher than in areas above coal mining activities. TDS increases are associated with increases in sulfate, chloride, magnesium and sodium concentrations. Current TDS levels do not exceed any existing recommended water quality criteria for current water uses. Future mining will cause an increase in TDS concentration, but this level will also be below state and federal water quality criteria. TDS loads (i.e., concentration multiplied by flow rate) are approximately 900 tons per year from nonpoint sources associated with existing mining operations on Miller Creek. Because no new surface disturbances are proposed, the TDS load should not increase in the future. There is no current active surface mining operation on Cedar Creek, but an increase of 180 tons per year from nonpoint sources is projected in relation to future mining operations on Cedar Creek.

Water chemistry of surface waters in the CIA naturally change from a calcium carbonate type to a magnesium type as streams traverse the Blackhawk Formation and the Mancos Shale. The Mancos Shale has a significant impact on surface water quality. TDS concentrations of streams that interact the Mancos Shale area are as much as 100 times higher than TDS levels of streams that interact overlying lithologies within the CIA. Most of these increases are natural and are probably caused by rain and leaching within stream channels or ground water flowing through the formation leaching available salts from the marine shales, and discharging into the

surface waters. Impacts resulting from the surface facilities associated with mining in the CIA are overshadowed by the degradation of water quality from streams traversing the Mancos Shales.

Sulfate levels are presently below established water quality standards, and if projected estimates by the mine of sulfate increases are accurate, surface disturbances associated with the King 7 and 8 Mines will cause about a two-fold increase in sulfate concentrations. Projected sulfate concentrations will remain below water quality standards.

TSS concentrations are also higher downstream from surface facilities associated with mining. Most of the increased suspended sediment naturally settles out before Miller Creek or Cedar Creek leaves the permit area because of relatively flat stream gradients. In the Office of Surface Mining Technical Analysis a model was used to route the known water quantity and quality of Miller Creek (16) (at the town of Hiawatha) and of Serviceberry Creek (1) (near the town of Wattis) to the confluence of the two streams. According to the results of the model, the TDS concentration below the confluence of Serviceberry Creek and Miller Creek will exceed the water quality standard for irrigation use during the middle and late summer months. Most of the TDS concentration is caused by the Serviceberry Creek traversing the Mancos Shale, however.

Both concentrations of TSS and TDS are higher downstream than upstream of the mine site and can be attributed to both natural and mine-related causes. The Division considers the Mancos Shale as the major source for surface water contamination.

Bear Canyon Mine and Trail Canyon Mine. The Trail Canyon and Bear Canyon mines' surface facilities are primarily found in the Bear Creek-Trail Creek Drainage Areas (9, 10, 12). Both Trail Canyon and Bear Canyon are perennial streams which flow in response to storm events and maintain a base flow associated with perennial springs. The main concern in terms of water quality deterioration downstream is T.S.S. The TSS concentrations in Bear Creek (10) in 1984 varied from a high of 28,092 (mg/l) in May of 1984 to a low of 122 (mg/l) in September of 1984 with five monthly readings within the 1,000-2,000 mg/l range. The suspended sediment concentrations in Trail Creek (9) in 1984 varied from 1,400 mg/l in May of 1984 to a low of 1.0 mg/l in February of 1984 with seven monthly readings below 100 mg/l. These high TSS values are associated primarily with natural climatic and erosional processes, although a proportion may be attributed to removal of vegetation from roads and mine pads and normal mine operations, e.g., loading coal. Sediment controls do exist for all surface disturbances in both canyons. Therefore, the impact associated with 20 acres of mining disturbance in Trail and Bear canyons is minimized by surface controls (i.e., sediment ponds, diversion ditches, filter fences, dugout ponds, etc.).

Deer Creek Mine Waste Rock Storage Facility

The disturbance associated with Deer Creek Mine Waste Rock Storage Facility is found within Drainage Area 13. The storage facility is located in a small ephemeral basin which flows to Huntington Creek. All surface drainage is routed around the site or contained in sediment basins and not discharged. All impacts associated with this storage facility are contained on site and will not effect the natural drainage to Huntington Creek.

Pages 7-6 and 7-6.1 of the PAP indicate that the coal waste material sample is above suspect levels for salinity with an electrical conductivity averaging 5.12 mmhos/cm. However, the contribution of salinity to ground or surface water by the coal waste should have minimal effects on water quality. The salinity of the coal waste material is conducive to the native soil environment. The salinity of the native material that the waste will be backfilled onto is considered a saline sodic shale with an electrical conductivity ranging from 6.5 to 10.6 and sodium adsorption ratio ranging from 6.5 to 28.1.

VI. Summary

Mine operations within the CIA currently intercept regional aquifer (450 gpm) and fault conduit flow (1,050 gpm) at an approximate rate of 1,500 gpm. Of this total, approximately 630 gpm are consumptively lost to mine ventilation (80 gpm) and evaporation at coal preparation facilities (545 gpm). The remaining 870 gpm are discharged, without interbasin transfer of water, to streams.

Mine water discharges, with the exception of Star Point Mines, meet required effluent limitations.

Future mining operations are designed to avoid interception of fault conduit flow and accordingly, inflow from the regional aquifer is estimated to increase from 450 gpm to 591 gpm. Approximately 80 percent of the inflow will be derived from storage and 20 percent from discharge. Consumptive use is not anticipated to increase. Mine water discharge (1,350 gpm) and ventilation losses (300 gpm) will be discontinued upon cessation of mining. Concomitantly, flooding of abandoned workings will initiate. An upper limit of 20 years has been estimated for complete flooding of workings and re-establishment of the premining ground-water system.

Diversion of spring flow is considered to be at overall low risk. However, reduction in flow along the upper reach of the NFERF Miller Creek is considered to be at moderately high risk. A generalized mitigation plan has been proposed for minimizing mining-induced impacts to NFERF Miller Creek. Division approval of the method implemented to restore the stream channel will be contingent upon an assessment of the mining induced impacts.

Sediment control measures have been and will be designed and implemented to reduce and stabilize contamination of surface waters.

Following cessation of mining and coal processing, waste piles will be adequately covered with topsoil and all disturbed areas will be stabilized and revegetated to prevent surface water contamination.

Future development in the Wild Horse Ridge and Mohrland areas and/or the recommencement of mining at the Trail Canyon Mine may result in further dewatering of the ground-water system. Permitting of new development will require implementation of sediment control measures that minimize impacts to surface water.

The designs proposed for all anticipated mining operations within the CIA are herein determined to be consistent with preventing damage to the hydrologic balance outside the proposed mine plan areas.

References

- Cronquist, A., Holmgren, A.H., Holmgren, N. H., and Reveal, J. L., 1972. Intermountain Flora, Volume I. Hafner Publishing Company.
- Co-Op Mining Company, Bear Canyon Mine, Permit Application Package, 1986.
- Co-Op Mining Company, Trail Canyon Mine, Permit Application Package, 1986.
- Danielson, T. W., Re Millard, M. D., and Fuller, R. H. 1981. Hydrology of the Coal-Resources Areas in the Upper Drainages of Huntington and Cottonwood Creeks, Central Utah: U. S. Geological Survey, Water-Resources Investigations Report 81-539.
- Fenneman, N. M., 1946. Physical Divisions of the United States: U. S. Geological Survey Map, Scale 1:7,000,000.
- Larone, J. B., and Schumm, S. A., 1977. Evaluation of the Storage of Diffuse Sources of Salinity in the Upper Colorado River Basin: Completion Report No. 79. Colorado State University. Fort Collins, 111 pp.
- Lines, G., 1984. The Ground-Water System and Possible Effects of Underground Coal Mining in the Trail Mountain Area. Central Utah: U. S. Geological Survey, Open-File Report 84-067.
- Mundorff, J. D., 1972. Reconnaissance of Chemical Quality of Surface Water and Fluvial Sediment in the Price River Basin, Utah: State of Utah, Department of Natural Resources Technical Publication No. 39, 55 pp.
- Plateau Mining Company, Star Point Mines, Permit Application Package 1986.
- Ponce, S. L., and Hawkins, R. H., 1978. Salt Pickup by Overland Flow in the Price River Basin: Utah Water Resources Bulletin Volume 14, No. 5.
- U. S. Fuels Company, Hiawatha Mines Complex, Permit Application Package, 1985.

1111R/40-69
CHIA

Letters of Concurrence



Division of State History
 (Utah State Historical Society)
 Department of Community and Economic Development

Norman H. Bangertter
 Governor

Max J. Evans
 Director

300 Rio Grande
 Salt Lake City, Utah 84101-1182

*File 1571015/015 #2
 C.C. J. Montelone*

RECEIVED
 MAY 10 1988

DIVISION OF
 OIL, GAS & MINING

5 May 19988

John J. Whitehead
 Permit Supervisor/Reclamation Hydrologist
 Division of Oil, Gas & Mining
 355 West North Temple
 3 Triad Center, Suite 350
 Salt Lake City, Utah 84180-1203

RE: Initial Completeness Review, Waste Rock Storage Facility, Utah Power and Light Company, Deer Creek Mine, ACT/015/018, Folder No. 2, Emery County, Utah

In Reply Please Refer to Case No. I794

Dear Mr. Whitehead:

The staff of the Utah State Historic Preservation Office has reviewed your letter of 18 April with the attached information concerning the UP&L Deer Creek Waste Rock Storage Facility. It appears that the site of this proposed action has been surveyed by the private archeological contracting firm of AERC (87-UT-54937). It appears that no cultural resources were located by this survey, and this office would be able to concur with a determination of no historic properties for this current project.

The above is provided on request as outlined by 36 CFR 800 or Utah Code, Title 63-18-37. If you have questions or need additional assistance, please contact Charles Shepherd at (801) 533-7039, or 533-6017.

Sincerely,

for Charles M. Powell

A. Kent Powell
 Deputy State Historic Preservation Officer

CMS:I794/5483V OFR/NP



Norman H. Bangertter
Governor

Dale C. Hatch, C.P.A., J.D.
Director

Michael E. Christensen, Ph.D.
Deputy Director

State of Utah
OFFICE OF PLANNING AND BUDGET

116 State Capitol Building
Salt Lake City, Utah 84114
(801) 538-1027

file ACT/015/018 #2
cc. J. Whitehead

RECEIVED
AUG 1 1988

DIVISION OF
OIL, GAS & MINING

July 29, 1988

L. P. Braxton, Administrator
Mineral Resource Development
and Reclamation Program
Division of Oil, Gas and Mining
3 Triad Center, Suite 350
355 West North Temple
Salt Lake City, Utah 84180-1203

SUBJECT: Determination of Completeness, Waste Rock Disposal Site, Utah
Power and Light Company, Deer Creek Mine, ACT/015/018, Folder
No. 2, Emery County
State Application Identifier #UT880711-020

Dear Mr. Braxton:

The Resource Development Coordinating Committee of the State of Utah has reviewed these proposed actions. We have received no comments from potentially affected state agencies.

The Committee appreciates the opportunity of reviewing this document. Please address any other questions regarding this correspondence to Carolyn Wright (801) 538-1535.

Sincerely,

Dale C. Hatch
Director

DCH/jw



Norman H. Bangerter
Governor
Suzanne Dandoy, M.D., MPH
Executive Director
Kenneth L. Akema
Director

DEPARTMENT OF HEALTH
DIVISION OF ENVIRONMENTAL HEALTH

Bureau of Water Pollution Control
288 North 1460 West, P.O. Box 16690
Salt Lake City, Utah 84116-0690
801-539-6146

file AOT10.5/018 #2
cc. J. Whit et. al.

RECEIVED
AUG 3 1988

DIVISION OF
OIL, GAS & MINING

July 28, 1988

Utah Power and Light Company
Mining Division
P. O. Box 310
Huntington, UT 84528

Subject: Deer Creek Mine Rock Waste Storage
Facility
Sediment Basin for Area 1
Construction Permit

Gentlemen:

We have reviewed the plans and supporting documentation for the construction of a sediment basin for Area 1. The information was submitted with the Permit Application package.

The plans, as submitted, comply with the *Utah Wastewater Disposal Regulations*. A **construction permit**, as constituted by this letter, is issued, subject to the following conditions:

1. *Any modifications to the approved plans must be reviewed and approved by the Utah Water Pollution Control Committee before construction.*
2. *Facilities constructed under this permit must not be placed in service until the Bureau of Water Pollution Control has completed a final inspection, and has authorized you to do so.*
3. *Embankment must be constructed using material placed in compacted lifts on a prepared base free of roots and vegetation and good engineering practice.*

The issuance of this permit does not relieve you in any way, of obtaining applicable permits. You may contact Mr. David Ariotti, P. E., and the Southeastern District Health Department at (801) 637-3671 for compliance with any other local requirements.

If the approved project is not under construction within one year, then it will become necessary to resubmit the plans and specifications for reissuance of the construction permit.

Letter to Utah Power and Light Company
July 28, 1988
Page 2

The Sediment Basin serving *Area 1* has been designed to contain runoff resulting from two 100-year storm events (2.2 acre-feet), and sediment load resulting from one 100-year storm event (1 acre-foot). *Any discharge from this facility must be reported to the Bureau of Water Pollution Control by telephone within 24 hours, followed by a written report within five (5) days thereafter.*

A set of approved plans is returned herewith bearing our construction permit stamp. This set of plans must be kept available for examination and inspection to be conducted by a representative of the Bureau of Water Pollution Control, and for resolution of any conflicts or discrepancies in installation that may arise.

Please advise us of the beginning of the construction. This will enable us to monitor the progress and schedule periodic inspections.

Plans for the Sediment Basin serving *Area 2* will be reviewed *separately* for issuance of a construction permit. You may contact Mr. Ariotti for necessary coordination in the matter.

If we can be of further assistance in any way, please contact Mr. Ariotti, or Kiran L. Bhayani, P. E. of our staff.

Sincerely,

Utah Water Pollution Control Committee



for Don A. Ostler, P. E.
Executive Secretary

Enclosure
DA/KLB:ag

cc: Mr. John Whitehead, Division of Oil, Gas and Mining
Mr. David Ariotti, P. E., Southeastern District Engineer
Southeastern District Health Department

9106k30



State of Utah

DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

file 45/614/211

Norman H. Bangerter
Governor
Dee C. Hansen
Executive Director
Dianne R. Nielson, Ph.D.
Division Director

355 West North Temple
3 Triad Center, Suite 350
Salt Lake City, Utah 84180-1203
801-538-5340

August 25, 1988

TO: John Whitehead

FROM: Joseph C. Helfrich, Regulatory Program Coordinator *JCH*

RE: Compliance Status Review on Utah Power & Light Company's Deer Creek mine

As of the writing of this letter, Utah Power & Light Company has no NOV's or CO's which are not corrected or in the process of being corrected. Any NOV's or CO's that are outstanding are in the process of administrative or judicial review. There are no finalized Civil Penalties or AML fees which are outstanding and overdue in the name of Utah Power & light Company.

Finally they do not have a demonstrated pattern of willful violations, nor have they been subject to any bond forfeitures for any operation in the state of Utah.

re
0422Q-63



STATE OF UTAH
NATURAL RESOURCES
Water Rights

Norman H. Bangerter, Governor
Dee C. Hansen, Executive Director
Robert L. Morgan, State Engineer

Southeastern Area • 453 S. Carbon Avenue • P.O. Box 718 • Price, UT 84501-0718 • 801-637-1303

August 31, 1988

RECEIVED

SEP 6 1988

MINING DIV. S.L.C.

Utah Power & Light Company
Attn: Dave Smaldone
Director of Permitting, Compliance and Services
41 North Redwood Road
Salt Lake City, Utah 84116

Re: Reservoir Application Permit R-69
Deer Creek Mine - Rock Disposal Area

Dear Mr. Smaldone:

In response to the above referenced application, which was received in this office on August 28, 1988, please be advised that with a further review of the information submitted, our approval will not be required for this structure. Your application will be kept on file for our records. This letter will serve as notice for you to proceed with this project.

If you have any questions, please feel free to contact Rick Hall of our Salt Lake Office, or myself.

Sincerely,

Mark P. Page
Area Engineer

MPP/mjk

SOUTHEASTERN UTAH ASSOCIATION OF LOCAL GOVERNMENTS

JIMMIE WALKER
Chairman P. O. Drawer A1 • Price, Utah 84501 • Telephone 637-5444

WILLIAM D. HOWELL
Executive Director

AUG 26 1988

DIVISION OF
OIL, GAS & MINING

AREAWIDE CLEARINGHOUSE A-95 REVIEW

NOI ___ Preapp ___ App ___ State Plan ___ State Action X Subdivision ___ (ASP # 8-712-1)

Other (indicate) _____ SAI Number UT880711-020

Applicant (Address, Phone Number):

Federal Funds:
Requested: _____

Oil, Gas and Mining
355 West North Temple
3 Triad Center, Suite 350
Salt Lake City, Utah 84180-1203


Title:

WASTE ROCK STORAGE SITE FOR THE UP&L DEER CREEK MINE

- No comment
- See comments below
- No action taken because of insufficient information
- Please send your formal application to us for review. Your attendance is requested

The applicant should forward any written review comments to the funding agency. Any written response to those comments should be forwarded to the State Clearinghouse and also to the funding agency.

Comments:

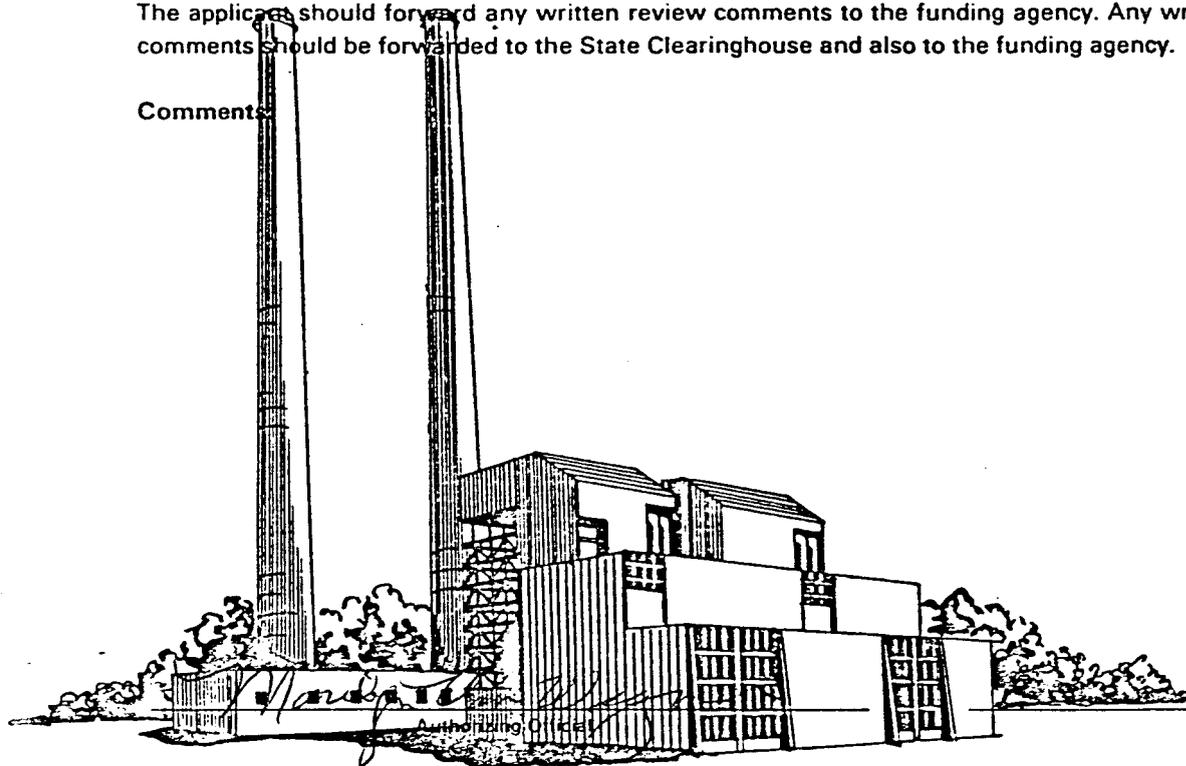

8-24-88
Date

AFFIDAVIT OF PUBLICATION

STATE OF UTAH }
County of Emery, } ss.

I, Dan Stockburger, on oath, say that I am the General Manager of the The Emery County Progress, a weekly newspaper of general circulation, published at Castle Dale, State and County aforesaid, and that a certain notice, a true copy of which is hereto attached, was published in the full issue

of such newspaper for..... Four (4) consecutive issues, and that the first publication was on the 28th day of June , 19 88

and that the last publication of such notice was in the issue of such newspaper dated the 19th day of July , 19 88


Dan Stockburger
.....

Subscribed and sworn to before me this

..... 19th day of August , 19 88

Holly Jo Baker
.....
Notary Public.

My Commission expires October 2, 1990
Residing at Price, Utah
Publication fee, \$ 57.60

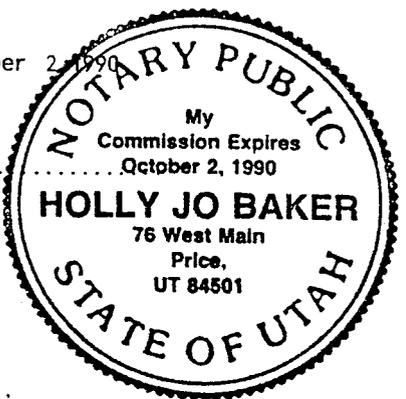

NOTICE

Utah Power & Light Company, P.O. Box 310, Huntington, Utah 84528, hereby announces its intent to file an application for the Deer Creek Waste Rock Storage Facility Permit for the Deer Creek Mine with the Division of Oil, Gas and Mining under the laws of the State of Utah.

A copy of the complete application is available for public inspection at the Emery County Recorder's Office, Emery County Courthouse, Castle Dale, Utah 84513 and also at the State of Utah, Division of Oil, Gas and Mining, 355 West North Temple, 3 Triad Center, Suite 350, Salt Lake

City, Utah 84180-1203.

Written comments on the application should be submitted to the State of Utah, Division of Oil, Gas and Mining, 355 West North Temple, 3 Triad Center, Suite 350, Salt Lake City, Utah 84180-1203.

The area to be used is contained on the U.S.G.S. 7.5-minute "Red Point" and "Hiawatha" quadrangle maps.

The approximately 52.56 acres contained in the permit area involve parts of sections 5 & 6, T17S, R8E, S.L.B.&M. Utah Power and Light Company is owner of all the land within the permit area.

Published in the Emery County Progress June 28, July 5, 12 and 19, 1988.