



December 29, 1994

Ms. Pamela Grubaugh-Littig
Permit Supervisor
Division of Oil, Gas and Mining
355 West North Temple
3 Triad Center, Suite 350
Salt Lake City, Utah 81480-1203

*Route to Karen
Open file
ACT/015/019 #6
Copy to ACT/015/017 #6*

Dear Ms. Grubaugh-Littig:

I am enclosing for submittal the 4th Quarter 1994 Engineering Inspection Reports for Deer Creek, Cottonwood/Wilberg and Des Bee Dove Waste Rock Sites. Please find also, the 4th Quarter 1994 Report of the Deer Creek Elk Canyon Storage Pad submittal.


Sincerely,

Morgan Moon

Morgan Moon
Manager Technical Services

/dw
Enclosure

cc: J. Blake Webster

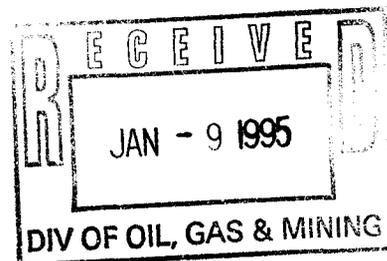

COTTONWOOD/WILBERG/DES BEE DOVE
ACT/015/019 AND ACT/015/017
4TH QUARTER 1994

INTRODUCTION

The original Waste Rock Disposal Site is located on a 16 acre right-of-way from the BLM located approximately two miles from the Cottonwood/Wilberg mine site along the east side of State Road 57.

A new disposal site was constructed during the spring and summer of 1990 on an approved right-of-way from the BLM located west of State Road 57 and 1.75 miles south of the Cottonwood/Wilberg mine site. This facility is designed for 784,000 cubic yards of material and is planned to last for the life of the mines which it serves.

OPERATION

Third quarter pond cleaning sediment was still contained in the cell established in the north end of the site. A new berm on the outslope toward the pond had been built and seeded during the 4th Quarter.

INSPECTION

The new waste storage site was inspected on December 27, 1994 for structural stability. Inspection of the operation of this facility is conducted on a continual basis. At the time of inspection, refuse covered approximately 40% of the active site.

This area does not show any signs of instability or weakness. A small seep located at the sediment pond area had minimal amount of movement.

No new rills or sluffing were observed during this inspection. North facing slopes were covered with snow.


The sediment pond and dam at the new site were inspected. No signs of instability or weakness were found. The discharge structure and emergency spillway were intact and operational according to design. The pond was covered with snow at the time of this inspection.

CERTIFICATION

I do hereby certify that the Cottonwood/Wilberg/Des Bee Dove Waste Rock Sites are constructed according to sound engineering practices, and I do also certify that there was no evidence of significant instability, structural weakness, or other hazardous conditions at the time of this inspection.




John Christensen
P.E. #165651

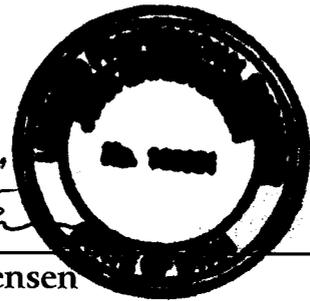



September 29, 1994

Ms. Pamela Grubaugh-Littig
Permit Supervisor
Division of Oil, Gas and Mining
355 West North Temple
3 Triad Center, Suite 350
Salt Lake City, Utah 81480-1203

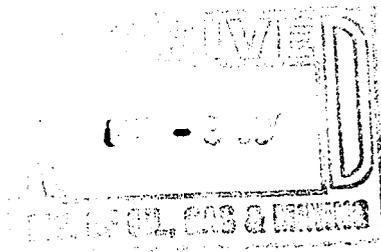

Dear Ms. Grubaugh-Littig:

I am enclosing for submittal the 3rd Quarter 1994 Engineering Inspection Reports for Deer Creek, Cottonwood/Wilberg and Des Bee Dove Waste Rock Sites. Please find also, the 3rd Quarter 1994 Report of the Deer Creek Elk Canyon Storage Pad submittal.

ACT/015/017 #6
Copy ACT/015/018 #6
ACT/015/019 #6

Sincerely,

Morgan Moon
Manager Technical Services

/dw
Enclosure

cc: J. Blake Webster

Huntington Office:
(801) 687-9821
Fax (801) 687-2695
Purchasing Fax (801) 687-9092

Deer Creek Mine:
(801) 381-2317
Fax (801) 381-2285

Cottonwood Mine:
(801) 748-2319
Fax (801) 748-2380

COTTONWOOD/WILBERG/DES BEE DOVE

*Original
to #6*

— ACT/015/019 AND ACT/015/017 (*Copy to #6*)
3RD QUARTER 1994

INTRODUCTION

The original Waste Rock Disposal Site is located on a 16 acre right-of-way from the BLM located approximately two miles from the Cottonwood/Wilberg mine site along the east side of State Road 57.

A new disposal site was constructed during the spring and summer of 1990 on an approved right-of-way from the BLM located west of State Road 57 and 1.75 miles south of the Cottonwood/Wilberg mine site. This facility is designed for 784,000 cubic yards of material and is planned to last for the life of the mines which it serves.

OPERATION

Third quarter pond cleaning sediment was still contained in the cell established in the north end of the site.

INSPECTION

The new waste storage site was inspected on September 28, 1994 for structural stability. Inspection of the operation of this facility is conducted on a continual basis. At the time of inspection, the facility was being leveled. Refuse covered approximately 25% of the active site.

This area does not show any signs of instability or weakness. Two small seeps located at the sediment pond area had minimal amounts of movement.

No new rills or sluffing were observed during this inspection.

The sediment pond and dam at the new site were inspected. No signs of instability or weakness were found. The discharge structure and emergency spillway were intact and operational according to design. The pond was dry at the time of this inspection.

CERTIFICATION


I do hereby certify that the Cottonwood/Wilberg/Des Bee Dove Waste Rock Sites are constructed according to sound engineering practices, and I do also certify that there was no evidence of significant instability, structural weakness, or other hazardous conditions at the time of this inspection.

John Christensen
John Christensen
P.E. #165651





June 29, 1994

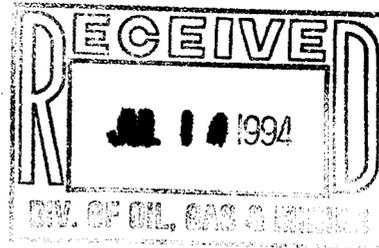

Ms. Pamela Grubaugh-Littig
Permit Supervisor
Division of Oil, Gas and Mining
355 West North Temple
3 Triad Center, Suite 350
Salt Lake City, Utah 81480-1203

Dear Ms. Grubaugh-Littig:

I am enclosing for submittal the 2nd Quarter 1994 Engineering Inspection Reports for Deer Creek, Cottonwood/Wilberg and Des Bee Dove Waste Rock Sites. Please find also, the 2nd Quarter 1994 Report of the Deer Creek Elk Canyon Storage Pad submittal.

ACT/015/017 #6
ACT/015/018 #6
~~ACT/015/019 #6~~

Sincerely,

A handwritten signature in cursive script that reads "Morgan Moon".

Morgan Moon
Manager Technical Services

/dw
Enclosure

cc: J. Blake Webster

COTTONWOOD/WILBERG/DES BEE DOVE

~~ACT/015/019~~ AND ACT/015/017

#6 2ND QUARTER 1994

Copy to #6
ACT/015/017

INTRODUCTION

The original Waste Rock Disposal Site is located on a 16 acre right-of-way from the BLM located approximately two miles from the Cottonwood/Wilberg mine site along the east side of State Road 57.

A new disposal site was constructed during the spring and summer of 1990 on an approved right-of-way from the BLM located west of State Road 57 and 1.75 miles south of the Cottonwood/Wilberg mine site. This facility is designed for 784,000 cubic yards of material and is planned to last for the life of the mines which it serves.

OPERATION

A new cell has been established in the North end of the site for sediment pond cleaning during 2nd quarter of 1994.

INSPECTION

The new waste storage site was inspected on June 29, 1994 for structural stability. Inspection of the operation of this facility is conducted on a continual basis. At the time of inspection, the facility had just been leveled. Refuse covered approximately 1% of the active site.

A new 10 ft. high refuse berm has been constructed as specified in the permit. The small seep noted in last quarters inspection had minimal movement of water. This area does not show any signs of instability or weakness.

No new rills or sluffing were observed during this inspection.

The sediment pond and dam at the new site were inspected. No signs of instability or weakness were found. The discharge structure and emergency spillway were intact and operational according to design. The pond was less than 3% full of water with minor sediment accumulation.

The old waste storage site has under gone reclamation and is complete.

CERTIFICATION

I do hereby certify that the Cottonwood/Wilberg/Des Bee Dove Waste Rock Sites are constructed according to sound engineering practices, and I do also certify that there was no evidence of significant instability, structural weakness, or other hazardous conditions at the time of this inspection.




John Christensen

John Christensen
P.E. #165651



April 15, 1994

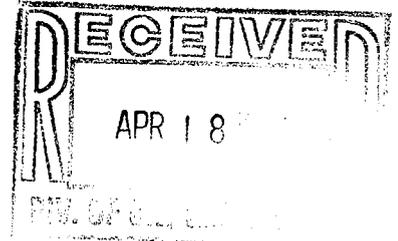

Utah Coal Regulatory Program
Division of Oil, Gas and Mining
355 West North Temple
3 Triad Center, Suite 350
Salt Lake City, Utah 84180-1203

Copy to 015/009 # 6
Copy to 015/017 # 6
Copy to 015/018 # 6
Copy to 015/019 # 6

Attention: Ms Pamela Grubaugh-Littig

**RE: ANNUAL REPORTS FOR 1993, PACIFICORP, DES BEE DOVE MINES,
ACT/015/017, DEER CREEK MINE, ACT/015/018,
COTTONWOOD/WILBERG MINE, ACT/015/019, TRAIL MOUNTAIN MINE,
ACT/015/009, EMERY COUNTY, UTAH**

Dear Ms Grubaugh-Littig:

Transmitted herewith, please find one (1) copy of the Annual Reports for the above referenced PacifiCorp operations. The materials are organized as in previous years.

Please allow an extension of forty-five days for submittal of the Hydrologic and Subsidence Monitoring reports. As I discussed with you earlier this week, these two reports will be completed by May 31, 1994.

If you have questions regarding this information, please call me at 653-2312.

Sincerely,

Val Payne
Val Payne
Sr. Environmental Engineer

Talked to Val 4/15/94
Monitoring done, report not.

/vp
Enclosure

Pgl 4/18/94

cc: M. Moon
B. Webster
File



March 31, 1994

Ms. Pamela Grubaugh-Littig
Permit Supervisor
Division of Oil, Gas and Mining
355 West North Temple
3 Triad Center, Suite 350
Salt Lake City, Utah 81480-1203

*File and/or Copy to
ACT/015/017 #6
ACT/015/018 #6
ACT/005/019 #6*


Dear Ms. Grubaugh-Littig:

I am enclosing for submittal the 1st Quarter 1994 Engineering Inspection Reports for Deer Creek, Cottonwood/Wilberg and Des Bee Dove Waste Rock Sites. Please find also, the 1st Quarter 1994 Report of the Deer Creek Elk Canyon Storage Pad submittal.

Sincerely,

A handwritten signature in cursive script that reads "Morgan Moon".

Morgan Moon
Manager Technical Services

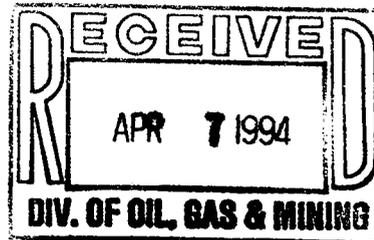

/kl
Enclosure

cc: J. Blake Webster
File

COTTONWOOD/WILBERG/DES BEE DOVE
ACT/015/019 AND ACT/015/017 *Comp*
1st QUARTER 1994

ACT/015/017 #6
ACT/015/019
#6

INTRODUCTION

The original Waste Rock Disposal Site is located on a 16 acre right-of-way from the BLM located approximately two miles from the Cottonwood/Wilberg mine site along the east side of State Road 57.

A new disposal site was constructed during the spring and summer of 1990 on an approved right-of-way from the BLM located west of State Road 57 and 1.75 miles south of the Cottonwood/Wilberg mine site. This facility is designed for 784,000 cubic yards of material and is planned to last for the life of the mines which it serves.

OPERATION

Both sediment pond cleanout material cells have dried and been incorporated into existing waste rock material.

A new cell has been established in the North end of the site for sediment pond cleaning during 2nd quarter of 1994.

INSPECTION

The new waste storage site was inspected on March 31, 1994 for structural stability. Inspection of the operation of this facility is conducted on a continual basis. At the time of inspection, the facility had just been leveled. Refuse covered approximately 10% of the active site.

A new 10 ft. high refuse berm has been constructed as specified in the permit. The small seep noted in last quarters inspection had minimal movement of water. This area does not show any signs of instability or weakness.

No new rills or sluffing were observed during this inspection.

The sediment pond and dam at the new site were inspected. No signs of instability or weakness were found. The discharge structure and emergency spillway were intact and operational according to design. The pond was less than 5% full of water with minor sediment accumulation.

The old waste storage site has under gone reclamation and is complete.

CERTIFICATION

I do hereby certify that the Cottonwood/Wilberg/Des Bee Dove Waste Rock Sites are constructed according to sound engineering practices, and I do also certify that there was no evidence of significant instability, structural weakness, or other hazardous conditions at the time of this inspection.



John Christensen

John Christensen
P.E. #165651

DEER CREEK #6 AC
ACT/015/018
ORIGINAL WASTE ROCK DISPOSAL SITE
1st QUARTER 1994

INTRODUCTION

The original site is located on the northeast end of the material storage yard and now serves as an area for material storage. Its storage capacity is approximately 90,000 cubic yards.


OPERATION

This site is at its capacity. No new waste rock material was added.

INSPECTION

During the inspection of the site on March 31, 1994 no evidence of fractures, slumps or instability were observed. The top berm was intact and functional. No rills or gullies. Some vegetation on the South and East slope.

A damp area was observed at the toe of the waste rock slope.

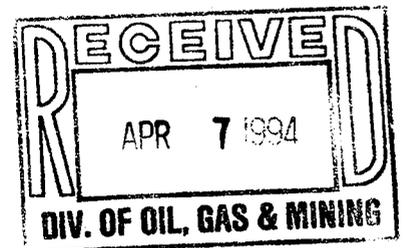

DEER CREEK #6
ACT/015/018
WASTE ROCK DISPOSAL SITE
1st QUARTER 1994

INTRODUCTION

This area for waste rock storage is located approximately 2.5 miles from the mine site in Huntington Canyon, more specifically in Sections 5 and 6, T17S, R8E, SLM. When complete the site will contain approximately 1.3 million cubic yards of waste rock.

OPERATION

Refuse piles have been leveled in lifts according to plan with trash and extraneous material sorted according to the permitted plan.

INSPECTION


Inspection of the facility for structural stability was performed March 31, 1994. Inspection of the operation of the facility is done on a continual basis.

The underdrain was discharging at the time of the inspection with perceptible movement.

The perimeter berm appears to be stable. Minor erosion down the slopes in a few locations. Minor settlement fractures on outslope of west berm, also inslope at southwest corner berm.

The detention basin and spillway were also inspected for any signs of weakness or instability. No signs of instability or weakness were observed in or around the basin or spillway.

The site had recently been leveled and refuse had been hauled in the east side covering approximately 10% of the active site.

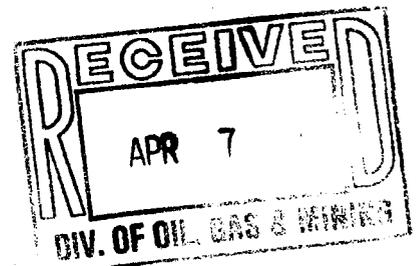


CERTIFICATION

I do hereby certify that the waste rock sites for the Deer Creek Mine are constructed and maintained as designed and in accordance with the approved plan and Utah Coal Mining Rules. I do also certify that there is no evidence of instability, structural weakness, or other hazardous conditions within the sites.



John Christensen

John Christensen
PE #165651

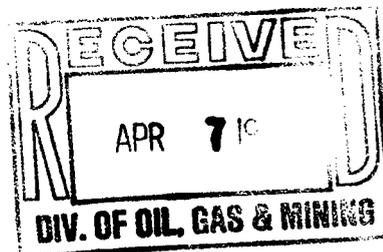

DEER CREEK
ACT/015/018
ELK CANYON STORAGE PAD
1st QUARTER 1994

INTRODUCTION

The Elk Canyon Storage Pad was modified in 1988 to provide additional storage space for run of mine coal. The fill structure was constructed of underground development waste and coal processing waste. An estimated 24,000 cubic yards of material were used to construct the fill pad.

OPERATION

ROM coal was occasionally stored on the pad for short periods of time. About 100 tons of coal was being stored on the pad at the time of this inspection.

INSPECTION

During an inspection of the site on March 31, 1994, no tension fractures or other evidence of failure were observed. No evidence of structural weakness or other hazardous conditions were noticed.

CERTIFICATION

I do hereby certify that the Elk Canyon Storage Pad is constructed and maintained as designed and in accordance with the approved plan. I also certify that the facility shows no signs of instability, structural weakness or other hazardous conditions.



John Christensen
John Christensen
PE #165651



December 28, 1993

RECEIVED

JAN 03 1994

Ms. Pamela Grubaugh-Littig
Permit Supervisor
Division of Oil, Gas and Mining
355 West North Temple
3 Triad Center, Suite 350
Salt Lake City, Utah 81480-1203

DIVISION OF
OIL, GAS & MINING

Route to Mad Jess then file

ACT/015/019 #6

Dear Ms. Grubaugh-Littig:

I am enclosing for submittal the 4th Quarter 1993 Engineering Inspection Reports for Deer Creek, Cottonwood/Wilberg and Des Bee Dove Waste Rock Sites. Please find also, the 4th Quarter 1993 Report of the Deer Creek Elk Canyon Storage Pad submittal.

Sincerely,

A handwritten signature in cursive script that reads "Morgan Moon".

Morgan Moon
Manager Technical Services

/dw
Enclosure

cc: J. Blake Webster
File

DEER CREEK
ACT/015/018
ORIGINAL WASTE ROCK DISPOSAL SITE
4TH QUARTER 1993

#6

Route to Ken ad
Jes then file

INTRODUCTION

The original site is located on the northeast end of the material storage yard and now serves as an area for material storage. Its storage capacity is approximately 90,000 cubic yards.

OPERATION

This site is at its capacity. No new waste rock material was added.

INSPECTION

During the inspection of the site on December 28, 1993 no evidence of fractures, slumps or instability were observed. The top berm was intact and functional. No rills or gullies. Good vegetation on the south slope. Excellent vegetation established on the east slope. Approximately 1 inch of snow covered the area.

No damp/icy areas were observed.

This one needs
certification.

1/4

Jes

DEER CREEK
ACT/015/018
WASTE ROCK DISPOSAL SITE
4TH QUARTER 1993

INTRODUCTION

This area for waste rock storage is located approximately 2.5 miles from the mine site in Huntington Canyon, more specifically in Sections 5 and 6, T17S, R8E, SLM. When complete the site will contain approximately 1.3 million cubic yards of waste rock.

OPERATION

Refuse piles have been leveled in lifts according to plan with trash and extraneous material sorted according to the permitted plan.

INSPECTION

Inspection of the facility for structural stability was performed December 28, 1993. Inspection of the operation of the facility is done on a continual basis.

The underdrain was discharging at the time of the inspection considerably less than 1 gpm.

The perimeter berm appears to be stable. Minor erosion down the slopes in a few locations. Minor settlement fractures on outslope of west berm, also inslope at southwest corner berm.

The detention basin and spillway were also inspected for any signs of weakness or instability. The basin had some ice built up in its center. No signs of instability or weakness were observed in or around the basin or spillway.

Refuse had been hauled in and covered about 60% of active site at the date of this inspection.

CERTIFICATION

I do hereby certify that the waste rock sites for the Deer Creek Mine are constructed and maintained as designed and in accordance with the approved plan and Utah Coal Mining Rules. I do also certify that there is no evidence of instability, structural weakness, or other hazardous conditions within the sites.



A handwritten signature in black ink, appearing to read "Steven E. Kochevar", written over a horizontal line.

Steven E. Kochevar
PE #171933

DEER CREEK
ACT/015/018
ELK CANYON STORAGE PAD
4TH QUARTER 1993

INTRODUCTION

The Elk Canyon Storage Pad was modified in 1988 to provide additional storage space for run of mine coal. The fill structure was constructed of underground development waste and coal processing waste. An estimated 24,000 cubic yards of material were used to construct the fill pad.

OPERATION

ROM coal was occasionally stored on the pad for short periods of time. About 75 tons of coal was being stored on the pad at the time of this inspection.

INSPECTION

During an inspection of the site on December 28, 1993, no tension fractures or other evidence of failure were observed. No evidence of structural weakness or other hazardous conditions were noticed. Pad was covered with 1 inch of snow.

CERTIFICATION

I do hereby certify that the Elk Canyon Storage Pad is constructed and maintained as designed and in accordance with the approved plan. I also certify that the facility shows no signs of instability, structural weakness or other hazardous conditions.



Steven E. Kochevar
PE #171933