


GENWAL COAL COMPANY

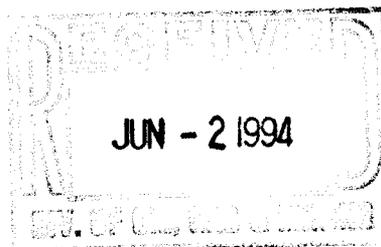

June 1, 1994

Mr. Daron Haddock
 Division of Oil, Gas & Mining
 3 Triad Center, Suite 350
 355 West North Temple
 Salt Lake City, UT 84180-1203

RE: Permit #ACT 015-032
 Crandall Canyon Mine

Submittal to the currently approved Mine and Reclamation Plan to incorporate shotcreting to the highwall along the Portal road.

File 94D

Dear Mr. Haddock:

Please find enclosed for your approval fourteen (14) copies of Plate 5-3, the Surface Facility map. This new revision, dated 5/31/94, shows the extent of the proposed shotcrete to cover the cut slope to the north of the Portal road.

It is proposed that a 4" square wire mesh will be used, being space approximately 1 1/2" to 3" away from the existing slope. The wire mesh will be secured to the slope with standard metal clips. 2" PVC pipe, perforated for drainage, will be inset 2 to 3 feet into the slope at two different elevations, approximately 6" to 12" from the bottom of the project and 12" to 24" from the top of the project. These pipes will be spaced 6 to 10 feet apart for the entire length of the project. 4" to 6" of shotcrete will then be sprayed onto the wire mesh.

Should you have any questions or need additional information, please contact me at 687-9813.

Sincerely,
 GENWAL COAL COMPANY

Larry W. Johnson
 Larry W. Johnson