

m/003/016



United States
Department of
Agriculture

Forest
Service

Sawtooth
National
Forest

Burley/Twin Falls Ranger
District
3650 South Overland Ave.
Burley, Id. 83318-3242
(208) 678-0430
(208) 737-3200

File Code: 2810

Date: March 17, 1999

William Bown
842 West 400 North
West Bountiful, Utah 84087

CERTIFIED, RETURN RECEIPT RE-
QUESTED

Dear Bill,

I am giving you formal notice that your operations at Dove Creek and Lynn Springs are in non-compliance. The noncompliance is the lack of approved Plan of Operations and sufficient bonds for the Dove Creek and Lynn Springs quarries. The Plans of Operation you have submitted for both operations can be approved as soon as sufficient bonds have been provided. You have 30 days to provide bonds adequate to cover reclamation work at each quarry. The 30 day time will start when the area of operations are accessible. Until the noncompliance is corrected no material may be removed or any earth work be done.


Our files for the two operations contain copies of 1998 bonding letters to you from the Utah Division of Oil Gas and Mining. This office did participate in calculation of bond amounts contained in these letters. The Dove Creek operation requires a bond of \$24100. The Lynn Springs operation bond is \$17900. (see attached bond calculations)

If you have any questions, please contact Gordon Struthers at this office.

Sincerely,

PETE PETERSON
District Ranger

cc Lynn Kunzler, Utah DOGM

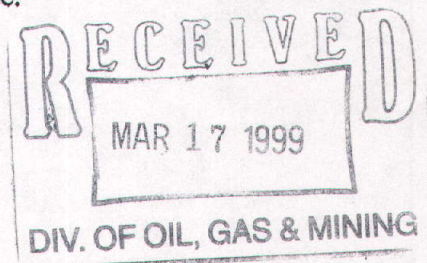

Caring for the Land and Serving People

Printed on Recycled Paper



1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

RECLAMATION SURETY ESTIMATE

Utah Building Stone Supply

Dove Creek Quarry

M/003/016

Box Elder County

Prepared by Utah State Division of Oil, Gas & Mining

last revision 10/19/98

filename m03-16.wb2

-This estimate uses a D9 size dozer for most earthwork & unit costs from the generic estimate she

Acreages used in this estimate are taken from Summary A received 5/1/98

-All quarry areas are assumed to require regrading

-Camp areas will be regraded

-Approximately 7.8 acres of quarry area will require substitute soil materials (composted manure)

-Approximately 3.3 acres of quarry area will receive six inches of topsoil cover

-Approximately 5.71 acres of roads will require ripping

-All surface disturbances (11.10 quarry + 0.25 camp + 5.71 roads) will require broadcast seeding

-Trailer & associated debris near Blue Trailer Camp to be removed from the site

-Portions of the site disturbances are located on USFS lands

Note: actual unit costs may vary according to site conditions last unit cost update 10/12/98

-Amount of disturbed area which will receive reclamation treatments = 17.1 acres

-Estimated total disturbed area for this mine = 17.1 acres

Activity	Quantity	Units	\$/unit	\$	Note
Removal of trailer & debris - near blue trailer camp	1	sum	2,000	2,000	(01)
Regrading campsite areas	0.3	acre	350	88	(2)
Regrading quarry areas	11.1	acre	560	6,216	(3)
Ripping access roads - dozer	5.7	acre	260	1,485	(4)
Topsoil replacement - dozer	2,735	CY	0.35	957	(3)
Composted manure	7.8	acre	300	2,340	(05)
Broadcast seeding	17.1	acre	170	2,907	(06)
General site cleanup & trash removal (50% total site)	8.5	acre	50	425	(07)
Equipment mobilization	1	equip	1,000	1,000	(08)
Reclamation Supervision	6	days	363	2,178	(9)
		Subtotal		19,595	
10% Contingency				1,960	
		Subtotal		\$21,555	
Escalate for 5 years at 2.24% per yr				2,525	
		Total		\$24,080	

Note	
(01)	DOGM estimate
(2)	Means 1998 & Blue Book 4/98: Cat D9N, U, mtl 2550 lb/CY, 50 ft push, 1 ft depth
(3)	Means 1998 & Blue Book 4/98: Cat D9N, U, mtl 2550 lb/CY, 100 ft push, 1 ft depth
(4)	Means 1998 & Blue Book 4/98: Cat D9N, U, multi shank rippers, speed 1.0 mph
(3)	Means 1998 & Blue Book 4/98: Cat D9N, U, mtl 2550 lb/CY, 100 ft push
(05)	DOGM general estimate - manure \$16/ton delivered, \$14 ton/acre spreading
(06)	DOGM general estimate - broadcast seeding
	DOGM general estimate - site cleanup & trash removal
	DOGM general estimate - equipment mobilization
(9)	Means 1998, 010-036-0180, project manager, minimum \$1,815/wk

RECEIVED
MAR 17 1999
DIV. OF OIL, GAS & MINING