



United States
Department of
Agriculture

Forest
Service

Sawtooth
National
Forest

m/003/025
Burley/Twin Falls Ranger
District
3650 South Overland Ave.
Burley, Id. 83318-3242
(208) 678-0430
(208) 737-3200

File Code: 2810

Date: March 17, 1999

William Bown
842 West 400 North
West Bountiful, Utah 84087

CERTIFIED, RETURN RECEIPT RE-
QUESTED

Dear Bill,

I am giving you formal notice that your operations at Dove Creek and Lynn Springs are in non-compliance. The noncompliance is the lack of approved Plan of Operations and sufficient bonds for the Dove Creek and Lynn Springs quarries. The Plans of Operation you have submitted for both operations can be approved as soon as sufficient bonds have been provided. You have 30 days to provide bonds adequate to cover reclamation work at each quarry. The 30 day time will start when the area of operations are accessible. Until the noncompliance is corrected no material may be removed or any earth work be done.


Our files for the two operations contain copies of 1998 bonding letters to you from the Utah Division of Oil Gas and Mining. This office did participate in calculation of bond amounts contained in these letters. The Dove Creek operation requires a bond of \$24100. The Lynn Springs operation bond is \$17900. (see attached bond calculations)

If you have any questions, please contact Gordon Struthers at this office.

Sincerely,

PETE PETERSON
District Ranger

cc Lynn Kunzler, Utah DOGM

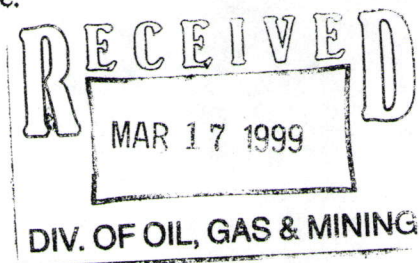

Caring for the Land and Serving People

Printed on Recycled Paper



1	RECLAMATION SURETY ESTIMATE				
2	Utah Building Stone Supply Company		last revision 04/20/98		
3	Lynn Spring Quarry		filename m03-25.wb2	page "ESTIMATE"	
4	M/003/025		Box Elder County		
5	Prepared by Utah State Division of Oil, Gas & Mining				
6					
7	<i>- No buildings or permanent structures are proposed</i>				
8	<i>- Mine access roads will be ripped, water barred, & broadcast seeded</i>				
9	<i>- The Work area (0.5ac) and Millsite area (1.0ac.) will be ripped, topsoil replaced & broadcast seeded</i>				
10					
11					
12	<i>- Total affected area = millsite, work area, quarry areas, roads = 1 + 0.5 + 5.1 + 2.4 = 9.0 acres</i>				
13	<i>- Total disturbed area requiring reclamation = 9.0 acres</i>				
14					
15	<i>- Approximately 3.5 acres of quarry and work area to be reclaimed the spring of 1998</i>				
16	<i>- Bond could be reduced by \$6,100 if 3 acres of quarry (north quarry)</i>				
17	<i>and 0.5 acres work area are reclaimed prior to permit approval.</i>				
18					
19					
20	- Amount of disturbed area which will receive reclamation treatments				9.0 acres
21	<u>Activity</u>	<u>Quantit</u>	<u>Units</u>	<u>\$/unit</u>	<u>\$</u>
22					Note
23					
24	Ripping work area and millsite area	1.5	acre	269	404 (1)
25	Ripping access roads - dozer	2.4	acre	269	646 (1)
26	Regrading quarry areas - dozer	4,200.0	CY	1.1	4,620 (2)
27					
28	Topsoil replacement - 6 inches	7,200	CY	0.46	3,312 (3)
29					
30	Broadcast seeding (9.0 acres)	9.0	acre	170	1,530 (4)
31	Reseeding -broadcast seeding (~25% of area)	2.5	acre	170	425 (4)
32					
33					
34	General site cleanup & trash removal	9.0	acre	50	450 (5)
35					
36	Equipment mobilization - Burley, Idaho closest city	2	equip	700	1,400 (6)
37					
38	Reclamation Supervision	5	days	356	1,780 (7)
39					
40					
41					
42					
43					
44					
45					

RECLAMATION SURETY ESTIMATE - NOTES	
Note	
(1)	Means 1997 & Rental Rate Blue Book 4/97: Cat D8N, U, multi shank rippers, speed 0.8 mph
(2)	US Forest Service general estimate
(3)	Means 1997 & Rental Rate Blue Book 4/97: Cat D8N, U, mtl 2550 lb/CY, 100 ft push
(4)	DOGM general estimate - broadcast seeding
(5)	DOGM general estimate - site cleanup & trash removal
(6)	DOGM general estimate - equipment mobilization
(7)	Means 1997, 010-036-0180, project manager, minimum \$1780/wk

RECEIVED
MAR 17 1999
DIV. OF OIL, GAS & MINING