

B & W Construction

Excavation and Reclamation

April 15, 1983

File
ACT/037/050
Red Rock Mine
S & S Mining

Division of Oil, Gas and Mining
S & S Mining
TS&R Mining
First Western National Bank

TO WHOM IT MAY CONCERN:

After making an updated onsite inspection of the surface disturbances at the Red Rock Mine site on April 15, 1983, I would like to make the following cost analysis for the reclamation of the mine site, drill roads and sites, main access road (from mine gate to the mine site), ventilation hole pads and water ponds:

- A. Remove the existing buildings and structures along with all trash and debris. \$2,500.00
- B. Remove waste material from wash and place over the mine portal (Approximately 3000 yards). \$3,000.00
- C. Recontour all drill roads and sites (including access road to mine) as completely as practical (all cuts and slopes to be stabilized to reduce the erosion factor). Reopen all existing drainages that may have been blocked during the construction stages. Remove existing ponds (excluding the cost or removal of any radioactive sediments until the quantity is determined) and recontour pond sites.
- D. Redistribute surface soil along with trees, brush, rocks, etc., to make it look as natural as practical. \$6,000.00 (incl'dg. C)
- E. Prepare surface (approximately 9 acres) for reseeding by means of discing or cultivation, Broadcasting of seed (seed to be certified and broadcast at a rate prescribed by governmental agency), chain harrowed to cover seed (cost of seed included). \$2,000.00

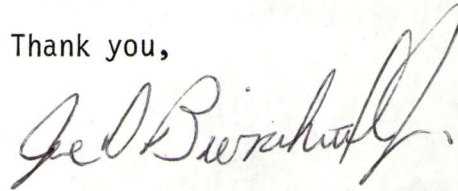
B & W Construction

Excavation and Reclamation

Page 2

This cost estimate is based on methods and practices that produce results that are acceptable to most governmental agencies.

Thank you,

A handwritten signature in dark ink, appearing to read "Joe D. Bierschied, Jr.", written in a cursive style.

Joe D. Bierschied, Jr.

JDB:cs