



Canyon Fuel
Company, LLC.
Skyline Mine

A Subsidiary of Arch Western Bituminous Group, LLC.

C/007/005 Incoming
CC: Steve S.

#3549

R

Gregg Galecki, Environ. Engineer
HCR 35, Box 380
Helper, UT 84526
(435) 448-2636 - Office
(435) 448-2632 - Fax

May 23, 2010

Mr. Daron R. Haddock
Division of Oil, Gas, and Mining
1594 West North Temple
Salt Lake City, Utah 84114-5801

RE: Response to Informal Conference (June 14, 2010), Winter Quarters Ventilation Facility (WQVF), Canyon Fuel Company, LLC, Skyline Mine, C/007/005,

Dear Daron:

Attached to this letter is pertinent information in response to information requested during the Informal Conference conducted on June 14, 2010, concerning noise associated with the fan proposed at the Winter Quarters Ventilation Facility (WQVF).

A letter from Mr. Wesley Sorensen addressed to Mr. Steve Schneider identifies types of commercially available technology available to reduce fan noise. The Tetra Tech report provides a sound survey that documents fan noise at various distances for the current Skyline Mine fan and background sounds in Winter Quarters.

Attached to this cover letter are completed C1 and C2 (two-pages) forms, and the information described above.

If you have any questions regarding this information, please give me a call at (435) 448-2636.

Sincerely:

Gregg A. Galecki
Canyon Fuel Company, LLC.
Environmental Engineer – Skyline Mines

Enclosures

RECEIVED

JUL 01 2010

DIV. OF OIL, GAS & MINING

APPLICATION FOR COAL PERMIT PROCESSING

Permit Change New Permit Renewal Exploration Bond Release Transfer

Permittee: Canyon Fuel Company, LLC

Mine: Skyline Mine

Permit Number: C/007/005

Title: Supplemental Information from Winter Quarters Ventilation Facility Informal Conference

Description, Include reason for application and timing required to implement:

Requested information from Informal Conference 6/14/10.

Instructions: If you answer yes to any of the first eight (gray) questions, this application may require Public Notice publication.

- Yes No 1. Change in the size of the Permit Area? Acres: _____ Disturbed Area: _____ increase decrease.
- Yes No 2. Is the application submitted as a result of a Division Order? DO# _____
- Yes No 3. Does the application include operations outside a previously identified Cumulative Hydrologic Impact Area?
- Yes No 4. Does the application include operations in hydrologic basins other than as currently approved?
- Yes No 5. Does the application result from cancellation, reduction or increase of insurance or reclamation bond?
- Yes No 6. Does the application require or include public notice publication?
- Yes No 7. Does the application require or include ownership, control, right-of-entry, or compliance information?
- Yes No 8. Is proposed activity within 100 feet of a public road or cemetery or 300 feet of an occupied dwelling?
- Yes No 9. Is the application submitted as a result of a Violation? NOV # _____
- Yes No 10. Is the application submitted as a result of other laws or regulations or policies?
Explain: _____
- Yes No 11. Does the application affect the surface landowner or change the post mining land use?
- Yes No 12. Does the application require or include underground design or mine sequence and timing? (Modification of R2P2)
- Yes No 13. Does the application require or include collection and reporting of any baseline information?
- Yes No 14. Could the application have any effect on wildlife or vegetation outside the current disturbed area?
- Yes No 15. Does the application require or include soil removal, storage or placement?
- Yes No 16. Does the application require or include vegetation monitoring, removal or revegetation activities?
- Yes No 17. Does the application require or include construction, modification, or removal of surface facilities?
- Yes No 18. Does the application require or include water monitoring, sediment or drainage control measures?
- Yes No 19. Does the application require or include certified designs, maps or calculation?
- Yes No 20. Does the application require or include subsidence control or monitoring?
- Yes No 21. Have reclamation costs for bonding been provided?
- Yes No 22. Does the application involve a perennial stream, a stream buffer zone or discharges to a stream?
- Yes No 23. Does the application affect permits issued by other agencies or permits issued to other entities?

Please attach four (4) review copies of the application. If the mine is on or adjacent to Forest Service land please submit five (5) copies, thank you. (These numbers include a copy for the Price Field Office)

I hereby certify that I am a responsible official of the applicant and that the information contained in this application is true and correct to the best of my information and belief in all respects with the laws of Utah in reference to commitments, undertakings, and obligations, herein.


Wesley K Sorenson
Print Name

Wesley K Sorenson
Sign Name, Position, Date
General Manager 6/23/10

Subscribed and sworn to before me this 23rd day of JUNE, 2010

Kathleen Atwood
Notary Public

My commission Expires: 11-12, 2011
Attest: State of Utah } ss:
County of Carbon

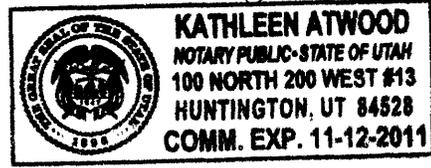

For Office Use Only: 	Assigned Tracking Number: 	Received by Oil, Gas & Mining <div style="font-size: 24pt; font-weight: bold; margin: 10px 0;">RECEIVED</div> <div style="font-size: 24pt; font-weight: bold; margin: 10px 0;">JUL 01 2010</div> <div style="font-weight: bold; margin: 10px 0;">DIV. OF OIL, GAS & MINING</div>
---	--	--



**Canyon Fuel
Company, LLC**

A Subsidiary of Arch Western Bituminous Group, LLC.

Skyline Mine

Wesley K. Sorensen
General Manager
HC35, Box 380
Helper, Utah 84526
(435) 448-2619
Fax (435) 448-2632

June 23, 2010

Mr. Steve Schneider
Utah Coal Regulatory Program
Division of Oil, Gas and Mining
1594 West North Temple, Suite 1210
P. O. Box 145801
Salt Lake City, Utah 84114-5801

Dear Mr. Schneider:


Skyline Mine committed to supply more information to Mr. Liodakis in the June 14, 2010 Informal Conference in which you served as Conference Officer. The information in the following paragraph should help to alleviate the adjacent land owners concern regarding noise reduction at the Winter Quarter Mine Fan.

Skyline Mine is planning to install an exhausting mine fan in Winter Quarters Canyon on the permitted pad area in T 13S R6E, Section 1. This fan will be of the axial design with an external motor and motor house and will likely be a 10 ft diameter class fan. The fan will be on a vertical shaft some 300 ft deep and will be equipped with the best commercially available technology for reducing noise. This technology will include sound damping of the duct work and associated motor house as well as sound absorption materials within the motor house. If reflective sound cancelation is appropriate to reduce the noise level of the fan it will also be used. The discharge evase` of the fan will most likely be in a vertical arrangement to minimize noise levels in the immediate area of the fan. It should be noted that noise levels die off according to the inverse square of the distance from the source. Existing mine fans in the area without best commercially available noise reduction technology have noise levels less than 60dBA 400 meters away from the fan. Normal conversation level is 60 dBA.

Our existing lease with Liodakis allows for this type of impact.

Sincerely,

Wesley K. Sorensen
General Manager

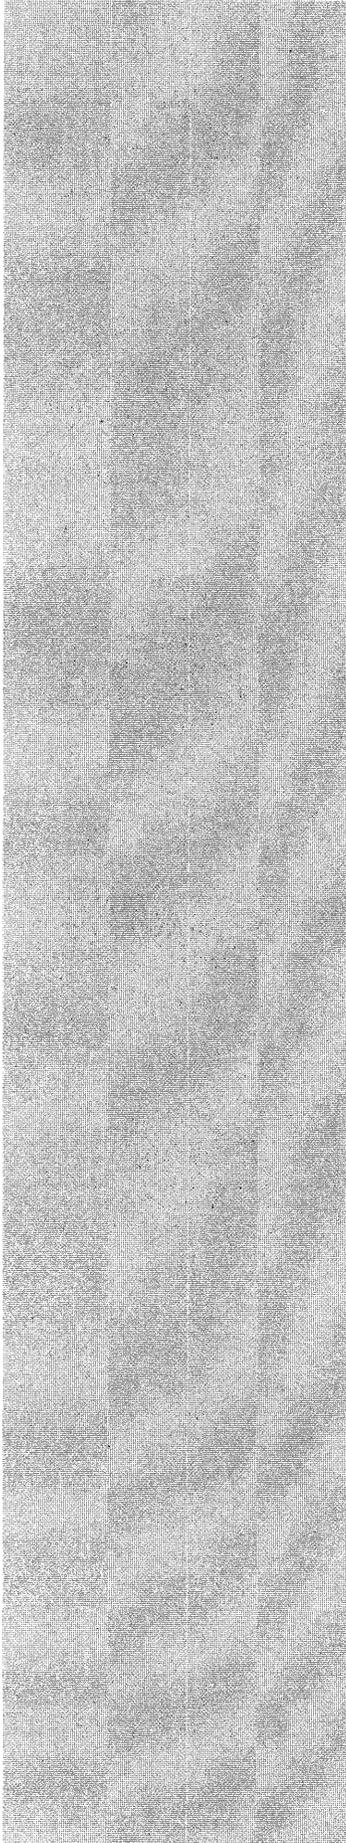

Skyline Mine Sound Study

Prepared for:

**Dorsey & Whitney LLP
And
Canyon Fuel Company, Skyline Mine**

Prepared by:

Tetra Tech

*136 East South Temple, Suite 910
Salt Lake City, UT 84111
(801) 364-1064
Fax (801) 364-2021*

June 23, 2010

TABLE OF CONTENTS

1.0 INTRODUCTION	1
2.0 METHODS	1
2.1 Sound Monitoring Locations	1
2.2 Sound Monitoring Methods.....	1
3.0 RESULTS	2
3.1 Existing Ventilation Fan	3
3.2 Proposed Ventilation Fan	5
4.0 SUMMARY	6
4.1 Existing Ventilation Fan	6
4.2 Proposed Ventilation Fan	6

LIST OF GRAPHS

Graph 1: Sound Levels Measured at Existing Skyline Mine and Average Background Sound Measured in Winter Quarters Canyon.....	4
--	---

LIST OF TABLES

Table 1: Sound Monitoring Data.....	2
-------------------------------------	---

FIGURES

- Figure 1: Eccles Canyon Study Area
- Figure 2: Winter Quarters Canyon Study Area

1.0 INTRODUCTION

This report presents the methods and results of a one day sound monitoring survey conducted by Tetra Tech, Inc. (Tetra Tech) on June 08, 2010, as requested by Canyon Fuel Company's Skyline Mine. Monitoring was conducted on and adjacent to the Skyline Mine in association with the continued development of underground coal mining in Carbon County, Utah. The study area is located in both public (Manti La Sal National Forest) and private parcels around Eccles Canyon and Winter Quarters Canyon near the town of Scofield, UT. (**Figure 1** and **Figure 2**)

Sound level monitoring was implemented to obtain data on sound levels around an existing ventilation fan at the Skyline Mine, to collect baseline sound levels around a proposed ventilation fan location in Winter Quarters Canyon, and to supplement Tetra Tech's March 13, 2009 Wildlife Studies Summary. Data collected at each site may be used to establish baseline information on sound generated by the operational ventilation shaft fan and sounds generated by the immediate environment.

2.0 METHODS

2.1 Sound Monitoring Locations

All sound monitoring sites were located on and adjacent to the Skyline Coal Mine area and adjacent to Winter Quarters Canyon as determined through consultation with Canyon Fuel Company. Sound level measurements were collected at the operational ventilation fan, herein referred to as the source, and at intervals from the source and proposed fan location. Sound level measurements were also collected along US Highway 96 and within the town of Scofield. Sound level monitoring locations, existing fan location, and the proposed fan location are detailed in **Figure 1** and **Figure 2**.

Eccles Canyon, the location of the existing fan, was chosen for comparative analysis based upon its similarities to Winter Quarters Canyon. Eccles Canyon is located approximately 2.5 miles directly south of Winter Quarters Canyon and was selected based upon topographic, vegetational, and environmental similarities to Winter Quarters Canyon.

Details of the proposed fan have not been provided, however Canyon Fuel staff have indicated that the fan will be similar to the fan presently in use at Skyline Mine. For the purposes of this study, the proposed Winter Quarters fan is assumed to be similar in size, shape, and design as the existing fan facilities at Skyline Mine.

2.2 Sound Monitoring Methods

All sound monitoring was conducted using 2 Quest Technologies Model 2200 sound level meters. Sound levels were recorded as A-weighted decibels (dBA) with measurements collected during a two minute period. Maximum (MAX), minimum (MIN), and the equivalent continuous noise level (AVG) sound levels were recorded. Environmental conditions, vegetative cover, date, time, observer, and weather conditions were also recorded at the time of the recording for each sound monitoring location.

Sound level measurements were taken during daylight hours (7:00am – 5:00pm) and within manufacturer's temperature specifications. Measurements were taken during dry (no precipitation) and calm (wind less than five meters per second (m/s)) periods. Wind was

measured prior to each sound level measurement with a hand-held anemometer. The sound level meters were fitted with windscreens to reduce wind-generated sound and directed at the source approximately one meter (m) off the ground. The sound level meters were calibrated at a sound pressure of 114 dBA, before each day of survey. Terminal calibrations, using the 114 dBA standard, were conducted at the end of each day to ascertain the instruments continued accuracy through the survey period.

3.0 RESULTS

Sound level measurements taken within Eccles Canyon and Winter Quarters Canyon study areas are included in **Table 1**. Sounds recorded during the sound study ranged between 30.2 dBA and 108.7 dBA. Minimum, maximum, and average sound level measurements are detailed for each sound monitoring location.

Table 1: Sound Monitoring Data

Location (Meters from Fan)	Fan Audible	Sound Level (dBA)		
		AVG	MIN	MAX
Skyline Ventilation Fan Eccles Canyon	Y	106.8	106.4	108.7
160 m (line of sight)	Y	75.9	71.6	79.9
Up Canyon				
372 m	Y	57.4	55.0	59.4
947 m	Y	41.2	37.9	57.5
1200 m	Y	40.9	39.6	47.5
1740 m	Y	39.9	34.7	51.9
Down Canyon				
484 m	Y	52.3	50.5	55.3
650 m	Y	50.6	47.6	56.1
1000 m	Y	48.6	45.5	55.8
1300 m	Y	44.6	42.6	53.7
1560 m	Y	42.4	39.1	53.9
1880 m	Y	45.8	42.1	53.9
2210 m	Y	45.1	43.6	50.4
2480 m	Y	39.5	38.0	50.4
3050 m	N	41.8	39.7	45.9
3930 m	N	43.7	41.2	58.4
Winter Quarters Canyon & Scofield, UT	N			
0 m (Proposed Fan Location)	N	42.1	40.0	56.9
Up Canyon				
321 m	N	52.6	51.6	54.3
635 m	N	49.1	47.5	54.2
Down Canyon				
321 m	N	39.7	35.3	49.1
624 m	N	44.3	42.8	52.1
946 m	N	47.9	46.5	54.2
1249 m	N	48.5	46.0	55.5
1561 m	N	43.7	42.4	51.6

Location (Meters from Fan)	Fan Audible	Sound Level (dBA)		
		AVG	MIN	MAX
1873 m	N	46.7	44.3	59.2
2185 m	N	43.5	38.5	60.4
2497 m	N	45.0	38.2	63.2
2809 m	N	41.9	34.2	57.0
3270 m (US Hwy 96)	N	36.8	30.2	50.7
3320 m (US Hwy 96)	N	51.3	41.2	68.2
3370 m (Town of Scofield)	N	41.5	33.9	51.2

Background outdoor sound levels, measured in the Winter Quarters Canyon study area were between 30.2 dBA and 68.2 dBA. Average sound levels for this study area were determined to be 47.2 dBA. These sound measurements were calculated using data from sampling locations where no operational fan or other Skyline Mine activities were audible. These values were collected within the study area, and will be recognized as a baseline for this evaluation.

3.1 Existing Ventilation Fan

The ventilation fan, presently in operation at the Skyline Mine, is situated in Eccles Canyon approximately 150 m below the surrounding ridge of Eccles Canyon. Eccles Canyon is vegetated on southern slopes by conifer trees and predominantly sage brush and aspen on the northern slopes. It is estimated that these vegetative communities comprise approximately of 80 percent ground cover. Conifer trees present in Eccles Canyon appear to have experienced stress or death from detrimental insects or disease. A flowing stream is present in the bottom of Eccles Canyon and several rock outcrops were noted. A two lane paved highway (UT-264) is located in the valley bottom along with a coal conveyor system that parallels the road from the Skyline Mine to the load-out located approximately 4,200 meters (2.5 miles) east of Skyline Mine.

Maximum sound levels between 106.4 dBA and 108.7 dBA were recorded at the source, and decreased as distance between the source and sound monitoring locations increased. Sound generated by the source was continuous and produced ranges up to ± 2 dBA between MAX and MIN recordings. Greater decibel ranges were noted (2.3-19.6 dBA) as distance increased between the source and monitoring point locations. These larger ranges can be attributed to affects of wind, line of sight, echoing, vegetative cover, and topography on the sound level measurements. The sound levels from the existing fan decreased with distance, however no definitive distance was found to be indicative of reaching ambient sound levels.

Sound level measurements were used to generate distance versus sound level curves and are detailed in **Graph 1**. All data collected along the sound level transects were graphed for the AVG (equivalent continuous sound) sound level in the following graph. Data displayed to the right and left of the source (0m) were collected up and down Eccles Canyon respectively.


The greatest distance from which the fan was audible was determined to be 2480 m away from the source east in Eccles Canyon. Sound levels recorded at this location ranged between 28.4 dBA to 54.5 dBA. Though the fan was audible, the recorded sound levels were near average background sound levels (47.2 dBA) during the time of the survey.

Line of sight sound monitoring was conducted when staff identified the source with no visual interruption between the sound level meter and the source. The greatest distance in which a

line of sight measurement was conducted was 160 m. Sound level measurements at this distance were between 71.6 dBA and 79.9 dBA. These line of sight readings are 28 dBA to 34 dBA lower than source level readings (106.4 dBA to 108.7 dBA) at 160 m to the south of the source sounds.

Graph 1 shows average recorded source sound levels (106.8 dBA) dropping to values at or near average background sound levels (47.2 dBA) at a distance between 600 m and 1200 m away from the source. A linear rate of source sound reduction calculated from this analysis shows a reduction rate of 0.049 decibel/m (59.6 dBA/1200m). Given that vegetative cover, geomorphology, or topography was impeding the sound travel in and around the source, this reduction rate (0.049 dBA/m) should be considered as a conservative scenario for sound reduction within the study area.

Graph 1: Sound Levels Measured at Existing Skyline Mine and Average Background Sound Measured in Winter Quarters Canyon

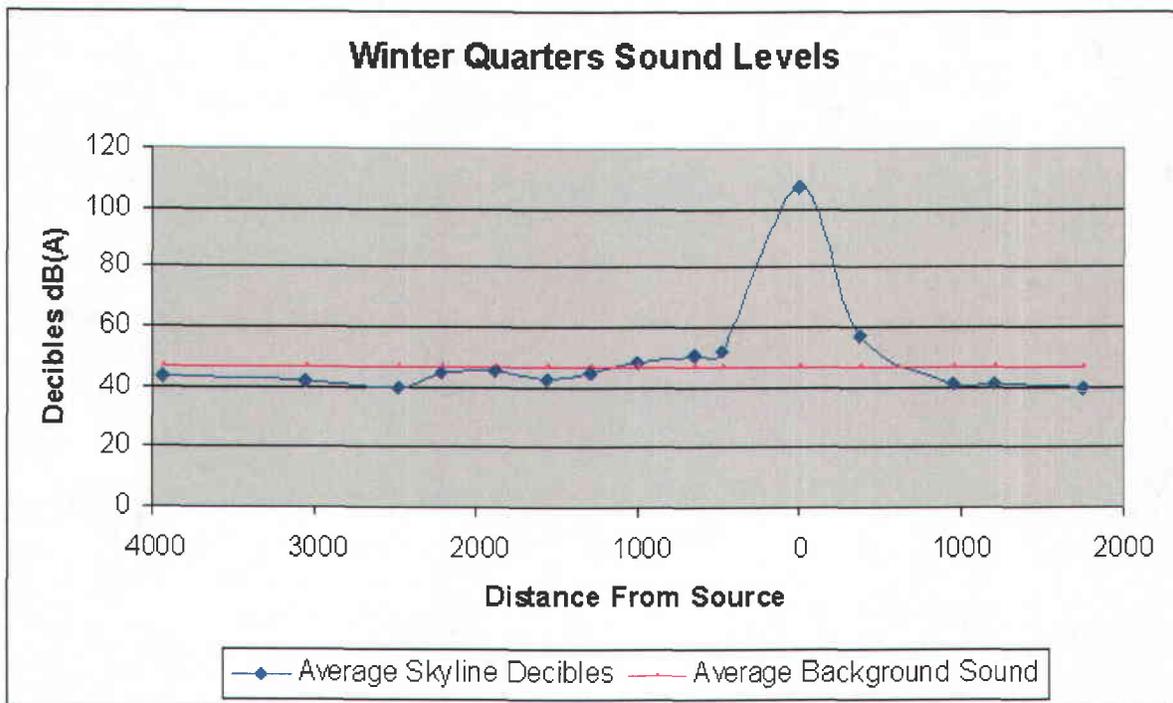

Amplification of source sounds within Eccles Canyon may have resulted in higher sound level readings near the Skyline Mine and support facilities. Echoing effects, generated from the mine infrastructure (buildings, silos, roads and conveyor) within the canyon, may have produced sound level amplification and resulted in higher sound level readings. Data collected within and above the canyon suggests these effects are most apparent at monitoring locations located within sight of the Skyline Mine. These increases in average sound level measurements were identified in the 500m to 1000m distances down canyon (left of 0m in **Graph 1**) from the Skyline Mine.

Source sound level reduction was observed during this sound study, and was observed on several sound monitoring locations above (right of 0m in **Graph 1**) Skyline Mine. These reductions result from the presence of vegetative buffers and topographic features within the

study area. Vegetative buffers, consisting of both trees and shrubs, occur on both sides of Eccles Canyon and aid in the buffering and subsequent reduction of sound levels above and below the Skyline Mine. It is likely that the rapid reduction in sounds above the Skyline Mine is a result of a prevalence of conifer growth above the mine, resulting in greater sound buffering capacities.

Topographic features such as hills, mountains, or bends in a canyon also create reductions in source sounds by shielding or sound shadowing effects. Sound from the source is reduced by the elevational differences and relief between the source and sound recording locations. These effects were identified in sound readings above the source (right of 0m in **Graph 1**) where sound monitoring stations were not within sight of the Skyline Mine. Bends and topographic relief in Eccles Canyon between the source and sound monitoring locations down canyon also contribute to the overall reduction of source sounds. No determination on the overall sound reducing effects of these bends and relief could be determined given that no straight line sound monitoring stations were recorded at similar distances.

3.2 Proposed Ventilation Fan

This proposed ventilation fan site is located in a natural valley and is surrounded by ridges to the north and south, Winter Quarters Ridge, the Manti-La Sal National Forest to west, and the town of Scofield to the east (**Figure 1**). A flowing stream is present in the bottom of the canyon. Modern and historic campsites, foundations, walls, and equipment from human activities are located east of the proposed fan location.

The proposed ventilation fan location is situated 250 m below the surrounding ridge of Winter Quarters Canyon, and is vegetated on southern slopes by conifer and aspen trees with sagebrush and small rock out-crops on the northern slopes. It is estimated that these vegetative communities comprise approximately 80 percent ground cover. Similar to Eccles Canyon, some conifer trees present in the canyon appear to have experienced stress or death from detrimental insects or disease.

Winter Quarters Canyon is a relatively straight canyon and opens to agricultural and residential development approximately 2500 m (1.5 miles) east of the proposed fan location. While Winter Quarters Canyon is relatively straight, topographical relief prevents the proposed fan location from being seen from the mouth of the Canyon and Scofield.

Sound level measurements taken within Winter Quarters Canyon and locations near Scofield ranged between 30.2 dBA and 68.2 dBA. A value of 47.2 dBA was calculated as an average sound level for Winter Quarters Canyon and Scofield. Given that no mine associated sounds were noted within Winter Quarters Canyon and Scofield, these values were used as the ambient sound baseline for this sound study (**Table 1**).

Sound level measurements taken in the town of Scofield were noted to be higher than those observed in Winter Quarters Canyon. This increase in ambient sound levels were attributed to the sounds associated with residential activities and sounds produced from traffic on US Highway 96. Sounds from the existing Skyline Mine ventilation fan were not discernible in or around Scofield.

4.0 SUMMARY

These determinations of potential sound impacts have been based upon sound level data collected at the existing fan and data collected in Winter Quarters and Scofield. Assumptions for these determinations are based on the environmental and locational similarities between Winter Quarters and Eccles Canyon and that the proposed ventilation fan will be similar in size, shape, power, and orientation to the existing fan.

Since this study only addresses sound level measurements over a one day period in early summer 2010, it does not address temporal differences that may exist in the study area. These differences may need to be addressed should further sound studies be conducted. Factors such as time of day, wind patterns, and seasonal events may need to be included in future sound surveys within the area. No sound level modeling was developed in this study.

None of the data developed from this Sound Study is contradictory with the data presented in the Tetra Tech 2009 Winter Quarters Canyon Wildlife Studies Summary. Based upon data collected during this and previous inventories, Tetra Tech still anticipates minimal impacts to wildlife in the vicinity of the proposed fan.

4.1 Existing Ventilation Fan

The greatest distance from which the fan was audible was determined to be 2480 m away from the source east in Eccles Canyon. Sound levels recorded at this location ranged between 28.4 dBA to 54.5 dBA. Though the fan was audible, the recorded sound levels were near average background sound levels (47.2 dBA) during the time of the survey. Sounds generated by the source and measured at 2480 m distance were buffered by vegetation, topographic relief, and elevational differences between the source and sound recording location. It is anticipated that sounds generated from the proposed fan will be similar to those identified at the existing fan. Sounds generated from the existing fan could be perceived or measured differently depending on environmental conditions or time of year.

4.2 Proposed Ventilation Fan

The proposed fan location is presently situated in a valley and, assuming all engineering and technical components are substantially similar to the fan in Eccles Canyon, is expected to experience sound levels similar to sounds recorded at the existing fan.

Based upon readings collected in Eccles Canyon, it is anticipated that sounds from the proposed fan could likely be within 3-5 decibels of background levels within 500 m of the source. These measurements were obtained in locations where no direct line-of-sight existed between the sound measuring location and the fan. Locations, which are directly within line-of-sight of the proposed fan, and within 500 m, may experience greater sound levels. These locations would include areas above the proposed fan on the surrounding slopes of Winter Quarters Canyon. These assumptions do not take into consideration engineering differences such as the direction of the fan as placed in the canyon, sound dampening of duct work, and sound absorption materials used in the fan construction.

Though the proposed fan may be audible beyond 500 m, the fan sounds would be at or near average background sound levels (47.2 dBA) within approximately 1000 m. In addition, through the implementation of sound reduction technology at the fan site, we anticipate that the sound

levels from the proposed fan would likely decrease, reducing the distance that the fan sounds are above background sound levels to less than 1000 m.

Amplification of source sounds from the proposed fan are anticipated to be minimal. Given that there are no large facilities, roads, or conveyors present in Winter Quarters Canyon it is expected that amplification of source sound could be less than those sounds experienced near the existing fan in Eccles Canyon. While small areas of rock outcrops that could potentially produce echoing or amplification effects are present within Winter Quarters Canyon, it is unlikely that these natural features are large enough to produce significant changes in sounds within the canyon.

Source sound level reduction was observed during this study and is expected to occur in areas around the proposed fan. Vegetation around the proposed fan would aid in the reduction of sound impacts in the vicinity. Vegetated areas (conifers and aspen) south and west of the proposed fan location are expected to exhibit the greatest amount of sound buffering and subsequent sound reduction. Though sagebrush vegetative buffers on the north side of the canyon would create some sound buffering, it is anticipated that larger vegetation such as conifers and aspens on the south side would provide the greatest reduction in sounds.

Topographic features around the proposed ventilation fan would also likely reduce sound travel. The proposed fan is located in a vegetated valley below Winter Quarters Ridge and above the town of Scofield. Ridges, valleys, and bends in the canyons to the north, south, and west of the proposed fan are expected to contribute the greatest amount of sound level reduction by sound shadowing. However, due to the relatively straight formation of Winter Quarters Canyon, sounds traveling east toward Scofield, would have fewer obstructions than those identified in Eccles Canyon.

References:

Tetra Tech (2009) Winter Quarters Canyon Wildlife Studies Summary for 2006 through 2008.
Prepared for Canyon Fuel Company, Skyline Mine. Report Dated March 19, 2009. 4pp.

FIGURE 1
ECCLES CANYON STUDY AREA

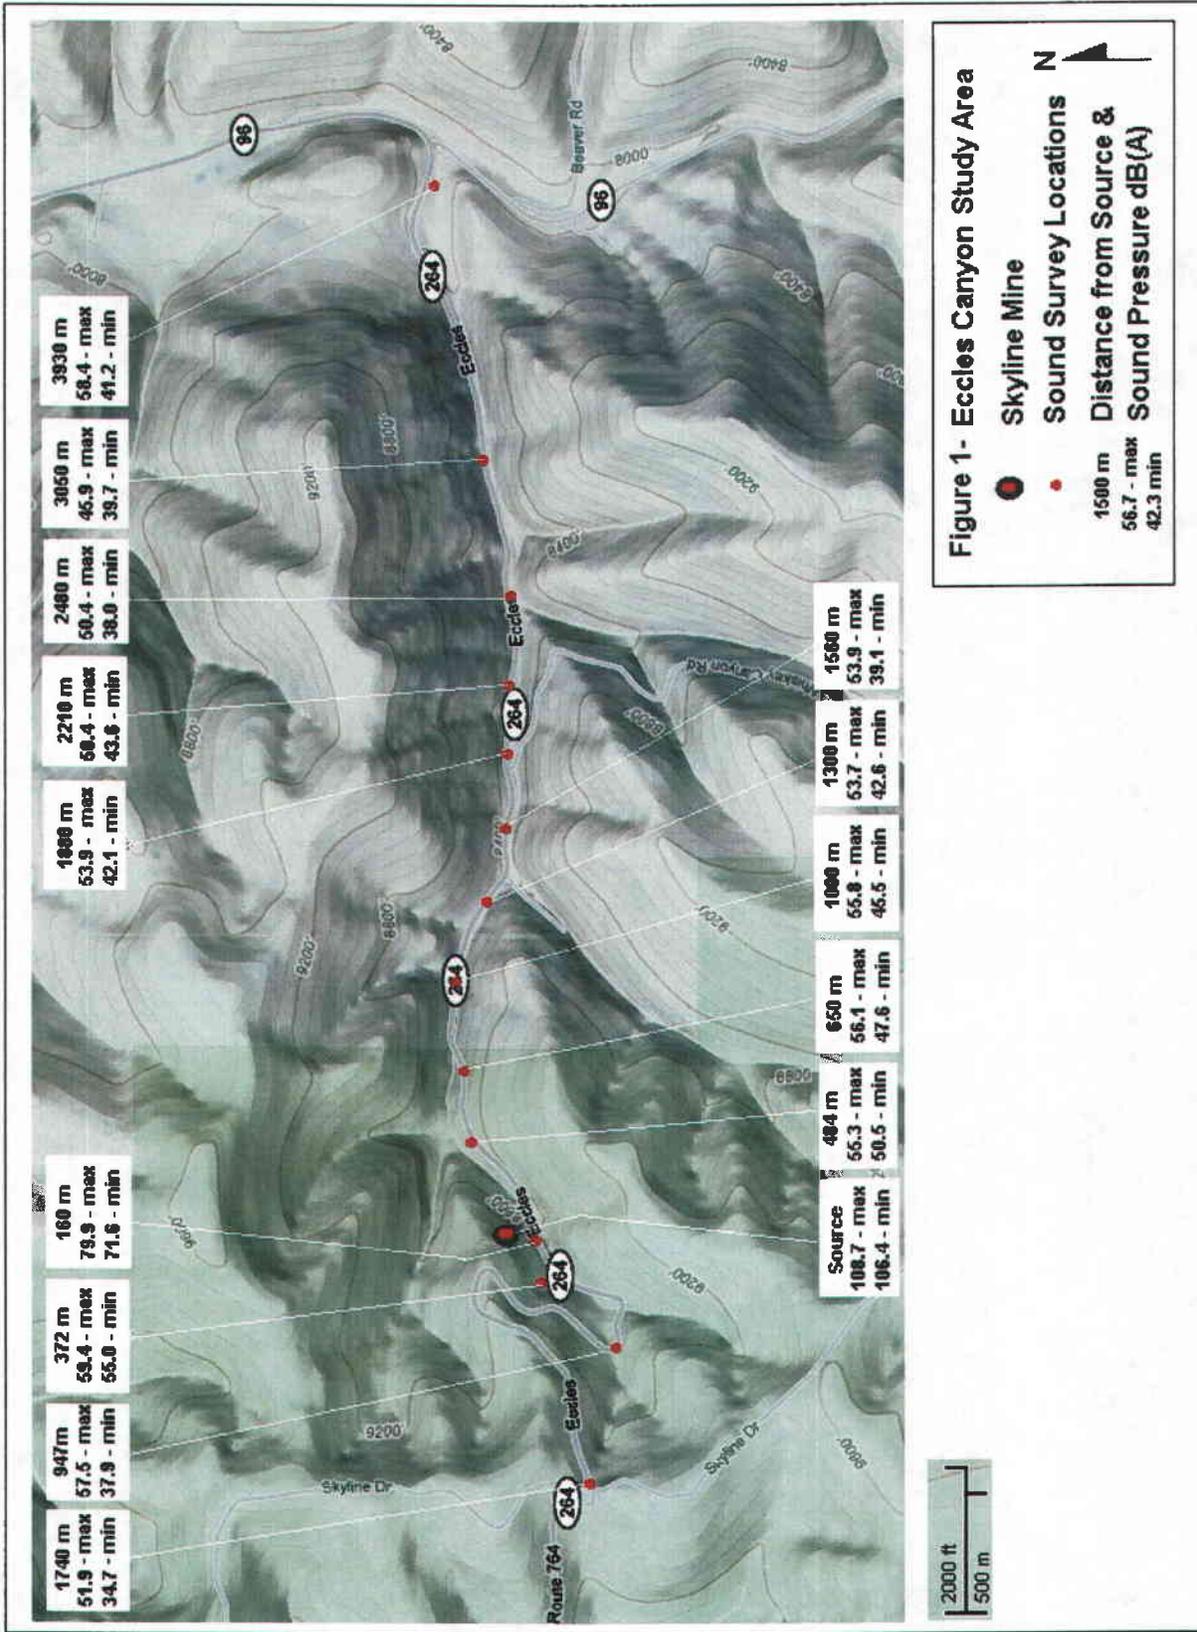


FIGURE 2
WINTER QUARTERS CANYON STUDY AREA

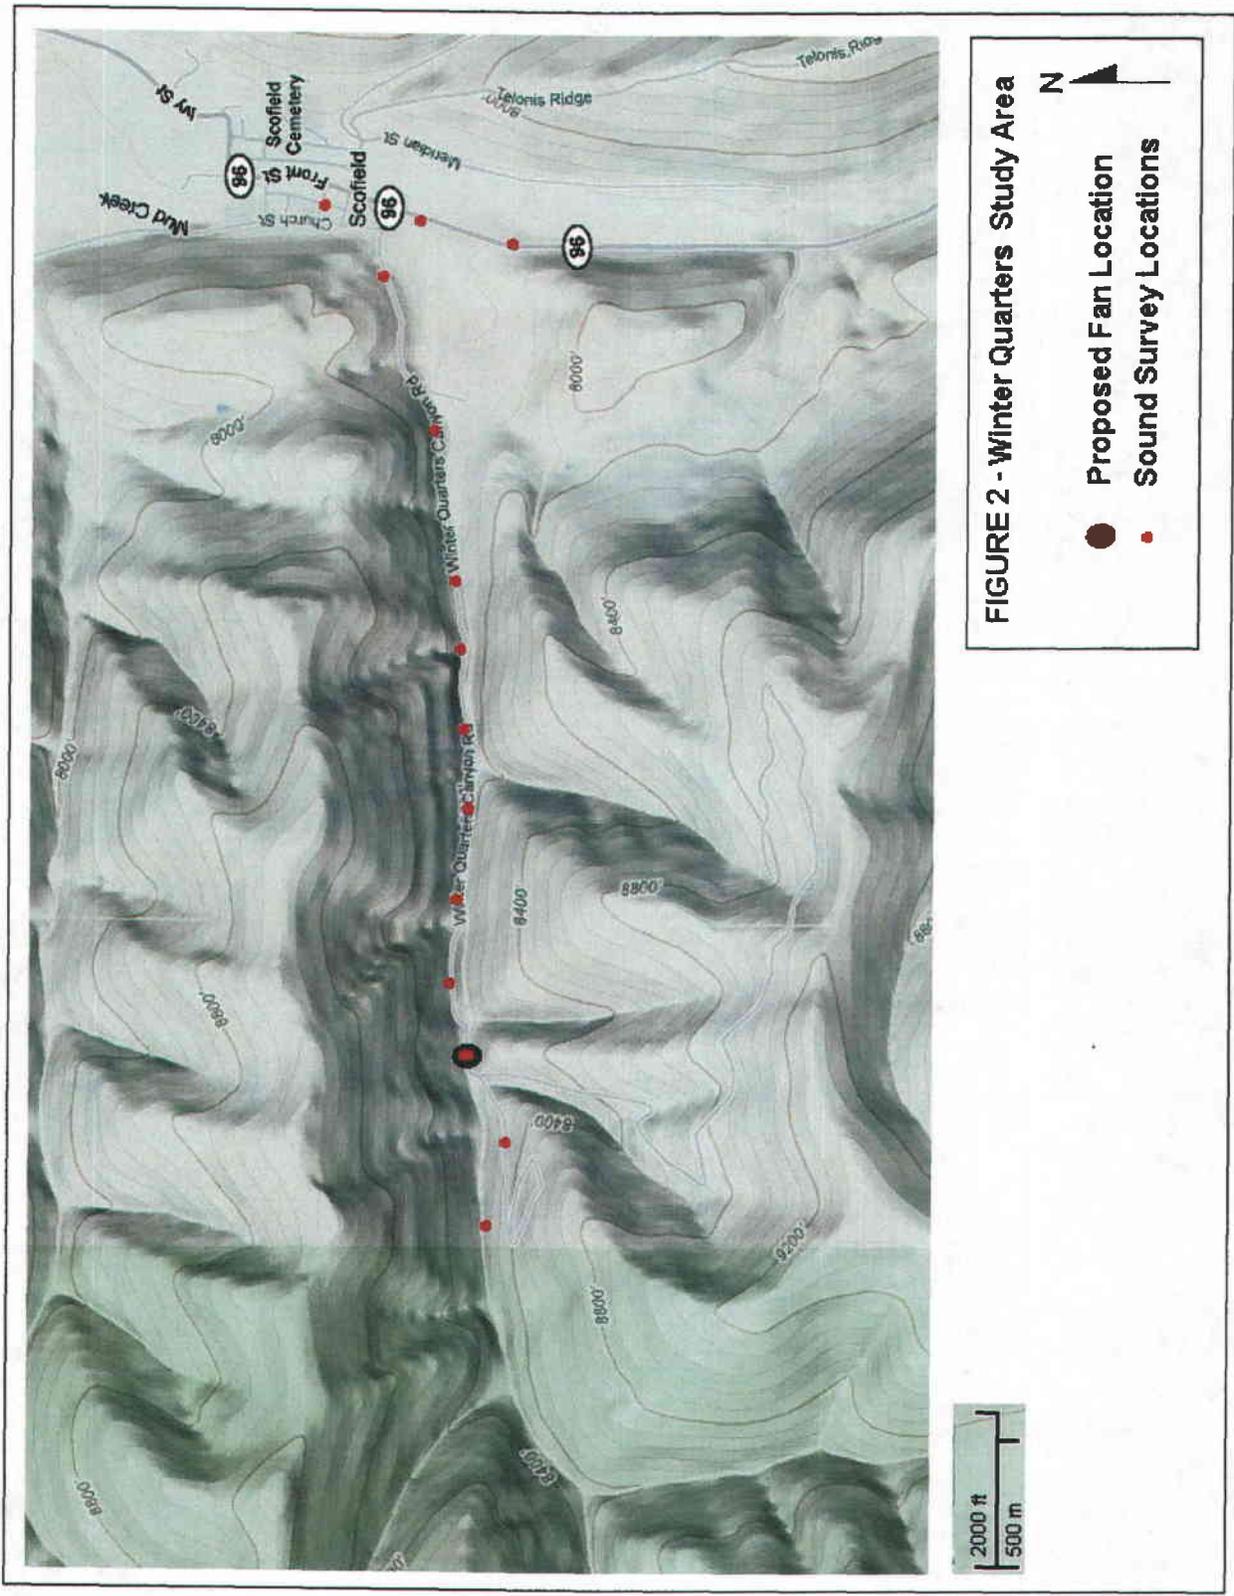


FIGURE 2 - Winter Quarters Study Area

- Proposed Fan Location
- Sound Survey Locations