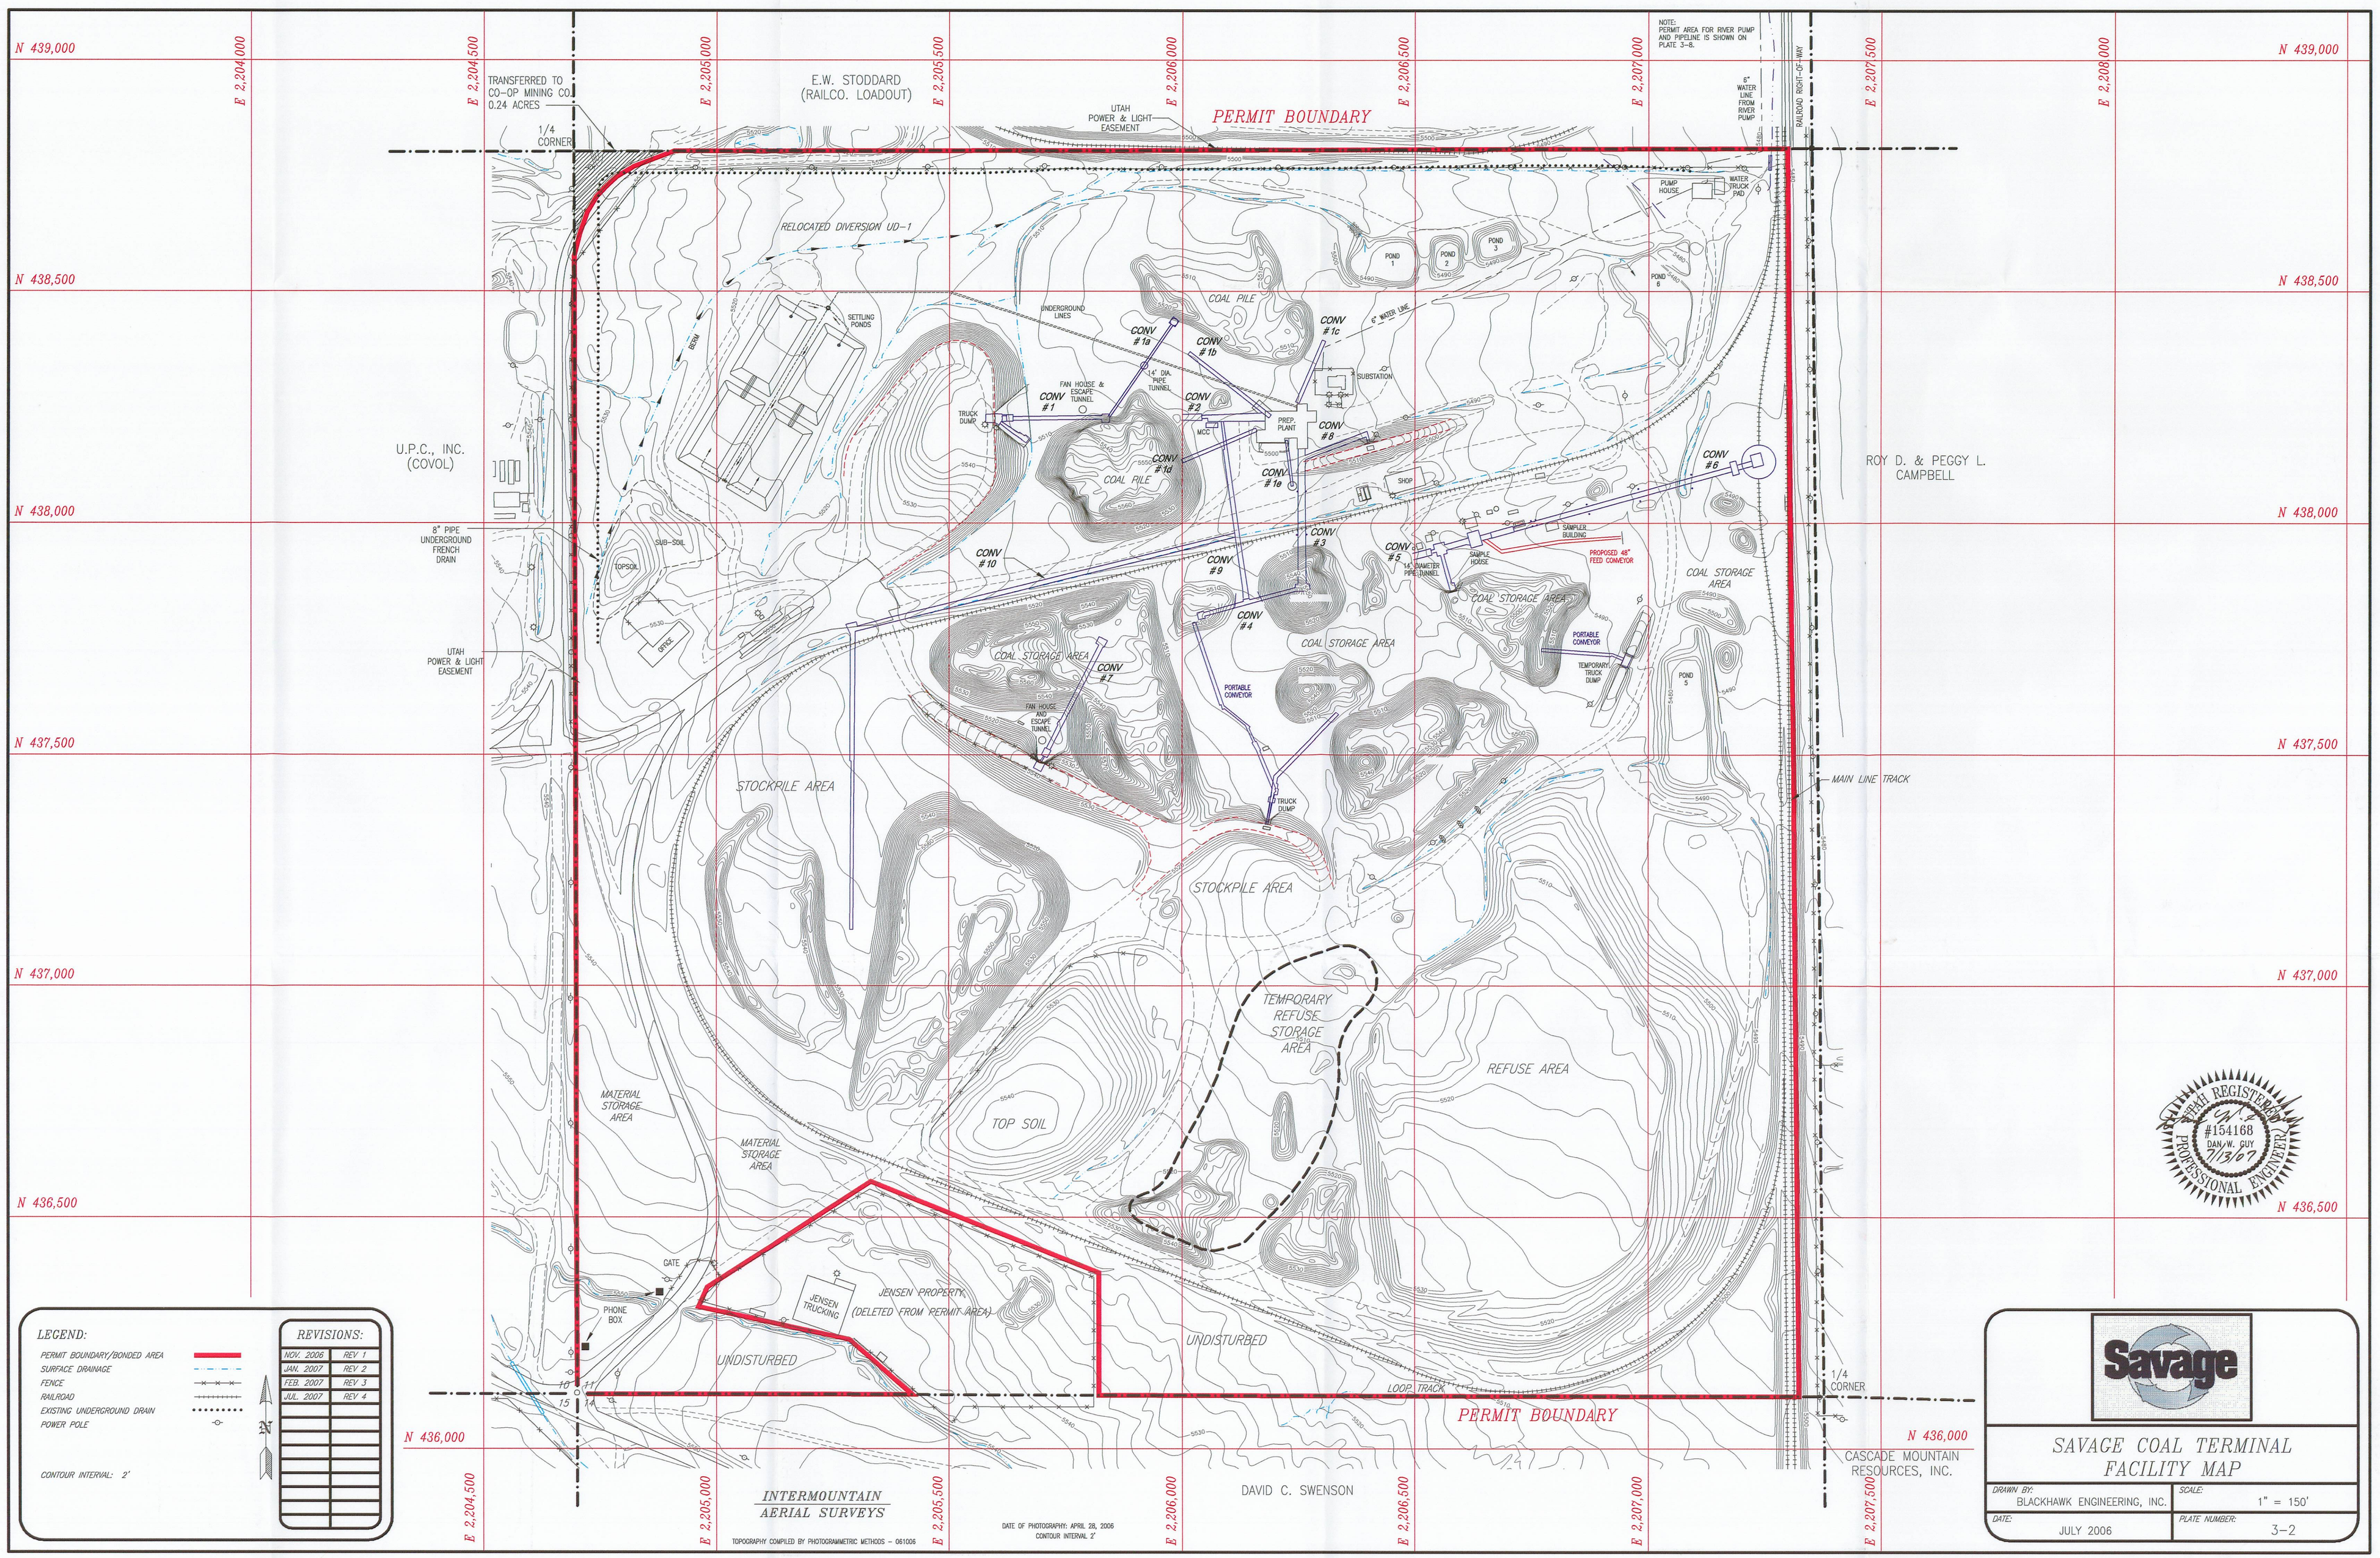
N 439,000
N 438,500
N 438,000
N 437,500
N 437,000
N 436,500
N 436,000
E 2,204,000
E 2,204,500
E 2,205,000
E 2,205,500
E 2,206,000
E 2,206,500
E 2,207,000
E 2,207,500
E 2,208,000
TRANSFERRED TO CO-OP MINING CO. 0.24 ACRES
1/4 CORNER
E.W. STODDARD (RAILCO. LOADOUT)
UTAH POWER & LIGHT EASEMENT
PERMIT BOUNDARY
NOTE: PERMIT AREA FOR RIVER PUMP AND PIPELINE IS SHOWN ON PLATE 3-8.
6" WATER LINE FROM RIVER PUMP
RAILROAD RIGHT-OF-WAY
PUMP HOUSE
WATER TRUCK PAD
RELOCATED DIVERSION UD-1
POND 1
POND 2
POND 3
POND 6
COAL PILE
UNDERGROUND LINES
SETTLING PONDS
BERM
CONV #1a
CONV #1b
CONV #1c
CONV #1d
CONV #1e
CONV #1
CONV #2
CONV #3
CONV #4
CONV #5
CONV #6
CONV #7
CONV #8
CONV #9
CONV #10
6" WATER LINE
14" DIA. PIPE TUNNEL
FAN HOUSE & ESCAPE TUNNEL
TRUCK DUMP
PREP PLANT
MCC
SUBSTATION
SHOP
U.P.C., INC. (COVOL)
ROY D. & PEGGY L. CAMPBELL
8" PIPE UNDERGROUND FRENCH DRAIN
UTAH POWER & LIGHT EASEMENT
TOPSOIL
SUB-SOIL
OFFICE
SAMPLER BUILDING
SAMPLE HOUSE
PROPOSED 48" FEED CONVEYOR
COAL STORAGE AREA
PORTABLE CONVEYOR
TEMPORARY TRUCK DUMP
POND 5
MAIN LINE TRACK
STOCKPILE AREA
TEMPORARY REFUSE STORAGE AREA
REFUSE AREA
TOP SOIL
MATERIAL STORAGE AREA
GATE
PHONE BOX
JENSEN TRUCKING
JENSEN PROPERTY (DELETED FROM PERMIT AREA)
UNDISTURBED
LOOP TRACK
1/4 CORNER
CASCADE MOUNTAIN RESOURCES, INC.
DAVID C. SWENSON
INTERMOUNTAIN AERIAL SURVEYS
TOPOGRAPHY COMPILED BY PHOTOGRAMMETRIC METHODS – 061006
DATE OF PHOTOGRAPHY: APRIL 28, 2006
CONTOUR INTERVAL 2'
UTAH REGISTERED #154168 DAN W. GUY 7/13/07 PROFESSIONAL ENGINEER
LEGEND:
PERMIT BOUNDARY/BONDED AREA
SURFACE DRAINAGE
FENCE
RAILROAD
EXISTING UNDERGROUND DRAIN
POWER POLE
CONTOUR INTERVAL: 2'
REVISIONS:
NOV. 2006 REV 1
JAN. 2007 REV 2
FEB. 2007 REV 3
JUL. 2007 REV 4
Savage
SAVAGE COAL TERMINAL FACILITY MAP
DRAWN BY: BLACKHAWK ENGINEERING, INC.
SCALE: 1" = 150'
DATE: JULY 2006
PLATE NUMBER: 3-2