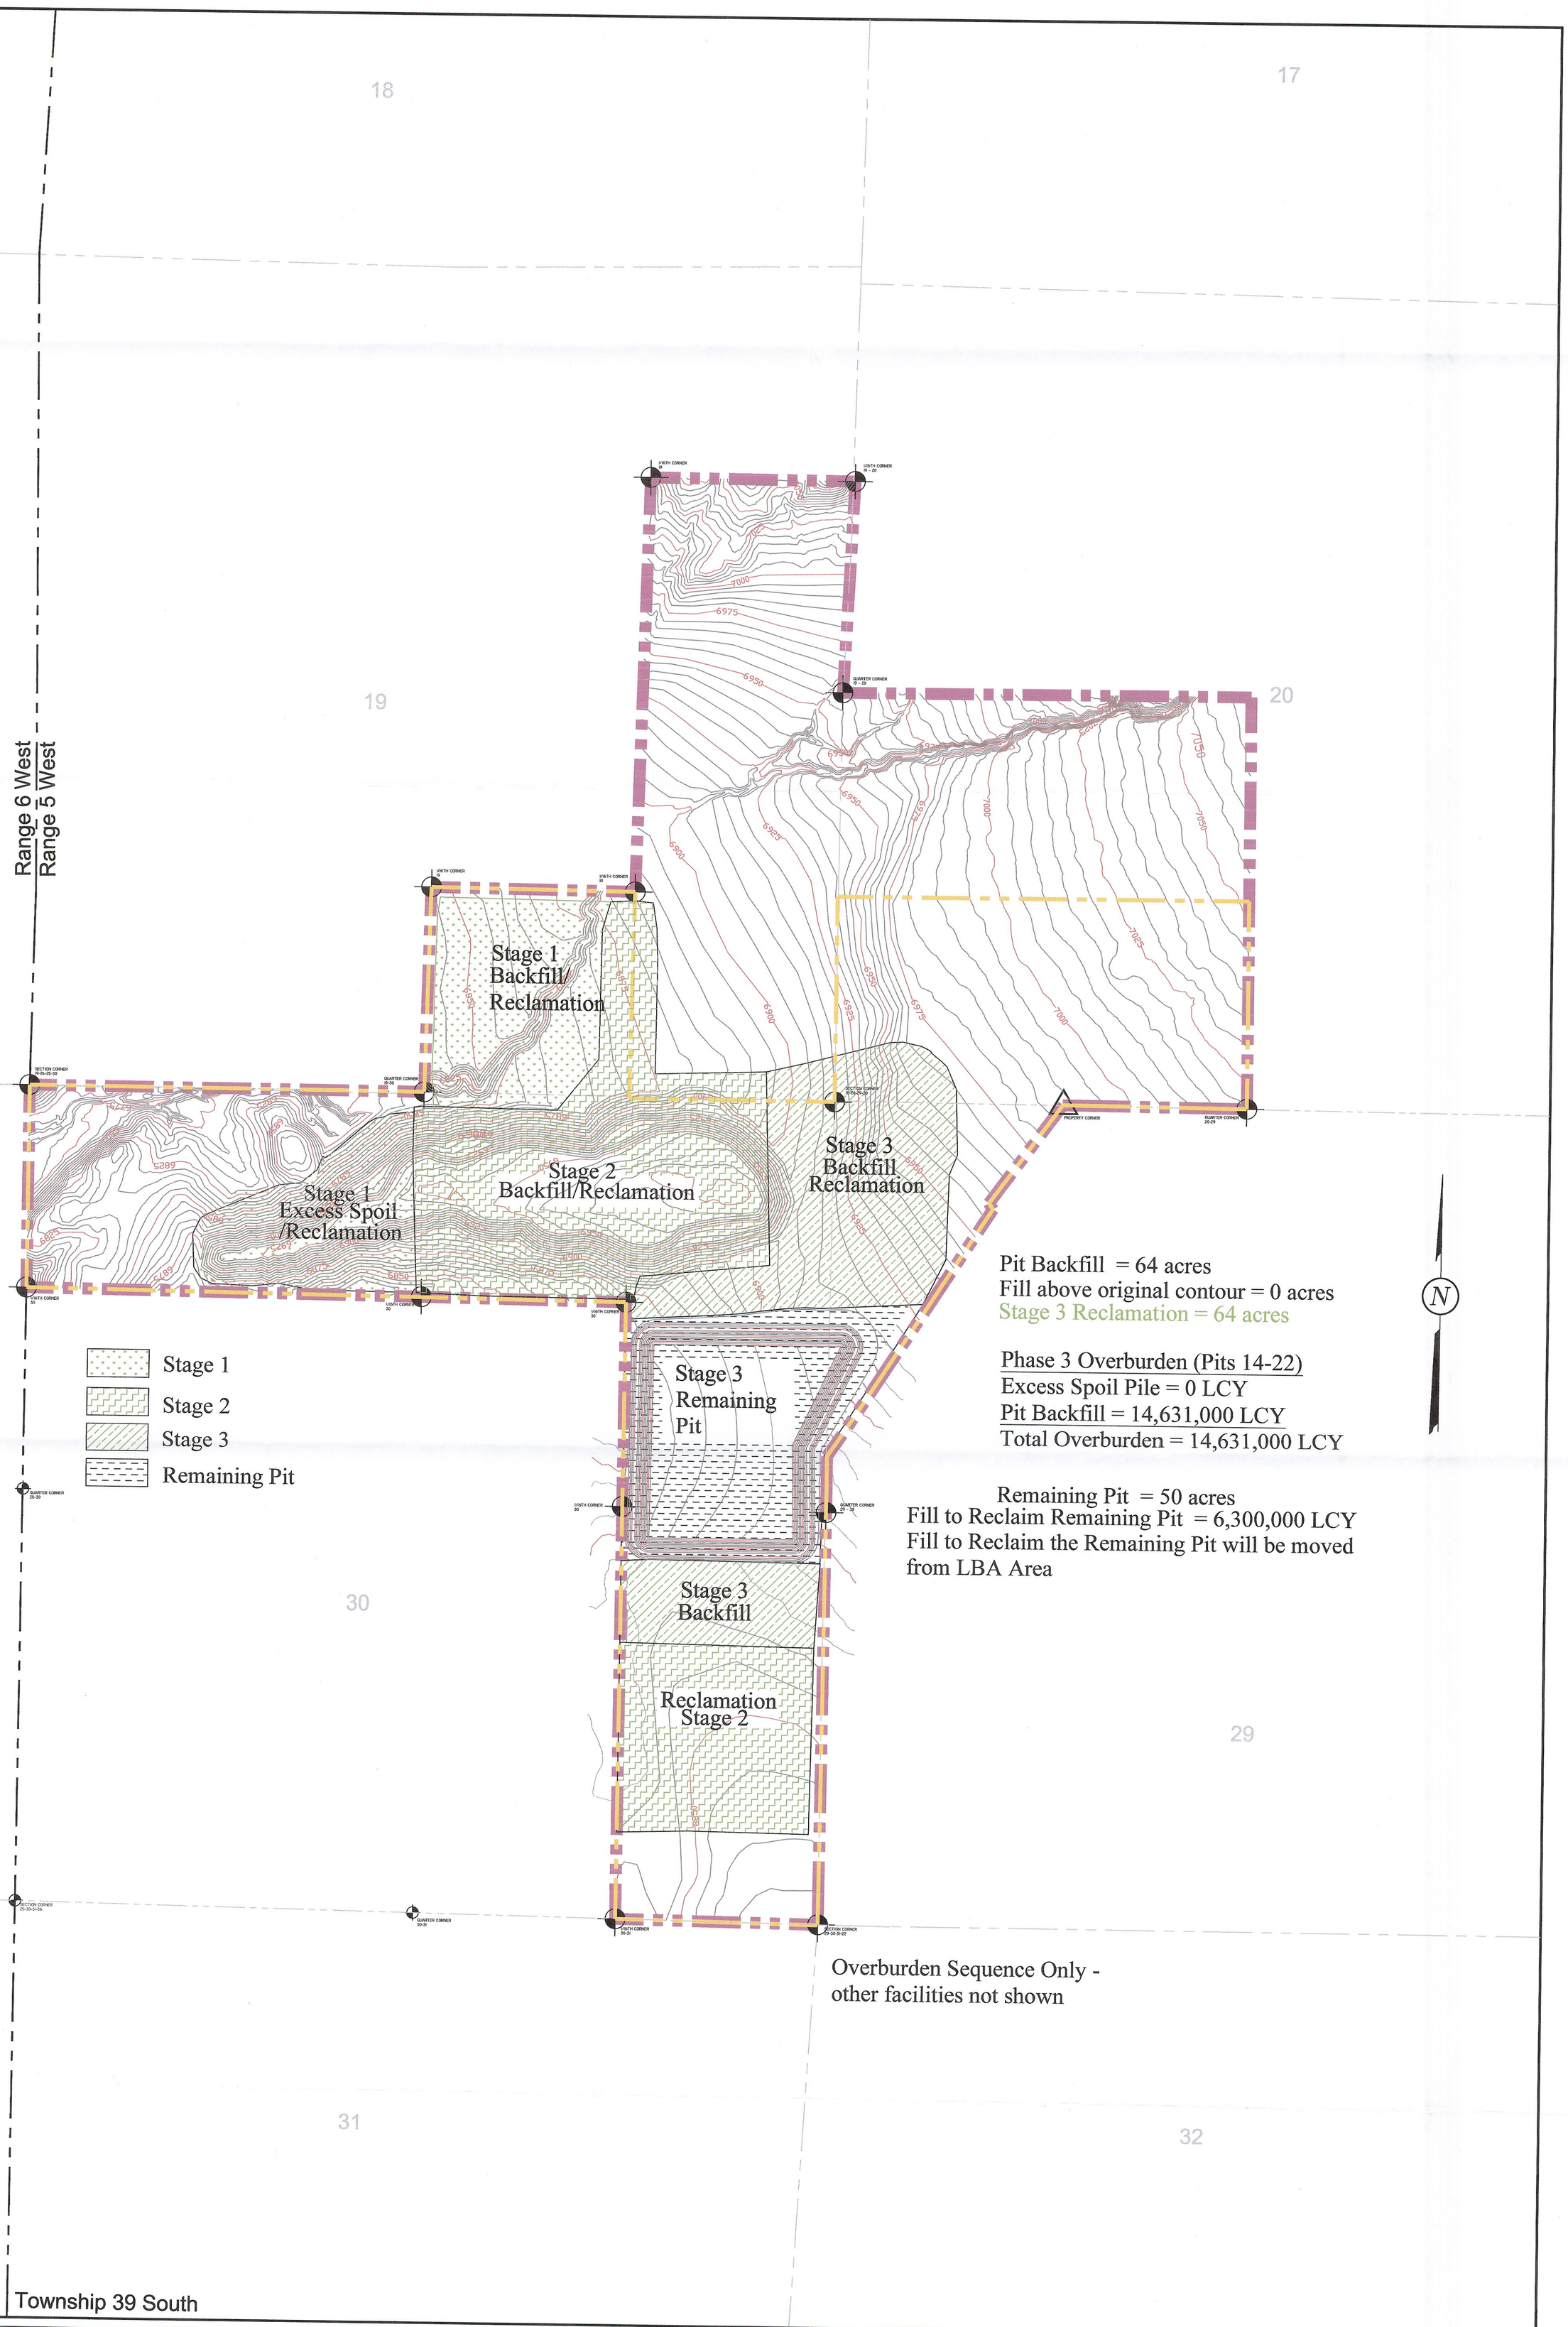


Pit Backfill = 64 acres
Fill above original contour = 0 acres
Stage 3 Reclamation = 64 acres

Phase 3 Overburden (Pits 14-22)
Excess Spoil Pile = 0 LCY
Pit Backfill = 14,631,000 LCY
Total Overburden = 14,631,000 LCY

Remaining Pit = 50 acres
Fill to Reclaim Remaining Pit = 6,300,000 LCY
Fill to Reclaim the Remaining Pit will be moved from LBA Area

Overburden Sequence Only - other facilities not shown

LEGEND:
- PERMIT BOUNDARY
- PRIVATE COAL OWNERSHIP
- COAL LINE BOUNDARY
- SECTION LINE
- FOUND SECTION CORNER
- FOUND PROPERTY CORNER

| DRAWN BY: | CHECKED BY: |
|---|---|
| C. McCOURT | LWJ |
| DRAWING: 5-19 | DATE: 4/20/07 |
| | SCALE: 1" = 500' |
| JOB NUMBER: 1400 | SHEET |

REVISIONS

| DATE: | BY: |
|---|---|
| 11/28/08 | CRM |
| 01/31/13 | KN |

# OVERBURDEN REMOVAL STAGE 3

COAL HOLLOW PROJECT
ALTON, UTAH

DRAWING: 5-19

Registered Professional Engineer
167590
LARRY J. ADAMS
State of Utah
2/7/13

Alton Coal Development
Coal Hollow Project
463 North 100 West, Suite 1
Cedar City, Utah 84721
Phone (435)867-5331
Fax (435)867-1192

RECEIVED
FEB 12 2013
DIV. OF OIL, GAS & MINING